


FAST RECOVERY RECTIFIER DIODES

- HIGH REVERSE VOLTAGE CAPABILITY
- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING

Cathode connected to case



TO220AC
(Plastic)

SUITABLE APPLICATIONS

- FREE WHEELING DIODE IN CONVERTERS AND MOTOR CONTROL CIRCUITS
- RECTIFIER IN S.M.P.S.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
$I_{F,rm}$	Repetitive Peak Forward Current	100	A
$I_{F,(rms)}$	RMS Forward Current	16	A
$I_{F(av)}$	Average Forward Current	8	A
I_{fsm}	Surge non Repetitive Forward Current	50	A
P	Power Dissipation	17	W
T_{stg} T_j	Storage and Junction Temperature Range	- 40 to + 150	°C

Symbol	Parameter	BYT 08P-		Unit
		600	800	
$V_{R,rm}$	Repetitive Peak Reverse Voltage	600	800	V
$V_{R,srm}$	Non Repetitive Peak Reverse Voltage	640	850	V

THERMAL RESISTANCE

Symbol	Test Conditions	Value	Unit
$R_{th(j-c)}$	Junction-case	2	°C/W

ELECTRICAL CHARACTERISTICS**STATIC CHARACTERISTICS**

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
I _R	T _j = 25°C	V _R = V _{RRM}			35	μA
	T _j = 100°C				2	mA
V _F	T _j = 25°C	I _F = 8A			1.9	V
	T _j = 100°C				1.8	

RECOVERY CHARACTERISTICS

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
t _{rr}	T _j = 25°C	I _F = 1A	dI _F /dt = - 15A/μs	V _R = 30V		120	ns
		I _F = 0.5A	I _R =1A	I _{rr} = 0.25A		50	

TURN-OFF SWITCHING CHARACTERISTICS (Without Series Inductance)

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
t _{IRM}	dI _F /dt = - 32A/μs	V _{CC} = 200V	I _F = 8A			160	ns
	dI _F /dt = - 64A/μs					100	
I _{RM}	dI _F /dt = - 32A/μs	L _p ≤ 0.05μH See Figure 1	T _j = 100°C			4	A
	dI _F /dt = - 64A/μs					5	

TURN-OFF OVERVOLTAGE COEFFICIENT - With Series Inductance

Symbol	Test Conditions				Min.	Typ.	Max.	Unit
$\zeta = \frac{V_{RP}}{V_{CC}}$	T _j = 100°C	V _{CC} = 150V	I _F = I _{F(AV)}				4	

To evaluate the conduction losses use the following equations :

$$V_F = 1.47 + 0.04 I_F$$

$$P = 1.47 \times I_{F(AV)} + 0.04 I_F^2(\text{RMS})$$

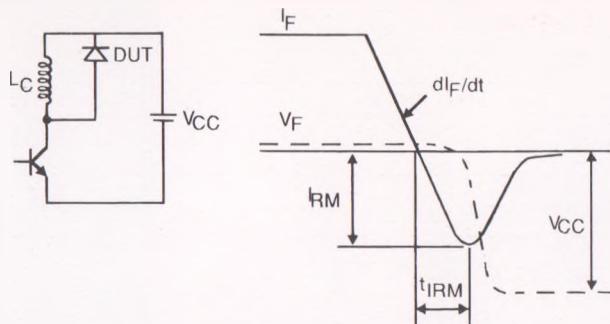


Figure 1 : Turn-off switching characteristics (without series inductance).

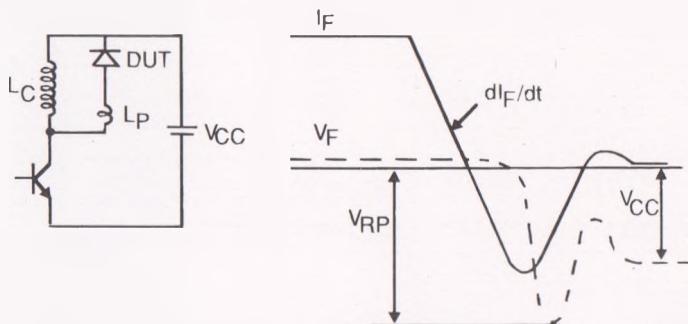


Figure 2 : Turn-off switching characteristics (with series inductance).