

PROGRAMMABLE CURRENT SENSING HIGH SIDE SWITCH

Features

- Load current feedback
- Programmable over current shutdown
- Active clamp
- E.S.D protection
- Input referenced to Vcc
- Over temperature shutdown
- Reverse battery protection


Description

The IR 3310 is a Fully Protected 4 terminal high side switch. The input signal is referenced to Vcc. When the input voltage Vcc - Vin is higher than the specified Vih threshold, the output power MOSFET is turned-on. When Vcc - Vin is lower than the specified Vil threshold, the output MOSFET is turned-off. A sense current proportional to the current in the power Mosfet is sourced to the Ifb pin. Over-current shutdown occurs when Vifb - Vin > 4 V. The current shutdown threshold is adjusted by selecting the proper RIfb. Either over-current and over-temperature latches off the switch. The device is reset by pulling the input pin high. Other integrated protections (ESD, reverse battery, active clamp) make the IR 3310 very rugged and suitable for the automotive environment.

Product Summary


Rds(on)	7mΩ max.
Vcc.op.	6 to 28V
Current ratio	8800
Ishutdown	10 to 100A
Active clamp	35V
Load Dump Max.	43V

Package



5 Lead TO220

Typical Connection

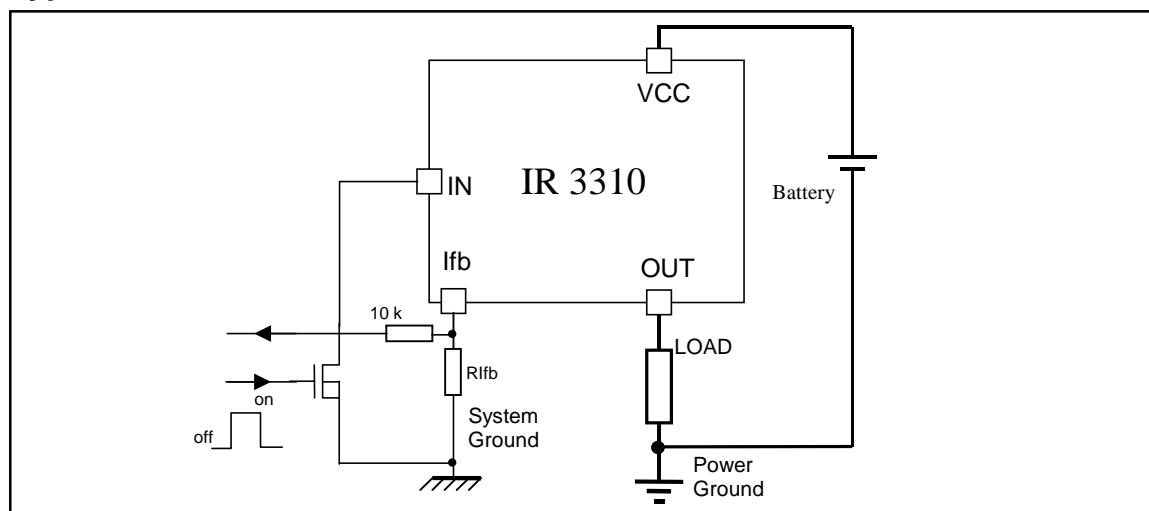

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are referenced to Vcc lead. (TAmbient = 25°C unless otherwise specified).

Symbol	Parameter	Min.	Max.	Units
Vcc - Vin max	Maximum input voltage	-16	50	V
Vcc-VIfb max	Maximum Ifb voltage	-0.3	50	
Vcc - Vout max.	Maximum output voltage	-0.3	30	
Ids cont.	Diode max. permanent current (Rth = 60 °C/W) (1)	—	2.8	A
Ids1 cont	Diode max. permanent current (Rth = 5 °C/W) (1)	—	35	
Ids pulsed	Diode max. pulsed current (1)	—	100	
ESD 1	Electrostatic discharge (human body model)	—	4	kV
ESD 2	Electrostatic discharge (machine model)	—	0.5	
Pd	Power dissipation (Rth = 60 °C/W)	—	2	W
TJ max.	Max. storage and junction temperature	-40	150	°C
Min RIfb	Minimum resistor on the Ifb pin	0.3	—	kΩ
Ifb max	Max. Ifb current	-20	+20	mA

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units
R _{th} free air	Thermal resistance - free air	60	—	°C/W
R _{th} junct. to case	Thermal resistance junction to case	0.7	—	°C/W

Recommended Operating Conditions

These values are given for a quick design. For operation outside these conditions, please consult the application notes.

Symbol	Parameter	Min.	Max.	Units
Vcc - Vin	Continuous input voltage	6	28	V
Vcc - VIfb	Continuous Ifb pin voltage	0.3	28	
Vcc	Supply to power ground voltage	6	28	
Iout	Continuous output current (Rth/amb < 5 °C/W, Tj = 125°C)	—	35	A
Iout 85°C amb.	Continuous output current (Rth/amb < 60 °C/W, Tj = 125°C)	—	6.5	
RIfb	Ifb resistor to program Ids and scale (2 & 3)	0.5	3.5	kΩ
Pulse min.	Minimum turn-on pulse width	1	—	ms
Fmax	Maximum operating frequency	—	500	Hz
Fmax Prot.	Maximum frequency with protections activated	—	200	

1) Limited by junction temperature. Pulsed current is also limited by wiring

2) <500 Ohm or shorting Ifb to gnd may damage the part with Ids around 120A

3) >5000 Ohm or leaving Ifb open will shutdown the part. No current will flow in the load.

Protection Characteristics

$T_j = 25^\circ\text{C}$ (unless otherwise specified), $R_{Ifb} = 500$ to $5\text{k}\Omega$.

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$V_{Ifb} - V_{in}$ @ I_{sd}	Over-current shutdown threshold	4	4.5	5.4	V	
T_{sd}	Over-temp. shutdown threshold	—	165	—	°C	see Fig. 7
T_{reset}	Protection reset time	—	50	300	μs	see Fig. 7
OV	Over voltage shutdown (not latched)	30	33	37	V	
$I_{sd__1k}$	Fixed over current shutdown	100	120	140	A	$V_{Ifb} < V_{in}$
I_{sd_1k}	Adjustable over current shutdown 1K	30	40	50	A	$R_{Ifb}=1\text{k}\Omega$
$Min.\text{Pulse}$	Minimum pulse width (no WAIT state)	200	500	1200	μs	see Fig. 6
$WAIT$	WAIT function timer	0.5	1.2	3.5	ms	see Figs. 6 and 7
$Rev.R_{ds__on}$	$R_{ds(on)}$ reverse battery protection	4	6.2	10	mΩ	$V_{cc}-V_{in}=-12\text{V}$, $R_{load}=0.5\Omega$

Static Electrical Characteristics

($T_j = 25^\circ\text{C}$, $V_{cc} = 14\text{V}$ unless otherwise specified.)

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
I_q	Total quiescent current ($I_{out} + I_{fb}$)	—	22	50	μA	$V_{cc}-V_{in}=0$, $V_{cc}-V_{out}=12\text{V}$ $V_{cc}-V_{Ifb}=12\text{V}$
I_{in}	Input current	2	4	8	mA	$V_{cc}-V_{in}=14\text{V}$
V_{ih}	High level input threshold voltage (4)	—	5	5.5	V	
V_{il}	Low level input threshold voltage (4)	3.5	4	—		
V_{hys}	Input hysteresis = $V_{ih}-V_{il}$	0.4	1	1.5		
$I_{out__qs}$	Output quiescent current	—	9	15	μA	$V_{cc}-V_{in}=0$; $V_{cc}-V_{Ifb}=0$; $V_{cc}-V_{out}=12\text{V}$
$R_{ds1__on}$	ON state resistance (5)	4	5.5	7	mΩ	$I_{out}=30\text{A}$, $V_{cc}-V_{in}=14\text{V}$
$R_{ds2__on}$	ON state resistance (5)	4	5.7	10		$I_{out}=17\text{A}$, $V_{cc}-V_{in}=6\text{V}$
$R_{ds3__on}$	ON state resistance (5)	7	12	15		$I_{out}=30\text{A}$, $T_j = 150^\circ\text{C}$
V_{clamp1}	V_{cc} to V_{out} active clamp voltage	30	35	—	V	$I_{out} = 10\text{mA}$
V_{clamp2}	V_{cc} to V_{out} active clamp voltage	—	36	40		$I_{out}=30\text{A}, V_{cc}-V_{Ifb}<20\text{V}$
V_{sd}	Body diode forward voltage	—	0.85	1		$I_{out}=30\text{A}$
$V_{aval.}$	V_{cc} to V_{out} avalanche voltage	40	43	50		$I_{out}=30\text{A}, V_{cc}-V_{Ifb}>35\text{V}$

Switching Electrical Characteristics

$V_{cc} = 14\text{V}$, Resistive Load = 0.4Ω , $T_j = 25^\circ\text{C}$, (unless otherwise specified).


Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
T_{don}	Turn-on delay time to $V_{cc}-V_{out}=0.9\text{V}_{cc}$	1	8	30	μs	see figure 2
T_{r1}	Rise time to $V_{cc}-V_{out}=5\text{V}$	0.4	2	10		
T_{r2}	Rise time to $V_{cc}-V_{out}=0.1\text{V}_{cc}$	10	30	100		
E_{on}	Turn ON energy	—	3	6	mJ	see figure 3
T_{doff}	Turn-off delay to $V_{cc}-V_{out}=0.1\text{V}_{cc}$	10	30	100		
T_f	Fall time to $V_{cc}-V_{out}=0.9\text{V}_{cc}$	—	15	—	μs	see figure 3
E_{off}	Turn OFF energy	—	2	4	mJ	

4) Input threshold are measured directly between the input pin and the tab. Any parasitic resistance in common between the load current path and the input signal path can significantly affect the thresholds.

5) $R_{ds(on)}$ is measured between the Tab and the Out pin, 5mm away from the package.

Current Sense Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
Ratio	I load / I _{fb} current ratio	7,500	8,800	10,000	—	T _j = 25°C , R _{fb} = 300Ω, I = 60A
Ratio_TC	I _{load} /I _{fb} variation over temperature	-5	0	+5	%	T _j = 40 To +150°C
offset	Load current diagnostic offset	-1.3	0	+1.3	A	I = 2A
Trst	I _{fb} response time (low signal)	—	5	15	μs	90% of the I load step

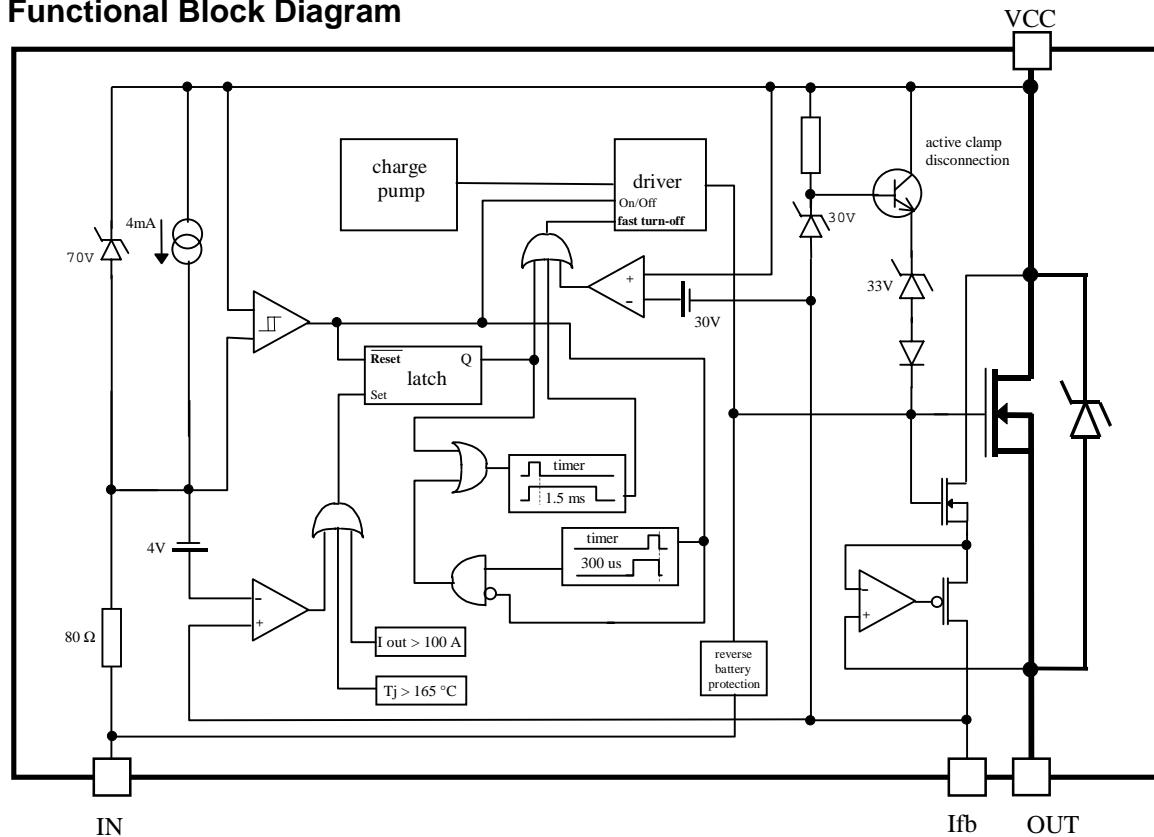Functional Block Diagram

Lead Assignments

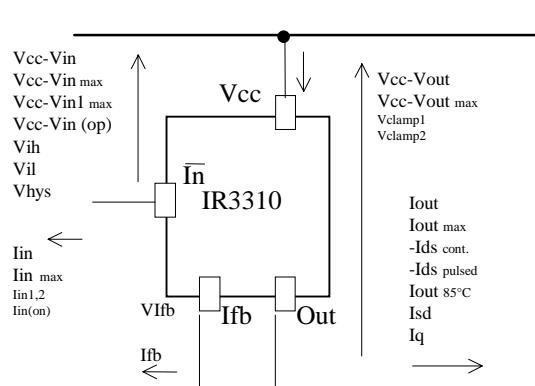
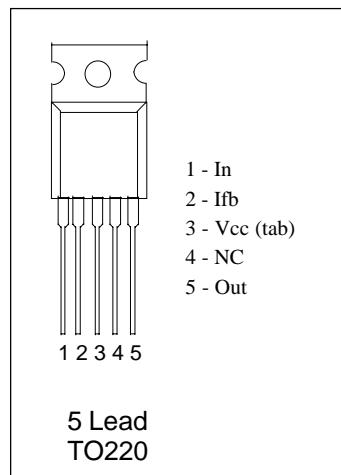


Figure 1 - Voltages and currents definitions

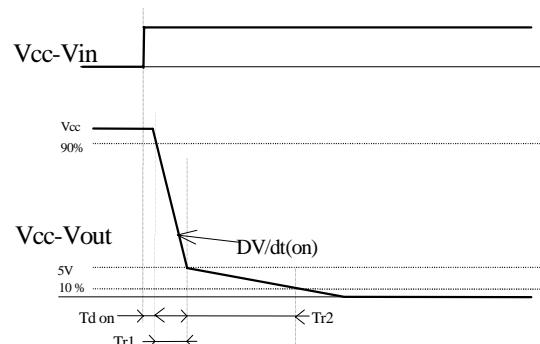


Figure 2 - Switching time definitions (turn-on)

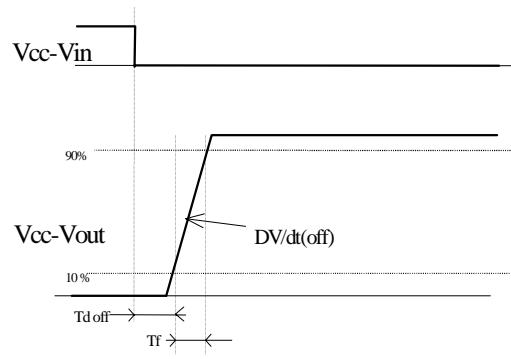


Figure 3 - Switching time definitions (turn-off)


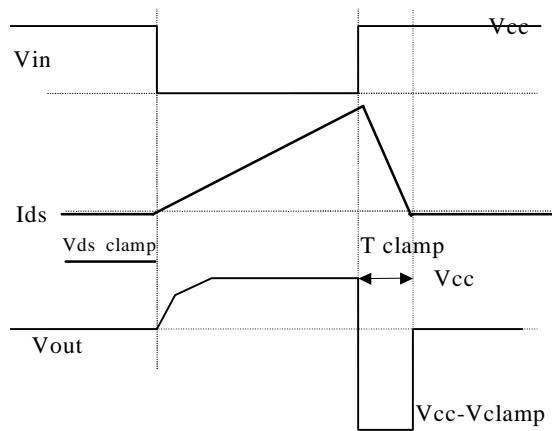


Figure 4 - Active clamp waveforms

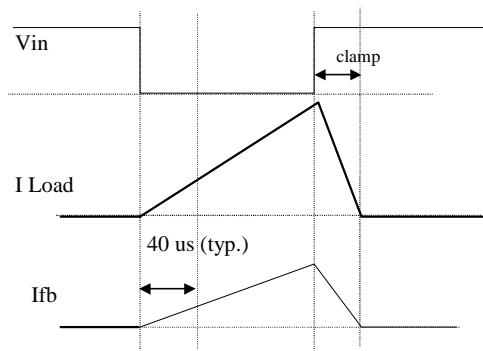

Precise measurement

Figure 5 - Current sense precision:
Accurate measurement only when the power Mosfet is fully ON

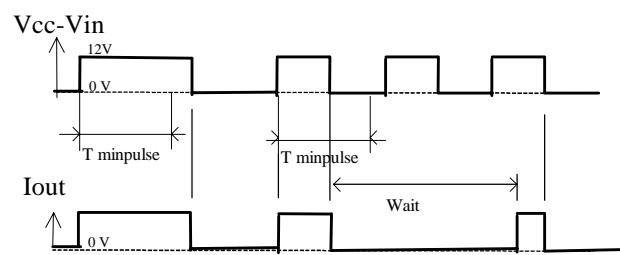


Figure 6 - Minimum pulse & WAIT function

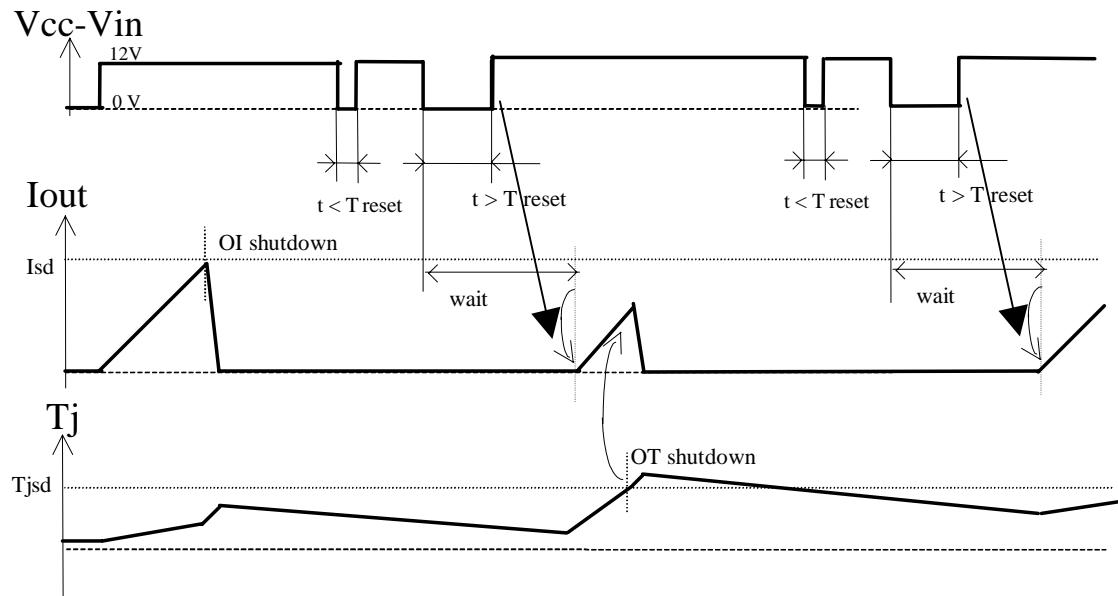


Figure 7 - Protection Timing Diagrams

All curves are typical characteristics. Operation in hatched areas is not recommended. $T_j=25^\circ\text{C}$, $R_{lfb}=500 \Omega\text{m}$, $V_{cc}=14\text{V}$ (unless otherwise specified).

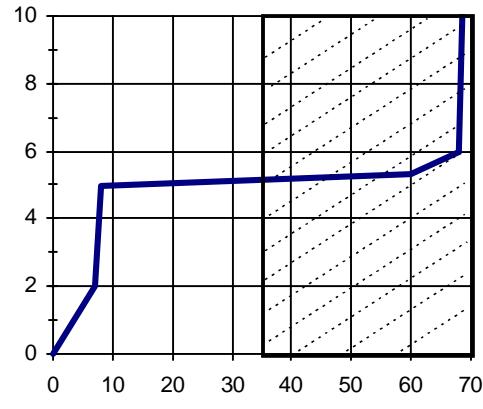


Figure 8 - I_{cc} (mA) vs V_{cc-Vin} (V)

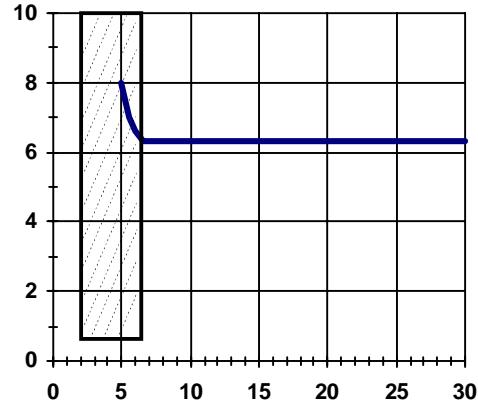


Figure 9- R_{dson} ($\text{m}\Omega$) vs V_{cc-Vin} (V)

IR3310

International
IR Rectifier

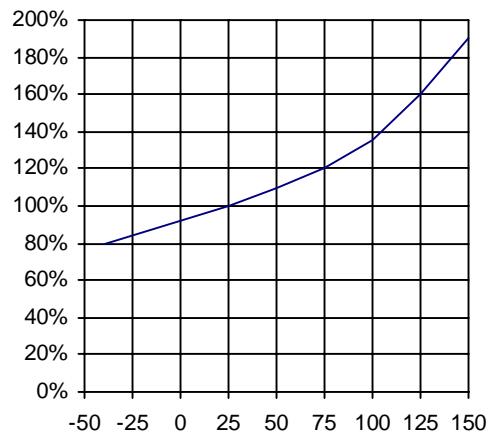


Figure 10 -Normalized Rdson (%) vs T_j (°C)

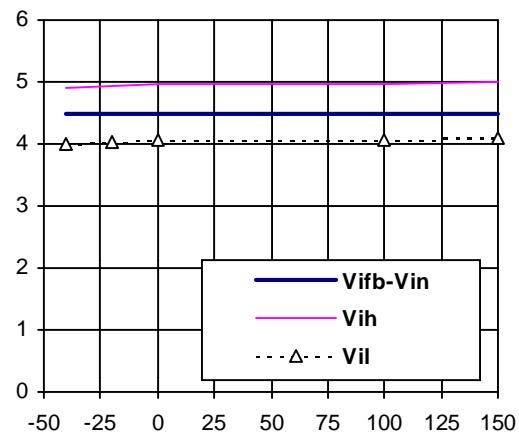


Figure 11 - Vi_h, Vi_l & Vifb -Vin (V) vs T_j (°C)

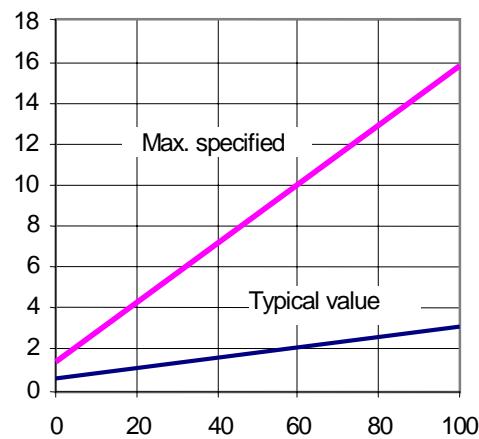


Figure 12 - Error (+/-A) vs Iload (A)

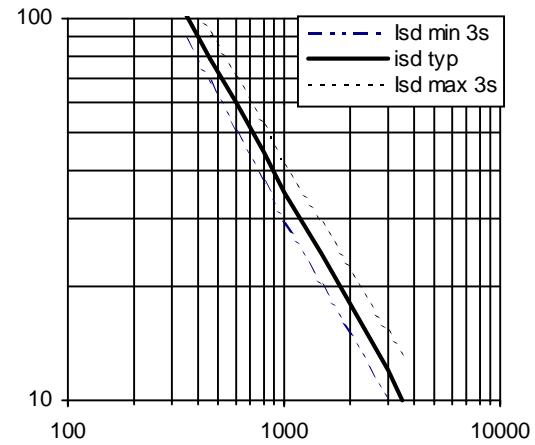


Figure 13 - Isd (A) vs RIfb (Ohm)

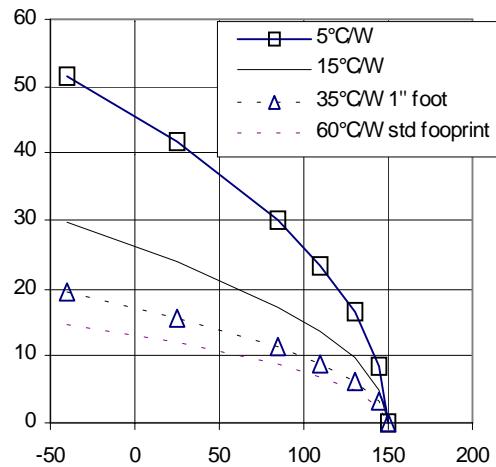


Figure 14 - Max. DC current (A) vs Temp. (°C)

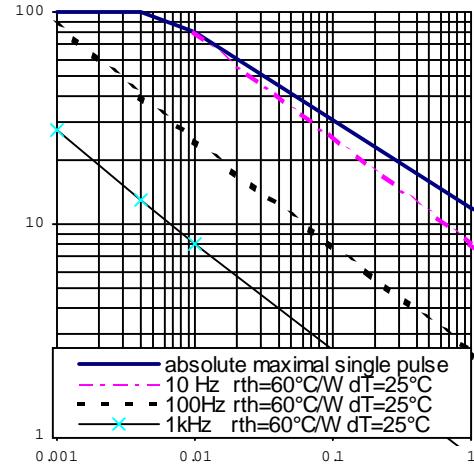


Figure 15 - Max. I (A) vs inductance (mH)

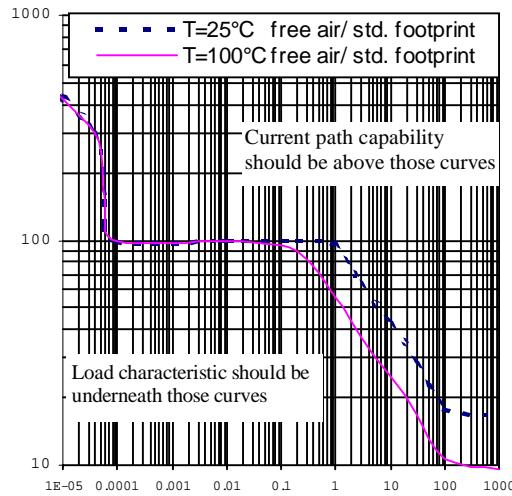


Figure 16 - I out (A) vs Protection resp. Time (s)


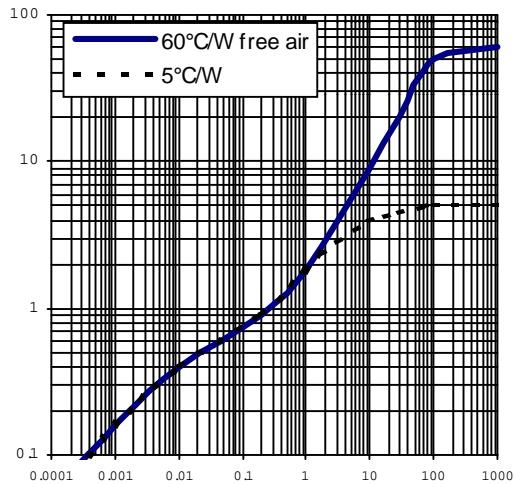


Figure 17 - Rth (°C/W) vs Time (s)

IR3310

International
IR Rectifier

Case Outline - TO220 (5 lead)

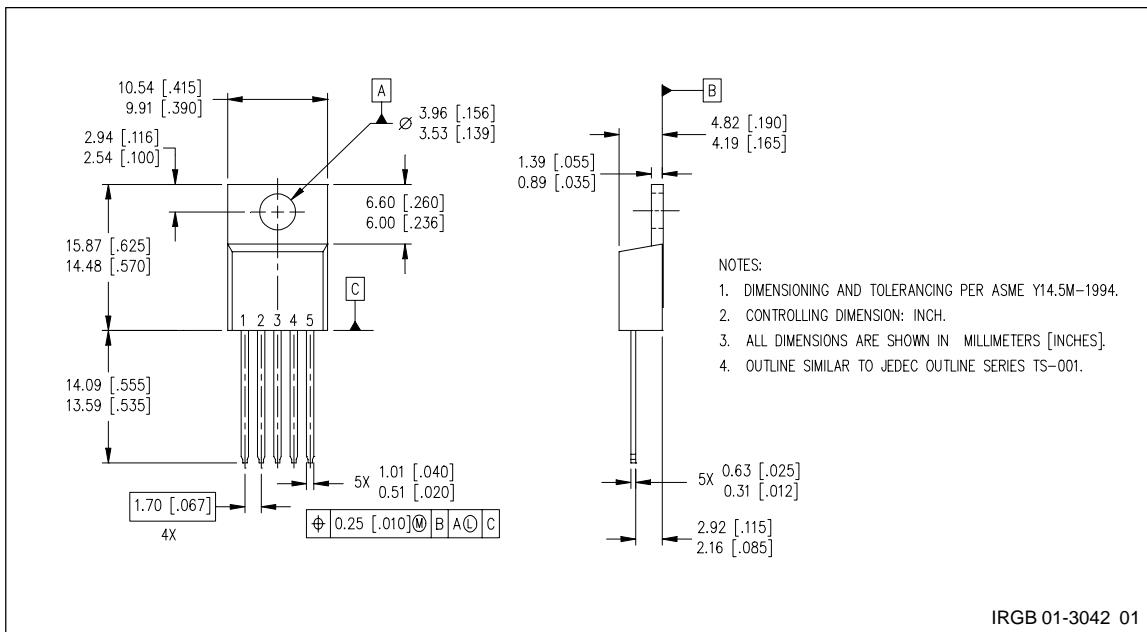

IRGB 01-3042 01

International
ICR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105
Data and specifications subject to change without notice. 4/3/2003