

NTSC-M/PAL CONVERTOR


■ GENERAL DESCRIPTION

The NJM2218 is a signal processing IC for M/PAL Video signal.

It is possible to convert from NTSC signal to M/PAL signal.

The NJM2218 has functions of Video Sub-Carrier Doubler Block, Synchronous Signal AFC Block, Logic Block, Convert Block and Video Switch Block.

■ PACKAGE OUTLINE



NJM2218D

■ FEATURES

- 1chip NTSC-M/PAL convertor
- Internal AFC block
- Package Outline DIP18
- Operating Voltage (+4.5V~5.5V)
- Bipolar Technology


■ RECOMMENDED OPERATING CONDITION

- Operating Voltage: $V^+ = +4.5V \sim +5.5V$

■ APPLICATION

- TV, VCR


■ PIN CONFIGURATION

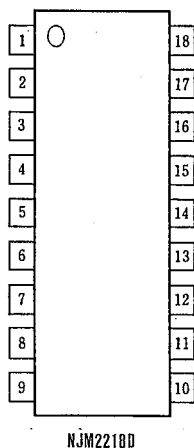

NJM2218D

- | | |
|-----------------------|----------------------------|
| 1)fsc Input | 10)Switch 1 |
| 2)VCO Control | 11)45deg Phase Shift Input |
| 3)COMP. SYNC Input | 12)NTSC Chroma Input |
| 4)VCO Filter | 13)M/PAL Output |
| 5)Phase Detect Filter | 14)Switch 2 Input |
| 6)V ⁺ | 15)Convert/Through Output |
| 7)Mono Multi C/R(1) | 16)Convert/Through Input |
| 8)Mono Multi C/R(2) | 17)BPF Output |
| 9)GND | 18)2fsc Output |

■ BLOCK DIAGRAM

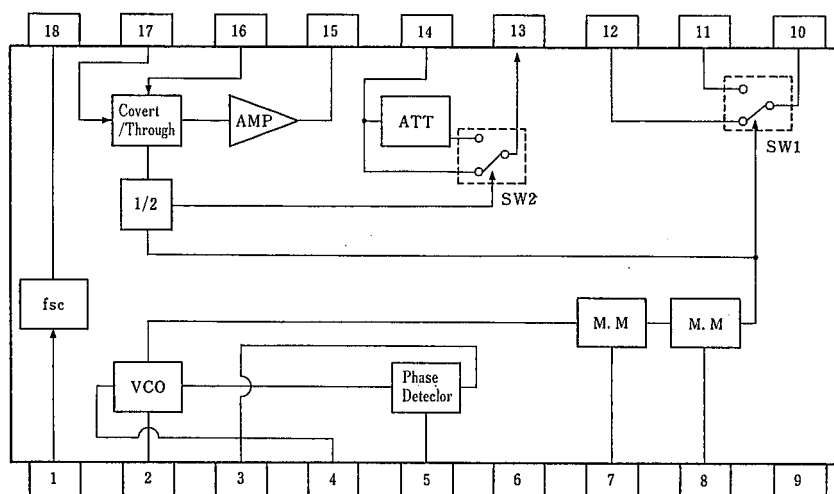

NJM2218

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	+10	V
Power Dissipation	P _D	700	mW
Operating Temperature Range	T _{opr}	-20~+75	°C
Storage Temperature Range	T _{stg}	-40~+125	°C


■ ELECTRICAL CHARACTERISTICS


(V⁺=50V, Ta=25°C)

PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Current		I _{cc}	—	20	28	mA
Signal Doubler Gain		G _{2fsc}	−1.4	+0.6	+2.6	dB
AFC Characteristic	Free-Run Frequency	f _{fl}	18.0	20.0	—	kHz
		f _{fl}	—	11.0	18.5	kHz
	Lock Range	Δf _l	3.0	5.0	—	kHz
	Capture Range	Δf _c	0.8	1.3	—	kHz
Mono Multi Characteristic	Pulse Deley Time	P _{dt}	−0.7	3.0	13.0	μs
	Pulse Wide (1)	P _{w1}	7.0	9.0	11.0	μs
	Pulse Wide (2)	P _{w2}	8.0	10.0	12.0	μs
M/PAL Convert Characteristic	Offset Voltage	Δv	0	20	80	mV
	Gain Difference	ΔG	2.0	5.0	8.0	dB
	M/PAL Convert Gain	V	−3.0	−1.0	1.0	dB
SyncThreshold Level		V _{S-TH}	0.7	1.4	2.0	V

5

■ APPLICATION

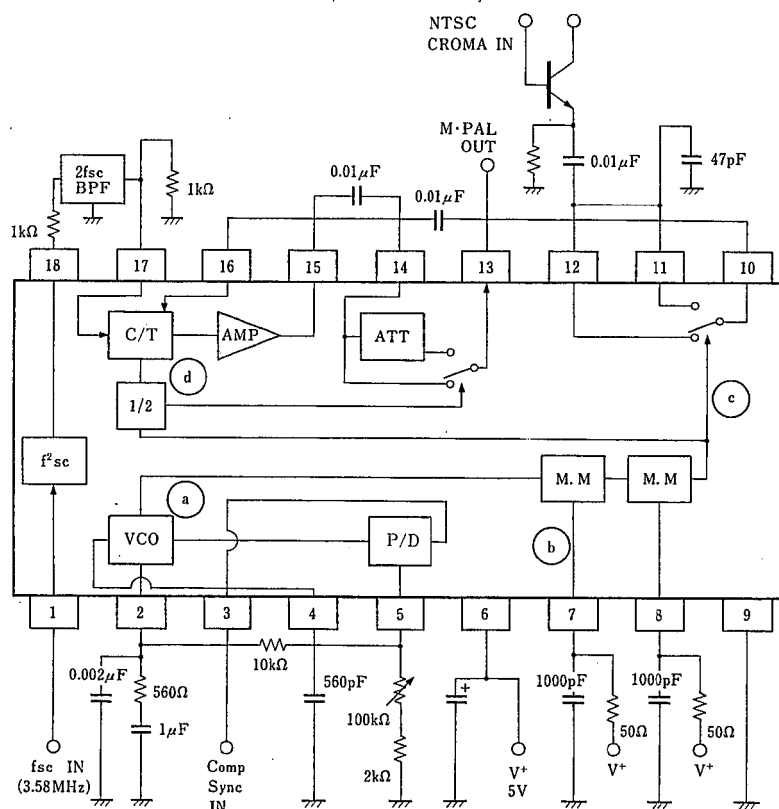

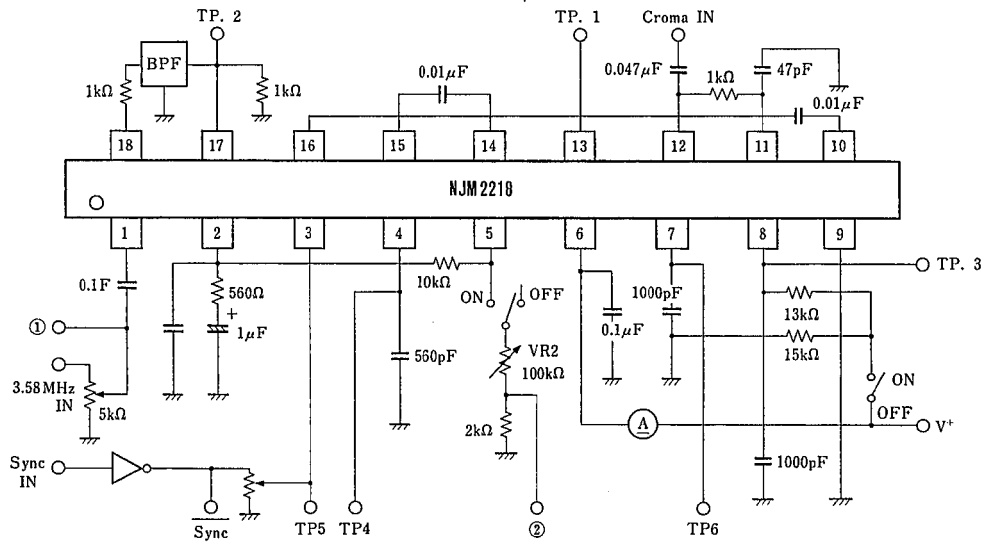

NJM2218

■ BLOCK EXPLANATION


• AFC, M/M BLOCK

3 Pin input is Positive Composite Sync Signal

2, 4, 5 Pins' external circuit can lock both oscillation of 15.75kHz and sync signal.

Internal temperature coefficient is 0ppm, so please use low drift external parts, especially the condensor (560pF) of 4Pin should be 0ppm/°C

■ TIMING CHART

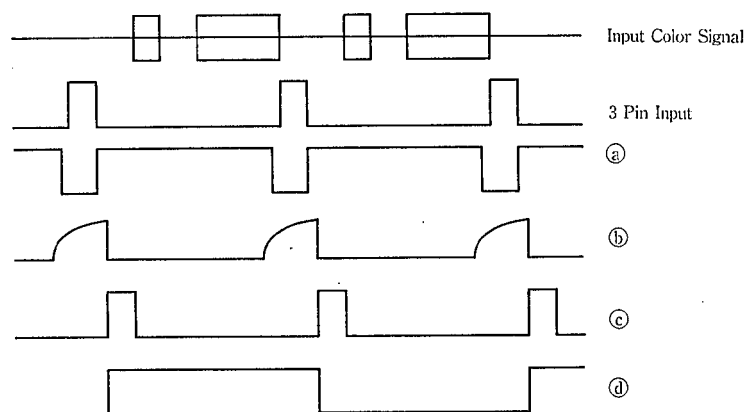

5

• SIGNAL DOUBLER BLOCK

3.58 (fsc)×2=7.16MHz generator

1 Pin: 100~200mVp-p input pin

18 Pin: about +0.6dB (GAIN) output pin

• SW1 BLOCK

12 Pin: NTSC COLOR SIGNAL (100~200mVp-p) input pin

10 Pin: 45deg Phase shift Color Burst Signal output pin

• CONVERT/THROUGH, AMPLIFIER, ATT, SW2 BLOCK

16 Pin: NTSC Color Signal (Phase Shift Color Burst) input pin

17 Pin: 7.16MHz (fsc×2) input pin

M/PAL Signal is output from 13 Pin through the Amplifier and ATT Block.

NJM2218

MEMO

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.