

# signetics


**EXPANDABLE 4-INPUT  
AND-OR-INVERT GATES**

S54H55-A,F,W • N74H55-A,F

**S54H55  
N74H55**

**DIGITAL 54/74 TTL SERIES**


**SCHEMATIC DIAGRAM**

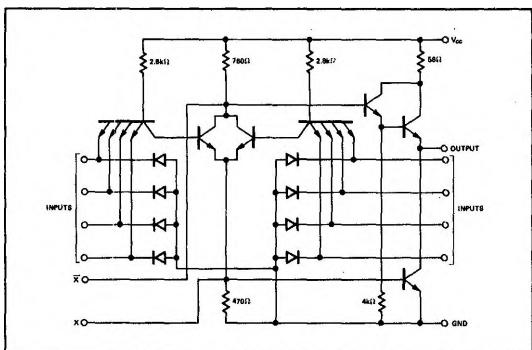

**NOTES:**

1. Component values shown are nominal.
2. Both expander inputs are used simultaneously for expanding.
3. If expander is not used, leave X and X pins open.
4. A total of four S54H60/N74H60 expander gates or one S54H62/N74H62 expander gate may be connected to the expander inputs.

**PIN CONFIGURATIONS**

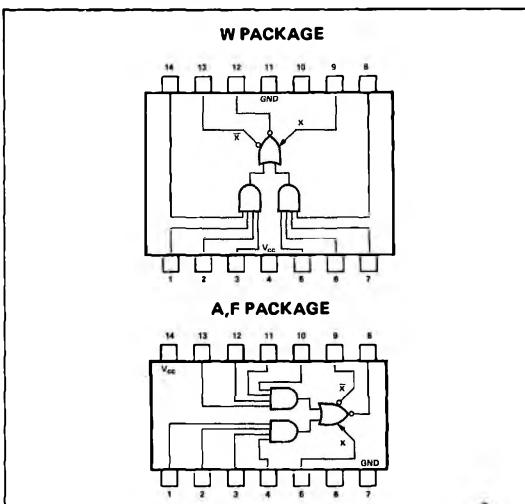

**RECOMMENDED OPERATING CONDITIONS**

		MIN	NOM	MAX	UNIT
Supply Voltage $V_{CC}$ :	S54H55 Circuits	4.5	5	5.5	V
	N74H55 Circuits	4.75	5	5.25	V
Normalized Fan-Out from each Output, N				10	
Operating Free-Air Temperature Range, $T_A$ :	S54H55 Circuits	-55	25	125	°C
	N74H55 Circuits	0	25	70	°C

**ELECTRICAL CHARACTERISTICS** (over recommended operating free-air temperature range unless otherwise noted)

PARAMETER	TEST CONDITIONS*	TEST CONDITIONS*			UNIT
		MIN	TYP†	MAX	
$V_{in(1)}$	Logical 1 input voltage required at all input terminals of either AND section to ensure logical 0 at output	$V_{CC} = \text{MIN}$		2	V
$V_{in(0)}$	Logical 0 input voltage required at one input terminal of each AND section to ensure logical 1 at output	$V_{CC} = \text{MIN}$		0.8	V
$V_{out(1)}$	Logical 1 output voltage	$V_{CC} = \text{MIN}$ , $I_{load} = -500\mu\text{A}$	$V_{in} = 0.8\text{V}$ ,	2.4	V
$V_{out(0)}$	Logical 0 output voltage	$V_{CC} = \text{MIN}$ , $I_{sink} = 20\text{mA}$	$V_{in} = 2\text{V}$ ,	0.4	V
$I_{in(0)}$	Logical 0 level input current (each input)	$V_{CC} = \text{MAX}$ ,	$V_{in} = 0.4\text{V}$	-2	mA
$I_{in(1)}$	Logical 1 level input current (each input)	$V_{CC} = \text{MAX}$ , $V_{CC} = \text{MAX}$ ,	$V_{in} = 2.4\text{V}$ , $V_{in} = 5.5\text{V}$	50 1	$\mu\text{A}$ mA
$I_{OS}$	Short circuit output current**	$V_{CC} = \text{MAX}$ ,		-40	-100
$I_{CC(0)}$	Logical 0 level supply current	$V_{CC} = \text{MAX}$ ,	$V_{in} = 4.5\text{V}$	7.5	12
$I_{CC(1)}$	Logical 1 level supply current	$V_{CC} = \text{MAX}$ ,	$V_{in} = 0$	4.5	6.4

# DIGITAL 54/74 TTL SERIES ■ S54H55, N74H55

## ELECTRICAL CHARACTERISTICS (S54H55 circuits only) using expander inputs, $V_{CC} = 4.5V$ , $T_A = -55^{\circ}C$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{inX}$	$V_X = 1.4V$			-5.85	mA
$V_{BE(Q)}$	$I_{sink} = 20mA$ , $I_1 = 700\mu A$ , $R_1 = 0$			1	V
$V_{out(1)}$	$I_{load} = -500\mu A$ , $I_2 = -320\mu A$	2.4			V
$V_{out(0)}$	$I_{sink} = 20mA$ , $I_1 = 470\mu A$ , $R_1 = 68\Omega$			0.4	V

## ELECTRICAL CHARACTERISTICS (N74H55 circuits only) using expander inputs, $V_{CC} = 4.75V$ , $T_A = 0^{\circ}C$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{inX}$	$V_X = 1.4V$			-6.3	mA
$V_{BE(Q)}$	$I_{sink} = 20mA$ , $I_1 = 1.1mA$ , $R_1 = 0$			1	V
$V_{out(1)}$	$I_{load} = -500\mu A$ , $I_2 = -570\mu A$	2.4			V
$V_{out(0)}$	$I_{sink} = 20mA$ , $I_1 = 600\mu A$ , $R_1 = 63\Omega$			0.4	V

## SWITCHING CHARACTERISTICS, $V_{CC} = 5V$ , $T_A = 25^{\circ}C$ , $N = 10$ , expander pins are open

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{pd0}$	$C_L = 25pF$ , $R_L = 280\Omega$		6.5	11	ns
$t_{pd1}$	$C_L = 25pF$ , $R_L = 280\Omega$		7	11	ns

## SWITCHING CHARACTERISTICS, $V_{CC} = 5V$ , $T_A = 25^{\circ}C$ , $N = 10$ , $C_X = 15pF$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{pd0}$	$C_L = 25pF$ , $R_L = 280\Omega$		7.7		ns
$t_{pd1}$	$C_L = 25pF$ , $R_L = 280\Omega$		11.4		ns

\* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type. Expander pins are open.

\*\* Duration of short circuit test should not exceed 1 second.

† All typical values are at  $V_{CC} = 5V$ ,  $T_A = 25^{\circ}C$ .