

MONAURAL MIC AMP. for VIDEO CAMERA

■ GENERAL DESCRIPTION

NJM2110 is a monaural microphone amplifier for video camera. It can operate from 2.7V.

The performance is low Operating current and small package, therefore it is easy to design the downsizing and low consumption.

■ PACKAGE OUTLINE



NJM2110M

NJM2110V


■ FEATURES

- Operating Voltage 2.7V~5.3V
- Low Operating Current ($V^+=5V:3.5mA$ Typ.)
($V^+=3.3V:1.1mA$ Typ.)
- Short Circuit Protection for External MIC.
- Package Outline DMP8, SSOP8
- Bipolar Technology

■ APPLICATION


- Video Camera

■ PIN CONFIGURATION

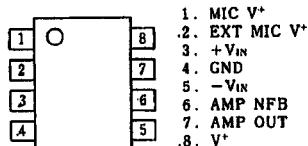NJM2110M
NJM2110V

5

■ BLOCK DIAGRAM

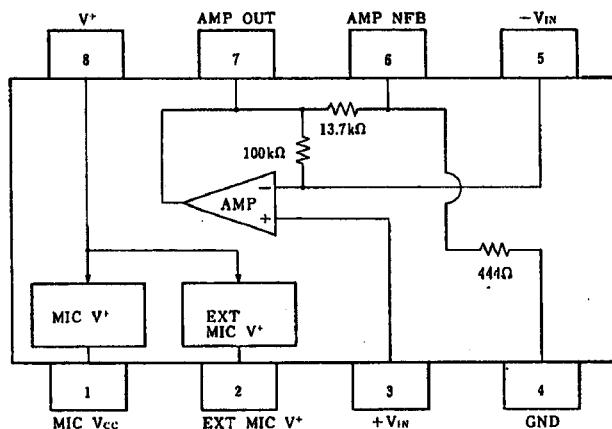

NJM2110

■ ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|------------------|---------------------------|------|
| Supply Voltage | V ⁺ | 7.0 | V |
| Power Dissipation | P _D | (SSOP8) 250 (DMP8) 300 | mW |
| Operating Temperature Range | T _{opr} | -20~+75 | °C |
| Storage Temperature Range | T _{stg} | -40~+125 | °C |


■ ELECTRICAL CHARACTERISTICS

(V⁺=5V, Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------|--------------------|---|------|------|------|-------------------|
| Operating Current 1 | I _{CC} 1 | | — | 3.5 | 4.5 | mA |
| Operating Current 2 | I _{CC} 2 | V ⁻ =3.3V | — | 1.1 | 2.0 | mA |
| Transfer Gain | G _V | f=1kHz | 27 | 28 | 29 | dB |
| Total Harmonic Distortion | THD | f=1kHz, V _O =300mV _{rms} , R _L =10kΩ | — | 0.05 | 0.2 | % |
| Maximum Output Voltage | V _{om} | f=1kHz, V ⁺ =2.7V, THD=1%, R _L =10kΩ | 2.0 | 2.5 | — | V _{p-p} |
| Output Noise Voltage | V _{no} | R _E =1kΩ, C=0.1μF, A-Weight | — | 30 | 42 | μV _{rms} |
| Input Resistance Gain | Z _{in} | f=1kHz | — | 110 | — | kΩ |
| Output Resistance | Z _o | f=1kHz | — | 10 | — | Ω |
| MIC Output Supply Voltage 1 | MIC _O 1 | | 2.0 | 2.35 | 2.7 | V |
| MIC Output Supply Voltage 2 | MIC _O 2 | V ⁺ =2.7V | 2.0 | 2.25 | 2.5 | V |
| External Output Supply Voltage | EXT _{out} | I _O =25mA | 4.0 | — | — | V |
| Output Short Circuit Current | I _{os} | EXT _O =0V | — | — | 30 | mA |

5

■ TEST CIRCUIT

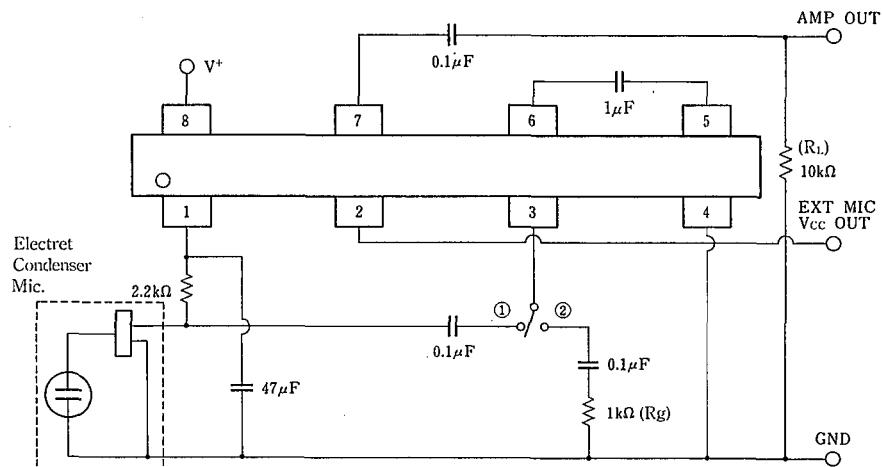

※SW②:Output Noise Voltage TEST

MEMO

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.