



UNI-AND BIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

- HIGH SURGE CAPABILITY :
1.5 kW / 1 ms EXPO
- VERY FAST CLAMPING TIME :
1 ps FOR UNIDIRECTIONAL TYPES
5 ns FOR BIDIRECTIONAL TYPES
- LARGE VOLTAGE RANGE :
5.8 V → 376 V
- ORDER CODE :
TYPE NUMBER FOR UNIDIRECTIONAL
TYPES, TYPE NUMBER + SUFFIX C FOR
BIDIRECTIONAL TYPES



DESCRIPTION

Transient voltage suppressor diodes especially useful in protecting integrated circuits, MOS, hybrids and other voltage-sensitive semiconductors and components.


ABSOLUTE RATINGS (limiting values)

| Symbol | Parameter | Value | Unit |
|--------------------|--|--------------------|----------|
| P_p | Peak Pulse Power for 1 ms Exponential Pulse T_j Initial = 25 °C See note 1 | 1.5 | kW |
| P | Power Dissipation on Infinite Heatsink $T_{amb} = 75$ °C | 5 | W |
| I_{FSM} | Non Repetitive Surge Peak Forward Current for Unidirectional Types T_j Initial = 25 °C $t = 10$ ms | 250 | A |
| T_{stg} T_j | Storage and Operating Junction Temperature Range | - 65 to 175 175 | °C °C |
| T_L | Maximum Lead Temperature for Soldering During 10 s at 4 mm from Case | 230 | °C |

THERMAL RESISTANCE

| Symbol | Parameter | Value | Unit |
|---------------|--|-------|------|
| $R_{th(j-l)}$ | Junction-leads on Infinite Heatsink for $L_{lead} = 10$ mm | 20 | °C/W |

Note : 1. For surges upper than the maximum values, the diode will present a short-circuit anode-cathode.

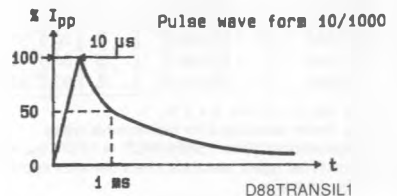

ELECTRICAL CHARACTERISTICS (T_j = 25 °C)

| Symbol | Parameter | Value | |
|-----------------------|--|----------------------|-----------|
| V _{RM} | Stand-off Voltage | See tables | |
| V _(BR) | Breakdown Voltage | | |
| V _(CL) | Clamping Voltage | | |
| I _{PP} | Peak Pulse Current | | |
| α _T | Temperature Coefficient of V _(BR) | | |
| C | Capacitance | | |
| t _{clamping} | Clamping Time (0 volt to V _(BR)) | Unidirectional Types | 1 ps max. |
| | | Bidirectional Types | 5 ns max. |

| Types | | I _{RM} @ V _{RM} max. | | V _(BR) * @ | | | I _R | V _(CL) @ I _{PP} max. | | V _(CL) @ I _{PP} max. | | α _T max. | C** typ. V _R =0 f=1 MHz |
|----------------|---------------|--|------|-----------------------|------|------|----------------|--|------|--|-----|------------------------|------------------------------------|
| Unidirectional | Bidirectional | (μA) | (V) | min. | nom. | max. | (mA) | (V) | (A) | (V) | (A) | (10 ⁻⁴ /°C) | (pF) |
| P 1.5KE6V8P | P 1.5KE6V8CP | 1000§ | 5.8 | 6.45 | 6.8 | 7.48 | 10 | 10.5 | 143 | 13.4 | 746 | 5.7 | 9500 |
| 1.5KE6V8A | 1.5KE6V8CA | 1000§ | 5.8 | 6.45 | 6.8 | 7.14 | 10 | 10.5 | 143 | 13.4 | 746 | 5.7 | 9500 |
| P 1.5KE7V5P | 1.5KE7V5CP | 500§ | 6.4 | 7.13 | 7.5 | 8.25 | 10 | 11.3 | 132 | 14.5 | 690 | 6.1 | 8500 |
| 1.5KE7V5A | 1.5KE7V5CA | 500§ | 6.4 | 7.13 | 7.5 | 7.88 | 10 | 11.3 | 132 | 14.5 | 690 | 6.1 | 8500 |
| 1.5KE8V2P | 1.5KE8V2CP | 200§ | 7.02 | 7.79 | 8.2 | 9.02 | 10 | 12.1 | 124 | 15.5 | 645 | 6.5 | 8000 |
| 1.5KE8V2A | 1.5KE8V2CA | 200§ | 7.02 | 7.79 | 8.2 | 8.61 | 10 | 12.1 | 124 | 15.5 | 645 | 6.5 | 8000 |
| 1.5KE9V1P | 1.5KE9V1CP | 50§ | 7.78 | 8.65 | 9.1 | 10 | 1 | 13.4 | 112 | 17.1 | 585 | 6.8 | 7500 |
| 1.5KE9V1A | 1.5KE9V1CA | 50§ | 7.78 | 8.65 | 9.1 | 9.55 | 1 | 13.4 | 112 | 17.1 | 585 | 6.8 | 7500 |
| P 1.5KE10P | 1.5KE10CP | 10§ | 8.55 | 9.5 | 10 | 11 | 1 | 14.5 | 103 | 18.6 | 968 | 7.3 | 7000 |
| 1.5KE10A | 1.5KE10CA | 10§ | 8.55 | 9.5 | 10 | 10.5 | 1 | 14.5 | 103 | 18.6 | 968 | 7.3 | 7000 |
| 1.5KE11P | 1.5KE11CP | 5§ | 9.4 | 10.5 | 11 | 12.1 | 1 | 15.6 | 96 | 20.3 | 887 | 7.5 | 6400 |
| 1.5KE11A | 1.5KE11CA | 5§ | 9.4 | 10.5 | 11 | 11.6 | 1 | 15.6 | 96 | 20.3 | 887 | 7.5 | 6400 |
| P 1.5KE12P | P 1.5KE12CP | 5 | 10.2 | 11.4 | 12 | 13.2 | 1 | 16.7 | 90 | 21.7 | 829 | 7.8 | 6000 |
| 1.5KE12A | 1.5KE12CA | 5 | 10.2 | 11.4 | 12 | 12.6 | 1 | 16.7 | 90 | 21.7 | 829 | 7.8 | 6000 |
| P 1.5KE13P | 1.5KE13CP | 5 | 11.1 | 12.4 | 13 | 14.3 | 1 | 18.2 | 82 | 23.6 | 763 | 8.1 | 5500 |
| 1.5KE13A | 1.5KE13CA | 5 | 11.1 | 12.4 | 13 | 13.7 | 1 | 18.2 | 82 | 23.6 | 763 | 8.1 | 5500 |
| 1.5KE15P | 1.5KE15CP | 5 | 12.8 | 14.3 | 15 | 16.5 | 1 | 21.2 | 71 | 27.2 | 662 | 8.4 | 5000 |
| 1.5KE15A | 1.5KE15CA | 5 | 12.8 | 14.3 | 15 | 15.8 | 1 | 21.2 | 71 | 27.2 | 662 | 8.4 | 5000 |
| P 1.5KE16P | 1.5KE16CP | 5 | 13.6 | 15.2 | 16 | 17.6 | 1 | 22.5 | 67 | 28.9 | 623 | 8.6 | 4700 |
| 1.5KE16A | 1.5KE16CA | 5 | 13.6 | 15.2 | 16 | 16.8 | 1 | 22.5 | 67 | 28.9 | 623 | 8.6 | 4700 |
| P 1.5KE18P | P 1.5KE18CP | 5 | 15.3 | 17.1 | 18 | 19.8 | 1 | 25.2 | 59.5 | 32.5 | 554 | 8.8 | 4300 |
| 1.5KE18A | 1.5KE18CA | 5 | 15.3 | 17.1 | 18 | 18.9 | 1 | 25.2 | 59.5 | 32.5 | 554 | 8.8 | 4300 |
| P 1.5KE20P | P 1.5KE20CP | 5 | 17.1 | 19 | 20 | 22 | 1 | 27.7 | 54 | 36.1 | 498 | 9.0 | 4000 |
| 1.5KE20A | 1.5KE20CA | 5 | 17.1 | 19 | 20 | 21 | 1 | 27.7 | 54 | 36.1 | 498 | 9.0 | 4000 |
| P 1.5KE22P | 1.5KE22CP | 5 | 18.8 | 20.9 | 22 | 24.2 | 1 | 30.6 | 49 | 39.3 | 458 | 9.2 | 3700 |
| 1.5KE22A | 1.5KE22CA | 5 | 18.8 | 20.9 | 22 | 23.1 | 1 | 30.6 | 49 | 39.3 | 458 | 9.2 | 3700 |
| 1.5KE24P | 1.5KE24CP | 5 | 20.5 | 22.8 | 24 | 26.4 | 1 | 33.2 | 45 | 42.8 | 421 | 9.4 | 3500 |
| 1.5KE24A | 1.5KE24CA | 5 | 20.5 | 22.8 | 24 | 25.2 | 1 | 33.2 | 45 | 42.8 | 421 | 9.4 | 3500 |
| P 1.5KE27P | 1.5KE27CP | 5 | 23.1 | 25.7 | 27 | 29.7 | 1 | 37.5 | 40 | 48.3 | 373 | 9.6 | 3200 |
| 1.5KE27A | 1.5KE27CA | 5 | 23.1 | 25.7 | 27 | 28.4 | 1 | 37.5 | 40 | 48.3 | 373 | 9.6 | 3200 |
| P 1.5KE30P | P 1.5KE30CP | 5 | 25.6 | 28.5 | 30 | 33 | 1 | 41.5 | 36 | 53.5 | 336 | 9.7 | 2900 |
| 1.5KE30A | 1.5KE30CA | 5 | 25.6 | 28.5 | 30 | 31.5 | 1 | 41.5 | 36 | 53.5 | 336 | 9.7 | 2900 |
| P 1.5KE33P | P 1.5KE33CP | 5 | 28.2 | 31.4 | 33 | 36.3 | 1 | 45.7 | 33 | 59 | 305 | 9.8 | 2700 |
| 1.5KE33A | 1.5KE33CA | 5 | 28.2 | 31.4 | 33 | 34.7 | 1 | 45.7 | 33 | 59 | 305 | 9.8 | 2700 |
| P 1.5KE36P | P 1.5KE36CP | 5 | 30.8 | 34.2 | 36 | 39.6 | 1 | 49.9 | 30 | 64.3 | 280 | 9.9 | 2500 |
| 1.5KE36A | 1.5KE36CA | 5 | 30.8 | 34.2 | 36 | 37.8 | 1 | 49.9 | 30 | 64.3 | 280 | 9.9 | 2500 |
| P 1.5KE39P | P 1.5KE39CP | 5 | 33.3 | 37.1 | 39 | 42.9 | 1 | 53.9 | 28 | 69.7 | 258 | 10.0 | 2400 |

* Pulse test t_p < 50 ms δ < 2 %.

** Divide these values by 2 for bidirectional types.

§ For bidirectional types 1.5KE6V8CP → 11CA, I_{RM} must be double that specified for unidirectional types.

For bidirectional types, electrical characteristics apply in both directions.

P : Preferred device.

| Types | | I _{RM} @ V _{RM} max. | | Ψ _(BR) * @ (V) | | | I _R | V _(CL) @ I _{pp} max. | | V _(CL) @ I _{pp} max. | | α _T max. | C** typ V _R =0 f=1 MHz |
|----------------|---------------|---|------|------------------------------|------|------|----------------|---|------|---|------|------------------------|--|
| Unidirectional | Bidirectional | (μA) | (V) | min. | nom. | max. | (mA) | (V) | (A) | (V) | (A) | (10 ⁻⁴ /°C) | (pF) |
| | 1.5KE39A | 5 | 33.3 | 37.1 | 39 | 41 | 1 | 53.9 | 28 | 69.7 | 258 | 10.0 | 2400 |
| P | 1.5KE43P | 5 | 36.8 | 40.9 | 43 | 47.3 | 1 | 59.3 | 25.3 | 76.8 | 234 | 10.1 | 2200 |
| | 1.5KE43A | 5 | 36.8 | 40.9 | 43 | 45.2 | 1 | 59.3 | 25.3 | 76.8 | 234 | 10.1 | 2200 |
| P | 1.5KE47P | P | 40.2 | 44.7 | 47 | 51.7 | 1 | 64.8 | 23.2 | 84 | 214 | 10.1 | 2050 |
| | 1.5KE47A | 5 | 40.2 | 44.7 | 47 | 49.4 | 1 | 64.8 | 23.2 | 84 | 214 | 10.1 | 2050 |
| P | 1.5KE51P | 5 | 43.6 | 48.5 | 51 | 56.1 | 1 | 70.1 | 21.4 | 91 | 198 | 10.2 | 1950 |
| | 1.5KE51A | 5 | 43.6 | 48.5 | 51 | 53.6 | 1 | 70.1 | 21.4 | 91 | 198 | 10.2 | 1950 |
| | 1.5KE56P | 5 | 47.8 | 53.2 | 56 | 61.6 | 1 | 77 | 19.5 | 100 | 180 | 10.3 | 1800 |
| | 1.5KE56A | 5 | 47.8 | 53.2 | 56 | 58.8 | 1 | 77 | 19.5 | 100 | 180 | 10.3 | 1800 |
| | 1.5KE62P | 5 | 53 | 58.9 | 62 | 68.2 | 1 | 85 | 17.7 | 111 | 162 | 10.4 | 1700 |
| | 1.5KE62A | 5 | 53 | 58.9 | 62 | 65.1 | 1 | 85 | 17.7 | 111 | 162 | 10.4 | 1700 |
| P | 1.5KE68P | P | 58.1 | 64.6 | 68 | 74.8 | 1 | 92 | 16.3 | 121 | 148 | 10.4 | 1550 |
| | 1.5KE68A | 5 | 58.1 | 64.6 | 68 | 71.4 | 1 | 92 | 16.3 | 121 | 148 | 10.4 | 1550 |
| | 1.5KE75P | 5 | 64.1 | 71.3 | 75 | 82.5 | 1 | 103 | 14.6 | 134 | 134 | 10.5 | 1450 |
| | 1.5KE75A | 5 | 64.1 | 71.3 | 75 | 78.8 | 1 | 103 | 14.6 | 134 | 134 | 10.5 | 1450 |
| P | 1.5KE82P | P | 70.1 | 77.9 | 82 | 90.2 | 1 | 113 | 13.3 | 146 | 123 | 10.5 | 1350 |
| | 1.5KE82A | 5 | 70.1 | 77.9 | 82 | 86.1 | 1 | 113 | 13.3 | 146 | 123 | 10.5 | 1350 |
| | 1.5KE91P | 5 | 77.8 | 86.5 | 91 | 100 | 1 | 125 | 12 | 162 | 111 | 10.6 | 1250 |
| | 1.5KE91A | 5 | 77.8 | 86.5 | 91 | 95.5 | 1 | 125 | 12 | 162 | 111 | 10.6 | 1250 |
| | 1.5KE100P | 5 | 85.5 | 95 | 100 | 110 | 1 | 137 | 11 | 178 | 101 | 10.6 | 1150 |
| | 1.5KE100A | 5 | 85.5 | 95 | 100 | 105 | 1 | 137 | 11 | 178 | 101 | 10.6 | 1150 |
| | 1.5KE110P | P | 94 | 105 | 110 | 121 | 1 | 152 | 9.9 | 195 | 92 | 10.7 | 1050 |
| | 1.5KE110A | 5 | 94 | 105 | 110 | 116 | 1 | 152 | 9.9 | 195 | 92 | 10.7 | 1050 |
| | 1.5KE120P | 5 | 102 | 114 | 120 | 132 | 1 | 165 | 9.1 | 212 | 85 | 10.7 | 1000 |
| | 1.5KE120A | 5 | 102 | 114 | 120 | 126 | 1 | 165 | 9.1 | 212 | 85 | 10.7 | 1000 |
| | 1.5KE130P | P | 111 | 124 | 130 | 143 | 1 | 179 | 8.4 | 230 | 78 | 10.7 | 950 |
| | 1.5KE130A | 5 | 111 | 124 | 130 | 137 | 1 | 179 | 8.4 | 230 | 78 | 10.7 | 950 |
| | 1.5KE150P | 5 | 128 | 143 | 150 | 165 | 1 | 207 | 7.2 | 265 | 68 | 10.8 | 850 |
| | 1.5KE150A | 5 | 128 | 143 | 150 | 158 | 1 | 207 | 7.2 | 265 | 68 | 10.8 | 850 |
| | 1.5KE160P | 5 | 136 | 152 | 160 | 176 | 1 | 219 | 6.8 | 282 | 64 | 10.8 | 800 |
| | 1.5KE160A | 5 | 136 | 152 | 160 | 168 | 1 | 219 | 6.8 | 282 | 64 | 10.8 | 800 |
| P | 1.5KE170P | 5 | 145 | 161 | 170 | 187 | 1 | 234 | 6.4 | 301 | 60 | 10.8 | 750 |
| | 1.5KE170A | 5 | 145 | 161 | 170 | 179 | 1 | 234 | 6.4 | 301 | 60 | 10.8 | 750 |
| P | 1.5KE180P | P | 154 | 171 | 180 | 198 | 1 | 246 | 6.1 | 317 | 57 | 10.8 | 725 |
| | 1.5KE180A | 5 | 154 | 171 | 180 | 189 | 1 | 246 | 6.1 | 317 | 57 | 10.8 | 725 |
| P | 1.5KE200P | P | 171 | 190 | 200 | 220 | 1 | 274 | 5.5 | 353 | 51 | 10.8 | 675 |
| | 1.5KE200A | 5 | 171 | 190 | 200 | 210 | 1 | 274 | 5.5 | 353 | 51 | 10.8 | 675 |
| | 1.5KE220P | P | 188 | 209 | 220 | 242 | 1 | 328 | 4.6 | 388 | 46.5 | 10.8 | 625 |
| | 1.5KE220A | 5 | 188 | 209 | 220 | 231 | 1 | 328 | 4.6 | 388 | 46.5 | 10.8 | 625 |
| P | 1.5KE250P | P | 213 | 237 | 250 | 275 | 1 | 344 | 5.0 | 442 | 47 | 11 | 560 |
| | 1.5KE250A | 5 | 213 | 237 | 250 | 263 | 1 | 344 | 5.0 | 442 | 47 | 11 | 560 |
| | 1.5KE280P | 5 | 239 | 266 | 280 | 308 | 1 | 384 | 5.0 | 494 | 47 | 11 | 520 |
| | 1.5KE280A | 5 | 239 | 266 | 280 | 294 | 1 | 384 | 5.0 | 494 | 47 | 11 | 520 |
| P | 1.5KE300P | P | 256 | 285 | 300 | 330 | 1 | 414 | 5.0 | 529 | 47 | 11 | 500 |
| | 1.5KE300A | 5 | 256 | 285 | 300 | 315 | 1 | 414 | 5.0 | 529 | 47 | 11 | 500 |
| | 1.5KE320P | 5 | 273 | 304 | 320 | 352 | 1 | 438 | 4.5 | 564 | 42 | 11 | 460 |
| | 1.5KE320A | 5 | 273 | 304 | 320 | 336 | 1 | 438 | 4.5 | 564 | 42 | 11 | 460 |
| P | 1.5KE350P | P | 299 | 332 | 350 | 385 | 1 | 482 | 4.0 | 618 | 37 | 11 | 430 |
| | 1.5KE350A | 5 | 299 | 332 | 350 | 368 | 1 | 482 | 4.0 | 618 | 37 | 11 | 430 |
| P | 1.5KE400P | P | 342 | 380 | 400 | 440 | 1 | 548 | 4.0 | 706 | 37 | 11 | 390 |
| | 1.5KE400A | 5 | 342 | 380 | 400 | 420 | 1 | 548 | 4.0 | 706 | 37 | 11 | 390 |
| P | 1.5KE440P | P | 376 | 418 | 440 | 484 | 1 | 603 | 3.5 | 776 | 33 | 11 | 360 |
| | 1.5KE440A | 5 | 376 | 418 | 440 | 462 | 1 | 603 | 3.5 | 776 | 33 | 11 | 360 |

* Pulse test t_p ≤ 50 ms δ < 2%.

** Divide these values by 2 for bidirectional types

For bidirectional types, electrical characteristics apply in both directions.

P : Preferred device.

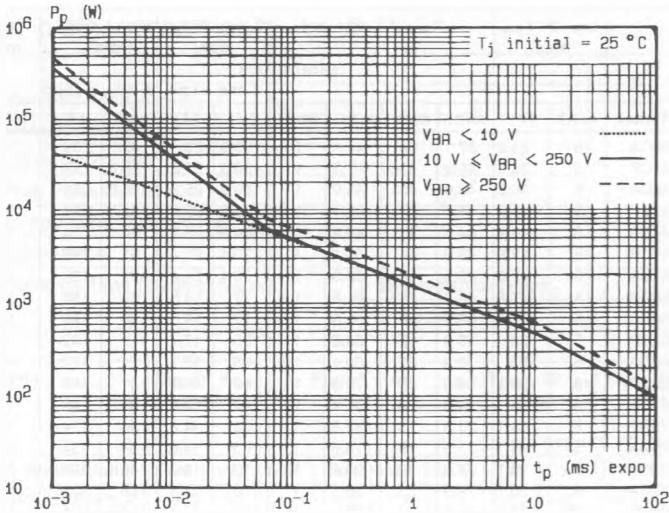


Fig.1 - Peak pulse power versus exponential pulse duration.

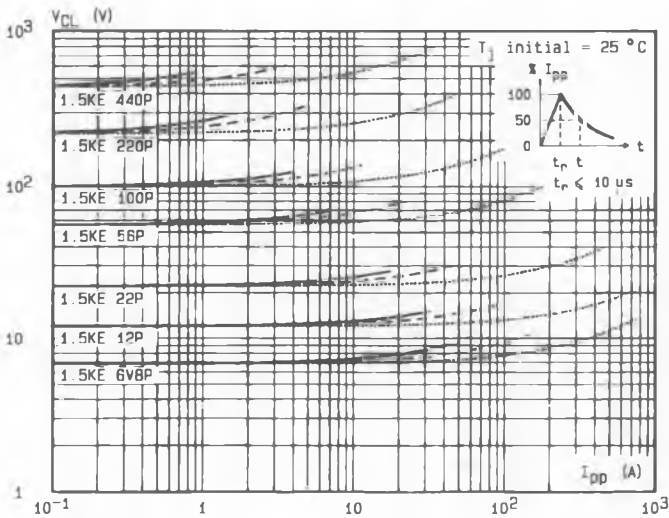


Fig.2 - Clamping voltage versus peak pulse current.
 exponential waveform $t = 20$ μ s
 $t = 1$ ms ----
 $t = 10$ ms ———

Note : The curves of the figure 2 are specified for a junction temperature of 25 °C before surge. The given results may be extrapolated for other junction temperatures by using the following formula : $\Delta V_{(BR)} = K T (V_{(BR)}) \times [T_j - 25] \times V_{(BR)}$
 For intermediate voltages, extrapolate the given results.

D881.5KEP4

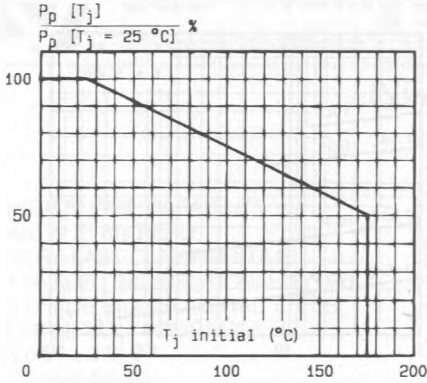


Fig.3 - Allowable power dissipation versus junction temperature.

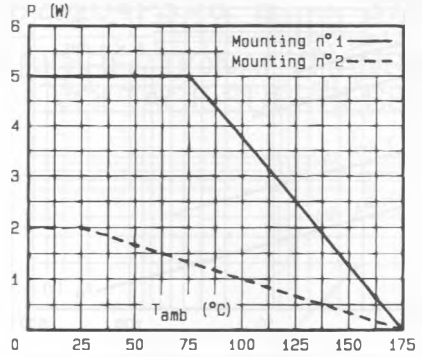


Fig.4 - Power dissipation versus ambient temperature.

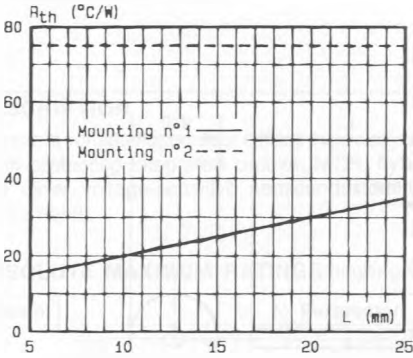


Fig.5 - Thermal resistance versus lead length.

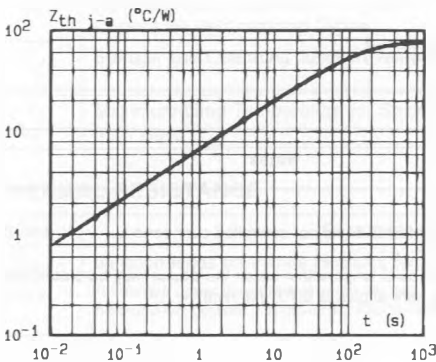
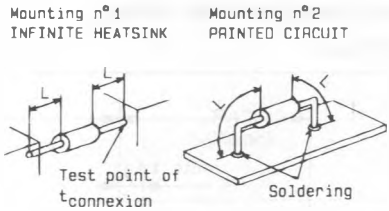


Fig.6 - Transient thermal impedance junction-ambient for mounting n°2 versus pulse duration (L = 10 mm).

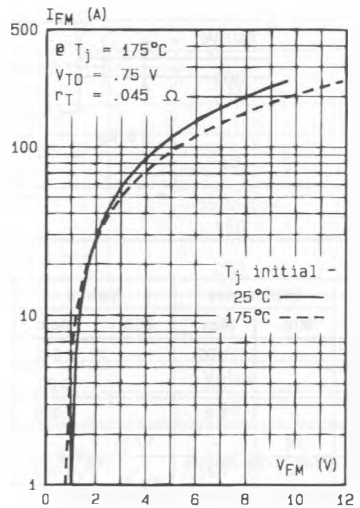


Fig.7 - Peak forward current versus peak forward voltage drop (typical values for unidirectional types).

D881.5KEP5

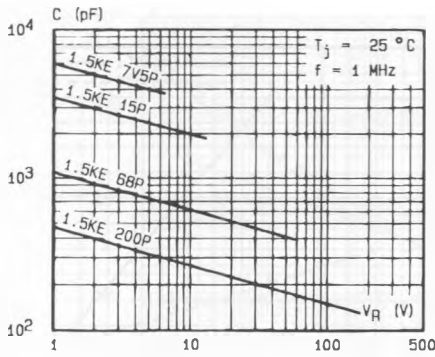


Fig.8a - Capacitance versus reverse applied voltage for unidirectional types (typical values).


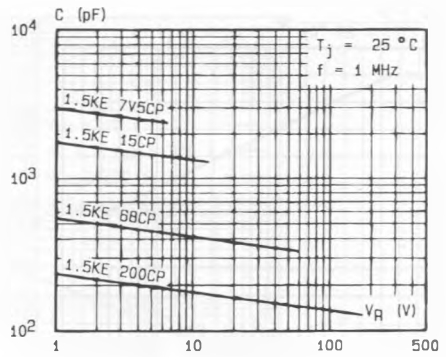


Fig.8b - Capacitance versus reverse applied voltage for bidirectional types (typical values).

D881 5KEP6

PACKAGE MECHANICAL DATA

CB-429 Plastic

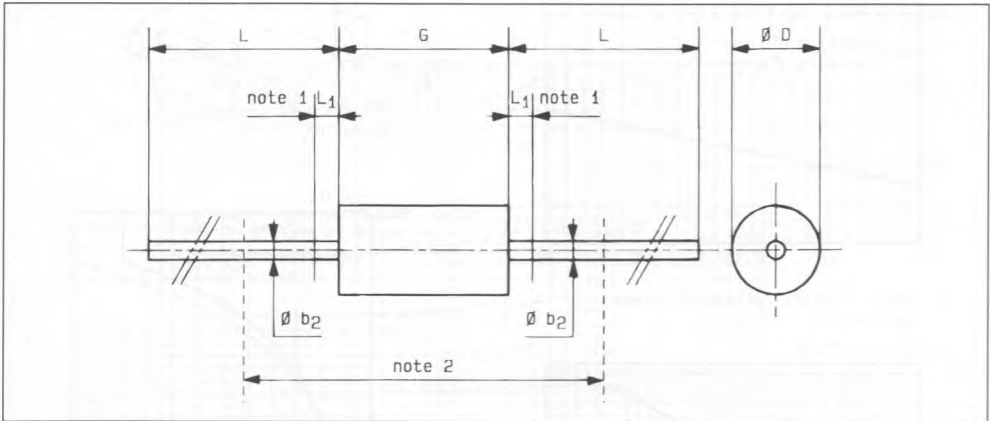

| Ref. | Millimeters | | Inches | | Notes |
|------------------|-------------|------|--------|-------|---|
| | Min. | Max. | Min. | Max. | |
| Ø b ₂ | - | 1.06 | - | 0.042 | 1 - The lead diameter Ø b ₂ is not controlled over zone L ₁ . |
| Ø D | - | 5.1 | - | 0.20 | |
| G | - | 9.8 | - | 0.386 | 2 - The minimum axial length within which the device may be placed with its leads bent at right angles is 0.70" (18 mm) |
| L | 26 | - | 1.024 | - | |
| L ₁ | - | 1.27 | - | 0.050 | |

Cooling method : by convection (method A).
 Marking : type number ; white band indicates cathode for unidirectional types.
 Weight : 0.9 g