

# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
SPRINGFIELD, NEW JERSEY 07081  
U.S.A.

TELEPHONE: (973) 376-2922  
(212) 227-6005  
FAX: (973) 376-8960


## 1N5221A/B THRU 1N5281A/B

0.5W SILICON  
ZENER DIODES

- Standards zener voltage tolerance is  $\pm 20\%$ . Add suffix "A" for  $\pm 10\%$  tolerance and suffix "B" for  $\pm 5\%$  tolerance
- other tolerance, non standards and higher zener voltage upon request

### Mechanical Data

- Case : DO-35 glass case
- Polarity : Color band denotes cathode end
- Weight : Approx. 0.13 gram

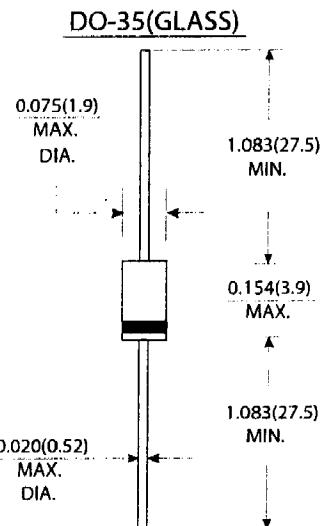

Dimensions in inches and (millimeters)

### Absolute Maximum Ratings (Limiting Values) (TA=25°C)

	Symbols	Value	Units
Zener current see table "Characteristics"			
Power dissipation at TA=75°C	Ptot	500 <sup>1)</sup>	mW
Junction Temperature	TJ	175	°C
Storage Temperature range	TSTG	-65 to +200	°C

1) Valid provided that a distance of 8mm from case are kept at ambient temperature

### Electrical Characteristics (TA=25°C)

	Symbols	Min.	Typ.	Max.	Units
Thermal resistance junction to ambient	R <sub>θ JA</sub>			300 <sup>1)</sup>	°C/W
Forward voltage at IF=200mA	V <sub>F</sub>			1.1	V

1) Valid provided that a distance of 8mm from case are kept at ambient temperature



N.J. Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice.  
Information furnished by N.J. Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However N.J. Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. N.J. Semi-Conductors encourages

Type	Zener Voltage range <sup>1)</sup>		Maximum zener impedance <sup>1)</sup>			Maximum Reverse Leakage Current		Temp Coefficient of zener voltage	
	VZNOM <sup>3)</sup>	IZT	r <sub>Zjt</sub> and r <sub>Zjk</sub> at I <sub>ZK</sub>			I <sub>R</sub> <sup>2)</sup> at V <sub>R</sub>			
			V	mA	Ω	Ω	mA		
1N5250A/B	20	6.2	<25					<-0.086	
1N5251A/B	22	5.6	<29					<-0.087	
1N5252A/B	24	5.2	<33					<-0.088	
1N5253A/B	25	5.0	<35					<-0.089	
1N5254A/B	27	4.6	<41					<-0.090	
1N5255A/B	28	4.5	<44					<-0.091	
1N5256A/B	30	4.2	<49					<-0.091	
1N5257A/B	33	3.8	<58		<700			<-0.092	
1N5258A/B	36	3.4	<70		<700			<+0.093	
1N5259A/B	39	3.2	<80		<800			<+0.094	
1N5260A/B	43	3.0	<93		<900			<+0.095	
1N5261A/B	47	2.7	<105		<1000			<+0.095	
1N5262A/B	51	2.5	<125		<1100			<+0.096	
1N5263A/B	56	2.2	<150		<1300			<+0.096	
1N5264A/B	60	2.1	<170		<1400			<+0.097	
1N5265A/B	62	2.0	<185		<1400			<+0.097	
1N5266A/B	68	1.8	<230		<1600			<+0.097	
1N5267A/B	75	1.7	<270		<1700			<+0.098	
1N5268A/B	82	1.5	<330		<2000			<+0.098	
1N5269A/B	87	1.4	<370		<2200			<+0.099	
1N5270A/B	91	1.4	<400		<2300			<+0.099	
1N5271A/B	100	1.3	<500	--	--			<+0.100	
1N5272A/B	110	1.2	<700	--	--			<+0.100	
1N5273A/B	120	1.0	<950	--	--			<+0.100	
1N5274A/B	130	0.95	<1100	--	--			<+0.110	
1N5275A/B	140	0.90	<1300	--	--			<+0.110	
1N5276A/B	150	0.85	<1500	--	--			<+0.110	
1N5277A/B	160	0.80	<1700	--	--			<+0.115	
1N5278A/B	170	0.74	<1900	--	--			<+0.115	
1N5279A/B	180	0.68	<2200	--	--			<+0.120	
1N5280A/B	190	0.66	<2400	--	--			<+0.120	
1N5281A/B	200	0.65	<2500	--	--			<+0.120	

1) The zener impedance is derived from the 60Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current (IZT or IZK) is superimposed on IZT or IZK. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

2) Valid provided that leads at a distance of 8mm from case are kept at ambient temperature.

3) Measured under thermal equilibrium and DC test conditions.

Type	Zener Voltage range <sup>1)</sup>		Maximum zener impedance <sup>1)</sup>			Maximum Reverse Leakage Current		Temp Coefficient of zener voltage
	VZNOM <sup>3)</sup>	I <sub>ZT</sub>	r <sub>Zjt</sub> and r <sub>Zjk</sub> at I <sub>ZK</sub>			I <sub>R</sub> <sup>2)</sup> at V <sub>R</sub>		
	V	mA	Ω	Ω	mA	μ A	V	%/K
1N5221A/B	2.4	20	<30	<1200	0.25	<100	1.0	<-0.085
1N5222A/B	2.5			<1250		<100		<-0.085
1N5223A/B	2.7			<1300		<75		<-0.080
1N5224A/B	2.8			<1400		<75		<-0.080
1N5225A/B	3.0		<29	<1600		<50		<-0.075
1N5226A/B	3.3		<28	<1600		<25		<-0.070
1N5227A/B	3.6		<24	<1700		<15		<-0.065
1N5228A/B	3.9		<23	<1900		<10		<-0.060
1N5229A/B	4.3		<22	<2000				<+0.055
1N5230A/B	4.7		<19	<1900				2.0 <+0.030
1N5231A/B	5.1		<17	<1600				2.0 <+0.030
1N5232A/B	5.6		<11	<1600				3.0 <+0.038
1N5233A/B	6.0		<7	<1600				3.5 <+0.038
1N5234A/B	6.2		<7	<1000				4.0 <+0.045
1N5235A/B	6.8		<5	<750				5.0 <+0.050
1N5236A/B	7.5		<6	<500				6.0 <+0.058
1N5237A/B	8.2		<8	<500				6.5 <+0.062
1N5238A/B	8.7		<8					6.5 <+0.065
1N5239A/B	9.1		<10					7.0 <+0.068
1N5240A/B	10		<17					8.0 <+0.075
1N5241A/B	11		<22					<2 8.4 <+0.076
1N5242A/B	12		<30					<1 9.1 <+0.077
1N5243A/B	13	9.5	<13		<0.1	<0.5 9.9 <+0.079		
1N5244A/B	14	9.0	<15					10 <+0.082
1N5245A/B	15	8.5	<16					11 <+0.082
1N5246A/B	16	7.8	<17					12 <+0.083
1N5247A/B	17	7.4	<19					13 <+0.084
1N5248A/B	18	7.0	<21					14 <+0.085
1N5249A/B	19	6.6	<23					14 <+0.086