


Central
 Semiconductor Corp.
 Central
 Semiconductor Corp.
 Central
 Semiconductor Corp.
**Central™
 Semiconductor Corp.**
 145 Adams Avenue
 Hauppauge, New York 11788

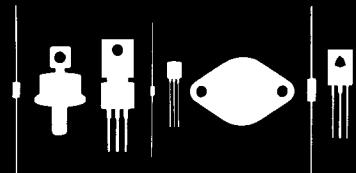

1N67A

GERMANIUM DIODE

JEDEC DO-7 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR 1N67A is a point contact Germanium Diode in a hermetically sealed glass case, designed for general purpose applications.

MAXIMUM RATINGS (T_A=25°C)

	<u>SYMBOL</u>		<u>UNIT</u>
Peak Repetitive Reverse Voltage	V _{RRM}	90	V
Average Forward Current	I _O	50	mA
Peak Forward Current	I _{FM}	150	mA
Peak Forward Surge Current (1.0s)	I _{FSM}	500	mA
Power Dissipation	P _D	80	mW
Operating and Storage Junction Temperature	T _J , T _{Stg}	-50 TO +75	°C

ELECTRICAL CHARACTERISTICS (T_A=25°C)

	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNIT</u>
V _F	I _F =5.0mA		1.0	Volts
B _{VR}	I _R =1.0mA	90		Volts
I _R	V _R =5.0V		5.0	μA
I _R	V _R =50V		50	μA

Central™
 Semiconductor Corp.

145 Adams Avenue
 Hauppauge, NY 11788 USA
 Tel: (631) 435-1110 • Fax: (631) 435-1824
www.centralsemi.com