

# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
 SPRINGFIELD, NEW JERSEY 07081  
 U.S.A.

TELEPHONE: (973) 376-2922  
 (212) 227-6005  
 FAX: (973) 376-8960

## 30S SERIES

### DESCRIPTION/FEATURES

- ECONOMICAL SERIES
- HIGH SURGE, 150 AMP MAXIMUM
- UNIVERSAL REPLACEMENT FOR MANY GLASS, EPOXY, ENCAPSULATED, AND METALLIC RECTIFIERS
- PEAK REVERSE VOLTAGES THROUGH 1000 VOLTS

### VOLTAGE RATINGS

Part Number	$V_{RRM}$ - Working Peak Reverse Voltage (V)	$V_R$ - Max. Direct Reverse Voltage (V)
	$T_J = -65^\circ\text{C}$ to $175^\circ\text{C}$	$T_J = -65^\circ\text{C}$ to $175^\circ\text{C}$
30S1	100	100
30S2	200	200
30S3	300	300
30S4	400	400
30S5	500	500
30S6	600	600
30S8	800	800
30S10	1000	1000

### ELECTRICAL SPECIFICATIONS


Symbol	Parameter	Value	Units	Conditions
$I_F(AV)$	Max. average forward current	3.0	A	1 phase operation, $180^\circ$ conduction, $T_L = 125^\circ\text{C}$ , lead length 9.5 mm (0.375 in.)
$I_{FSM}$	Max. peak one-cycle non-repetitive surge current	143	A	Half cycle 50 Hz sine wave or 6 ms rectangular pulse Following any rated load condition and with rated $V_{RRM}$ applied.
		150		
		170		
		178		
$I^2t$	Max. $I^2t$ for fusing	103	$A^2s$	$t = 10$ ms With rated $V_{RRM}$ applied following $t = 8.3$ ms surge, initial $T_J = 175^\circ\text{C}$ .
		94		
		146		
$I^2\sqrt{t}$	Max. $I^2\sqrt{t}$ for individual device fusing	146	$A^2\sqrt{s}$	$t = 10$ ms with $V_{RRM} = 0$ following surge, $t = 8.3$ ms initial $T_J = 175^\circ\text{C}$ .
		133		
$V_{FM}$	Max. peak forward voltage	1.0	V	$I_F(AV) = 3A$ (9.4A peak), $T_J = 25^\circ\text{C}$ .
$I_R(AV)$	Max. average reverse current	0.3	mA	Max. rated $I_F(AV)$ , $V_{RRM}$ and $T_L = 100^\circ\text{C}$ . ( $l = 9.5$ mm (0.375 in.))

⊙  $I^2t$  for time  $t_x = I^2\sqrt{t} \cdot \sqrt{t_x}$ .

### THERMAL-MECHANICAL SPECIFICATIONS

$T_J$	Max. operating junction temperature range	-65 to 175	$^\circ\text{C}$
$T_{stg}$	Max. storage temperature range	-65 to 175	$^\circ\text{C}$
$R_{thJC}$	Max. internal thermal resistance, junction-to-lead	16.5	deg. C/W
wt	Approximate weight	0.65 (0.023)	g (oz.)

### 3 AMP MEDIUM POWER SILICON RECTIFIER DIODES

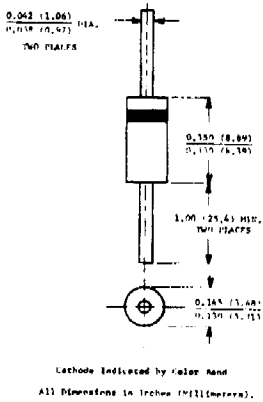

### MECHANICAL CHARACTERISTICS

- CASE: Molded plastic use Flame Retardant Epoxy.
- TERMINALS: Axial leads, solderable per MIL-STD-202, Method 208.
- POLARITY: Color band denotes cathode.
- MOUNTING POSITION: Any.



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that data sheets are current before placing orders.