


#### Mounting Pad Layout

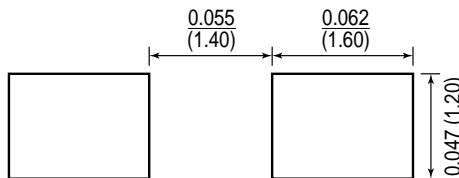

#### Features

- Low turn-on voltage • Low capacitance
- Ultrafast switching
- Ideal for single or double, UHF balanced mixer, modulators and phase detectors.
- These diodes are also available in case styles SOT-23 with type designation BAT17, and SOD-123 with type designation BAT17W

#### Mechanical Data

**Case:** SOD-323 Plastic Package

**Weight:** approx. 0.004g

**Marking Code:** L7

**Packaging Codes/Options:**

D5/10K per 13" reel (8mm tape), 30K/box

D6/3K per 7" reel (8mm tape), 30K/box

#### Maximum Ratings and Thermal Characteristics ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Continuous Reverse Voltage	$V_R$	4	V
Forward Current	$I_F$	30	mA
Power Dissipation at $T_C = 25^\circ\text{C}$	$P_{tot}$	150 <sup>(1)</sup>	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	650 <sup>(1)</sup>	$^\circ\text{C}/\text{W}$
Maximum Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature Range	$T_s$	-65 to +150	$^\circ\text{C}$

#### Electrical Characteristics ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Minimum Reverse Breakdown Voltage at $10\mu\text{A}$	$V_{(BR)R}$	4	V
Maximum Leakage Current at $V_R = 3\text{V}$ at $V_R = 3\text{V}$ , $T_{amb} = 60^\circ\text{C}$	$I_R$	0.25 1.25	$\mu\text{A}$
Maximum Forward Voltage at $I_F = 10 \text{ mA}$	$V_F$	600	mV
Maximum Diodes Capacitance at $V_R = 0\text{V}$ , $f = 1 \text{ MHz}$	$C_D$	1.0	pF