


# International IOR Rectifier

## BAT54CW

### SCHOTTKY DIODE

0.2 Amp



#### Major Ratings and Characteristics

Characteristics	Value	Units
$I_F$ (DC) Per Leg	0.2	A
$V_{RRM}$	30	V
$I_{FSM}$ @ $t_p = 10$ ms sine	1.0	A
$V_F$ @ 30mA DC, $T_J = 25^\circ\text{C}$	0.5	V
$P_d$ Power Dissipation @ $T_A = 25^\circ\text{C}$	200	mW
$T_J$ range	- 65 to 150	$^\circ\text{C}$

#### Description/ Features

This Schottky barrier double diode is designed for high speed switching application, voltage clamping and circuit protection. Miniature surface mount packages with reduced foot print are excellent for portable application where space is limited

- Small foot print, surface mountable
- Very low forward voltage drop
- Extremely fast switching speed for high frequency operation
- Guard ring for enhanced ruggedness and long term reliability

#### Case Styles

Device Marking: IR4A

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	0.25	0.40	0.010	0.016
B	1.15	1.35	0.045	0.053
C	2.00	2.20	0.079	0.087
D	-	0.65	-	0.026
F	0.30	0.40	0.012	0.016
G	1.20	1.40	0.047	0.055
H	1.80	2.20	0.071	0.087
J	0.00	0.10	0.000	0.004
K	0.90	1.00	0.035	0.039
L	0.10	0.30	0.004	0.012
M	0.109	0.25	0.004	0.010
$\alpha$	8 $^\circ$		8 $^\circ$	

**Outline SOT323**

# BAT54CW

Preliminary Data Sheet PD-20639 12/01



## Voltage Ratings

Part number	Value
$V_R$ Max. DC Reverse Voltage (V)	30
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)	

## Absolute Maximum Ratings

Parameters	Value	Units	Conditions
$I_F$ Forward Current	0.2	A	DC, per Leg
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current, @ $T_J = 25^\circ\text{C}$	8.4	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse
	1.0	A	10ms Sine or 6ms Rect. pulse

Following any rated load condition and with rated  $V_{RWM}$  applied

## Electrical Specifications

Parameters	Value	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1)	0.24	V	@ 0.1mA
	0.32	V	@ 1mA
$V_{FM}$ Max. Forward Voltage Drop (1)	0.40	V	@ 10mA
	0.50	V	@ 30mA
	0.65	V	@ 100mA
$I_{RM}$ Max. Reverse Leakage Current	2	$\mu\text{A}$	$V_R = 25\text{V}$
	3	$\mu\text{A}$	$V_R = 30\text{V}$
$C_T$ Max. Junction Capacitance	10	pF	$V_R = 1V_{DC}$ (test signal range 100KHz to 1Mhz), $T_J = 25^\circ\text{C}$
$dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )	10000	V/ $\mu\text{s}$	

$T_J = 25^\circ\text{C}$

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

Parameters	Value	Units	Conditions
$T_J$ Max. Junction Temperature Range (*)	-65 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-65 to 150	$^\circ\text{C}$	
$R_{th(j-a)}$ Max. Thermal Resistance Junction to Ambient	625	$^\circ\text{C/W}$	Mounted on PC board FR4 with minimum pad size
Wt Approximate Weight	0.006	gr	
Case Style	SOT323		
Device Marking	IR4C		

(\*)  $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

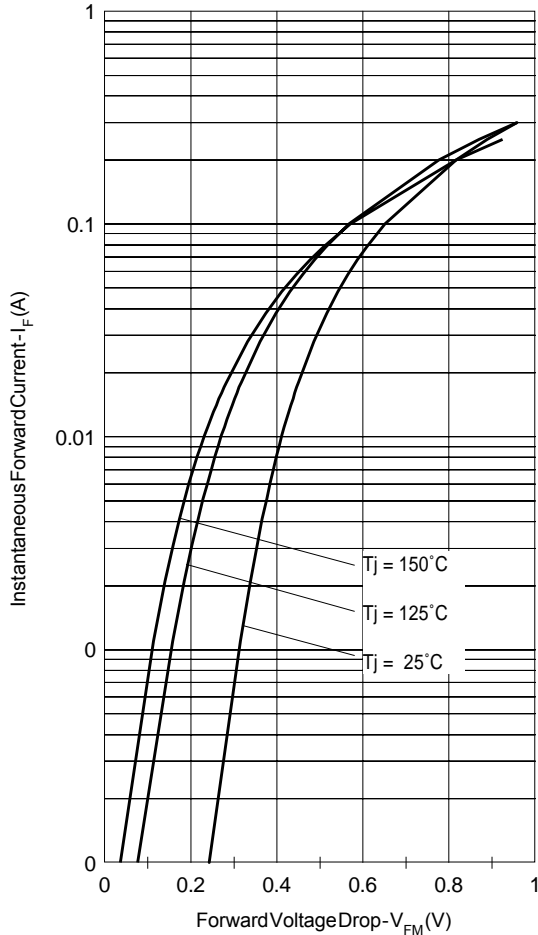


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

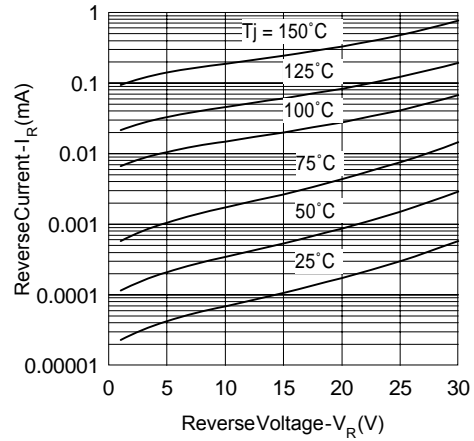


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (PerLeg)

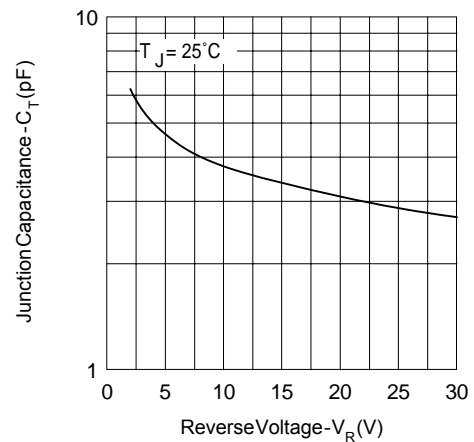


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (PerLeg)

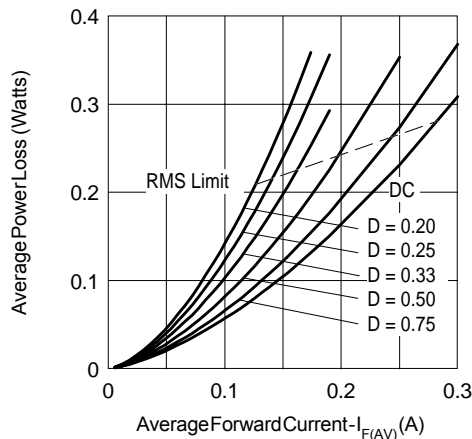


Fig. 4 - Forward Power Loss Characteristics

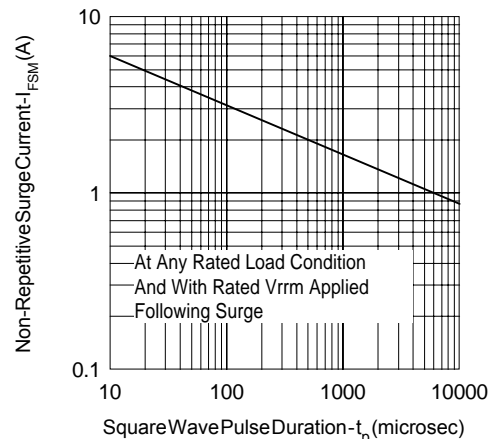



Fig. 5 - Max. Non-Repetitive Surge Current

# BAT54CW

Preliminary Data Sheet PD-20639 12/01

International  
**IR** Rectifier

## Tape & Reel Information

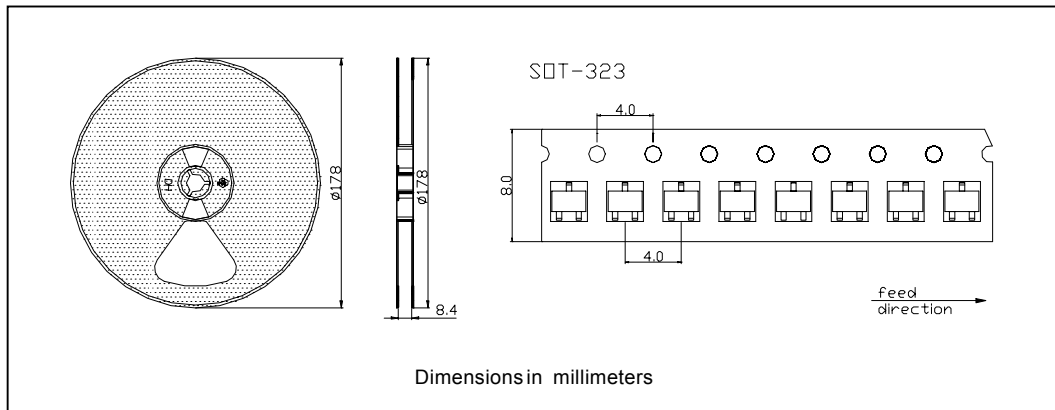

## Ordering Information Table

Device	Package	Marking	Configuration	Base qty	Delivery mode
BAT54CW	SOT-323	IR4C	C. Cathode	3000	Tape & reel

Data and specifications subject to change without notice.  
This product has been designed for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 12/01