


## RECTIFIER DIODES

## MAIN PRODUCTS CHARACTERISTICS

I <sub>F(av)</sub>	10 A
V <sub>RRM</sub>	800 V
V <sub>F(max)</sub>	1.45 V

- STANDARD RECTIFIER
- HIGH SURGE CURRENT CAPABILITY
- LOW FORWARD VOLTAGE DROP

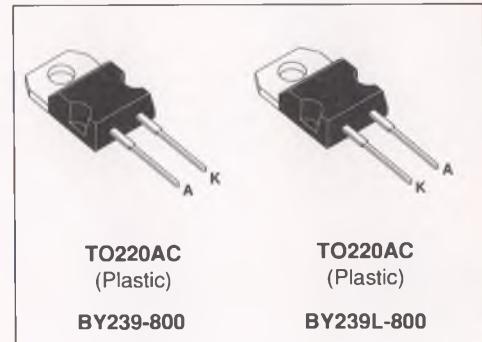

## ABSOLUTE MAXIMUM RATINGS (limiting values)

Symbol	Parameter	Value	Unit
I <sub>F(AV)</sub>	Average forward current *	10	A
I <sub>FSM</sub>	Surge non repetitive forward current	140	A
P <sub>tot</sub>	Power dissipation *	12.5	W
T <sub>stg</sub> T <sub>j</sub>	Storage and junction temperature range	- 40 to + 125	°C

\* Single phase, half wave, resistive or inductive load.

Symbol	Parameter	BY239(L)-				Unit
		200	400	600	800	
V <sub>RRM</sub>	Repetitive peak reverse voltage	200	400	600	800	V

## THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
R <sub>th</sub> (j-c)	Junction to case	2	°C/W

## ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
V <sub>F</sub> *	T <sub>j</sub> = 25°C	I <sub>F</sub> = 30 A			1.45	V
I <sub>R</sub> **	T <sub>j</sub> = 125°C	V <sub>R</sub> = V <sub>RRM</sub>			500	µA

Pulse test : \* tp = 380 µs, duty cycle < 2 %

\*\* tp = 5 ms, duty cycle < 2 %