


### Current Regulator Diodes

**CR160 CR220 CR300 CR390**  
**CR180 CR240 CR330 CR430**  
**CR200 CR270 CR360 CR470**

### Product Summary

Part Number	Typ $I_F$ (mA)	Min $P_{OV}$ (V)	Part Number	Typ $I_F$ (mA)	Min $P_{OV}$ (V)
CR160	1.60	100	CR300	3.00	100
CR180	1.80	100	CR330	3.30	100
CR200	2.00	100	CR360	3.60	100
CR220	2.20	100	CR390	3.90	100
CR240	2.40	100	CR430	4.30	100
CR270	2.70	100	CR470	4.70	100

For applications information see AN103.

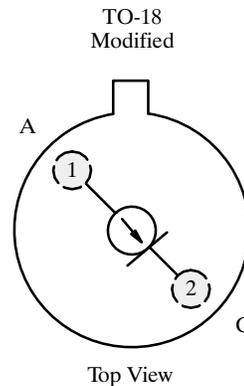

### Features

- Two-Lead Hermetic Package
- Guaranteed Tight  $\pm 10\%$  Tolerance
- Operation from 1 V (CR160) to 100 V
- Excellent Temperature Stability

### Benefits

- Simple Series Circuitry, No Separate Voltage Source
- Tighter Guaranteed Circuit Performance
- Excellent Performance in Low-Voltage/Battery Circuits and High-Voltage Spike Protection
- High Circuit Stability vs. Temperature

### Applications

- Constant-Current Supply
- Current-Limiting
- Timing Circuits


### Description

The CR160 series is a family of  $\pm 10\%$  range current regulators designed for demanding applications in test equipment and instrumentation. These devices combine a JFET with an integrated resistor to produce a single two-leaded device which is extremely simple to operate. With nominal current ranges from 1.60 mA



to 4.70 mA, this series will meet a wide array of design requirements.

The TO-206AA hermetically sealed package is available with military processing per MIL-S-19500 (see Military Information).

### Schematic Diagram



### Applications



# CR160 Series

## Absolute Maximum Ratings

Peak Operating Voltage ..... 100 V  
 Reverse Current ..... 50 mA  
 Thermal Resistance ( $\theta_{JC}$ ) ..... 100°C/W  
 Storage Temperature ..... -55 to 200°C

Power Dissipation<sup>a</sup> ..... 300 mW

Notes:  
 a. Derate 2.4 mW/°C above 25°C

## Specifications<sup>a</sup>







Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ <sup>b</sup>	Max	
Peak Operating Voltage <sup>c</sup>	$P_{OV}$	$I_F = 1.1 I_{F(max)}$	100	175		V
Reverse Voltage	$V_R$	$I_R = 1 \text{ mA}$		0.8		
Capacitance	$C_F$	$V_F = 25 \text{ V}, f = 1 \text{ MHz}$		6		pF

Part Number	Regulator Current <sup>d</sup> ( $I_F$ )			Dynamic Impedance <sup>e</sup> ( $Z_d$ )		Knee Impedance ( $Z_k$ )		Limiting Voltage <sup>f</sup> ( $V_L$ )		Temperature Coefficient ( $\theta_I$ )
	Min	Nom	Max	Min	Typ <sup>b</sup>	Min	Typ <sup>b</sup>	Max	Typ <sup>b</sup>	ppm/°C
	$V_F = 25 \text{ V}$			$V_F = 25 \text{ V}$		$V_F = 6 \text{ V}$		$I_F = 0.8 I_{F(min)}$		$V_F = 25 \text{ V}$ $0^\circ\text{C} \leq T_A \leq 100^\circ\text{C}$
	mA			M $\Omega$		M $\Omega$		V		
CR160	1.440	1.60	1.760	0.475	1.10	0.092	0.40	1.65	0.70	1000
CR180	1.620	1.80	1.980	0.420	1.00	0.074	0.34	1.75	0.75	650
CR200	1.800	2.00	2.200	0.395	0.90	0.061	0.28	1.85	0.80	300
CR220	1.980	2.20	2.420	0.370	0.83	0.052	0.25	1.95	0.85	100
CR240	2.160	2.40	2.640	0.345	0.76	0.044	0.22	2.00	0.90	0
CR270	2.430	2.70	2.970	0.320	0.70	0.035	0.19	2.15	0.95	-200
CR300	2.700	3.00	3.300	0.300	0.65	0.029	0.16	2.25	1.00	-400
CR330	2.970	3.30	3.630	0.280	0.60	0.024	0.14	2.35	1.05	-550
CR360	3.240	3.60	3.960	0.265	0.54	0.020	0.13	2.50	1.10	-730
CR390	3.510	3.90	4.290	0.255	0.47	0.017	0.12	2.60	1.17	-820
CR430	3.870	4.30	4.730	0.245	0.40	0.014	0.10	2.75	1.25	-1000
CR470	4.230	4.70	5.170	0.235	0.35	0.012	0.09	2.90	1.32	-1125

Notes:





- $T_A = 25^\circ\text{C}$  unless otherwise noted.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- Peak voltage at which  $I_F = 1.1 I_{F(max)}$ .
- Pulse test—steady state currents may vary.
- Pulse test—steady state impedances may vary.
- Min  $V_F$  required to insure  $I_F = 0.8 I_{F(min)}$ .

## Typical Characteristics

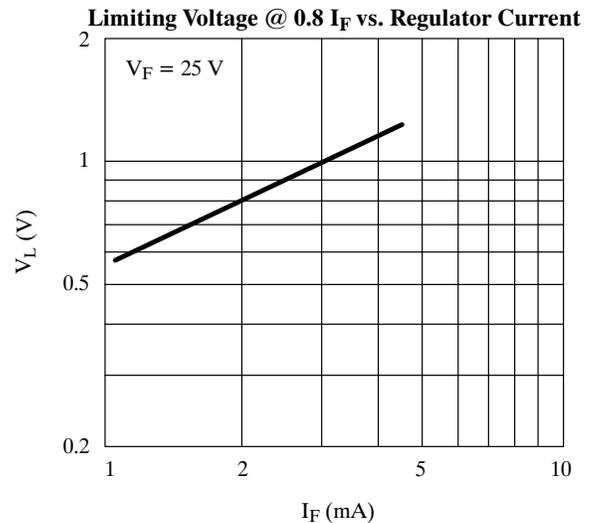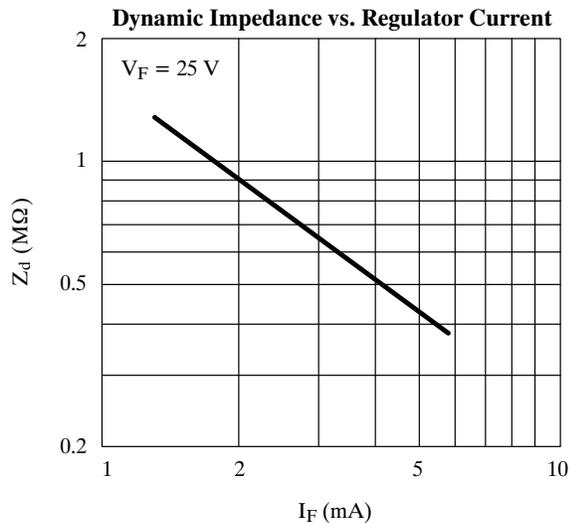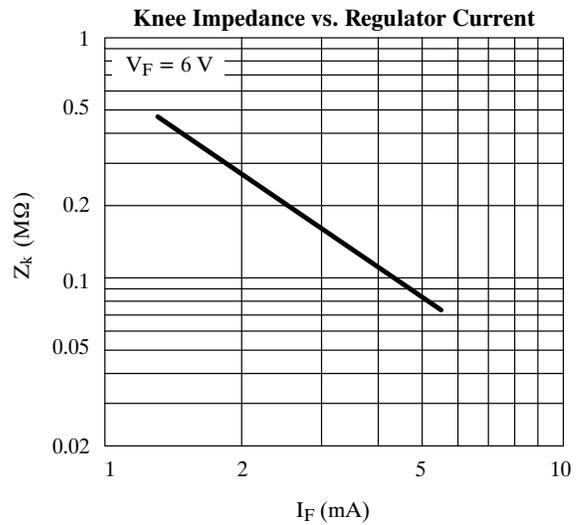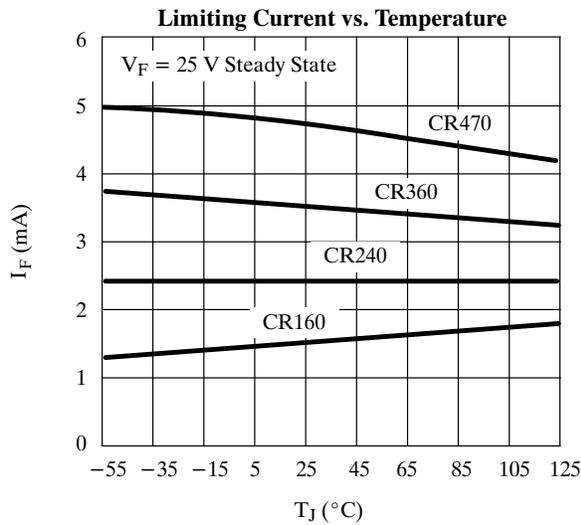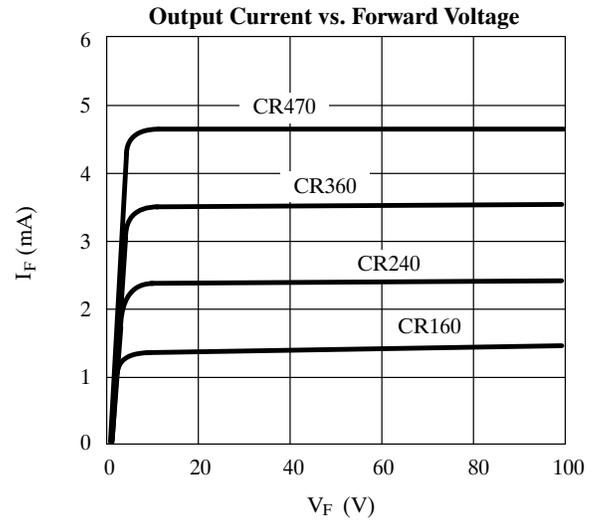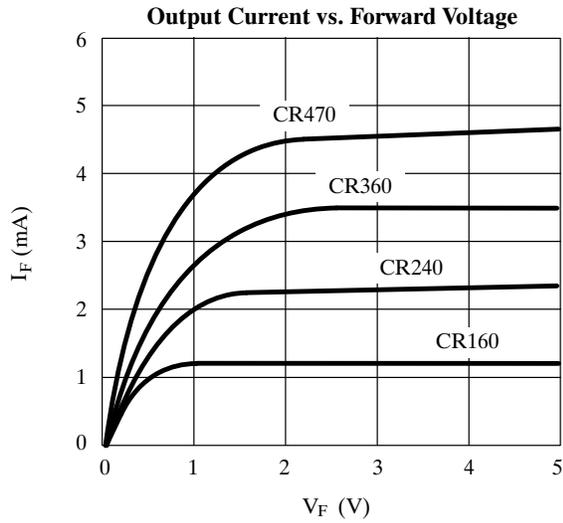

## CR160 Series

### Typical Characteristics (Cont'd)

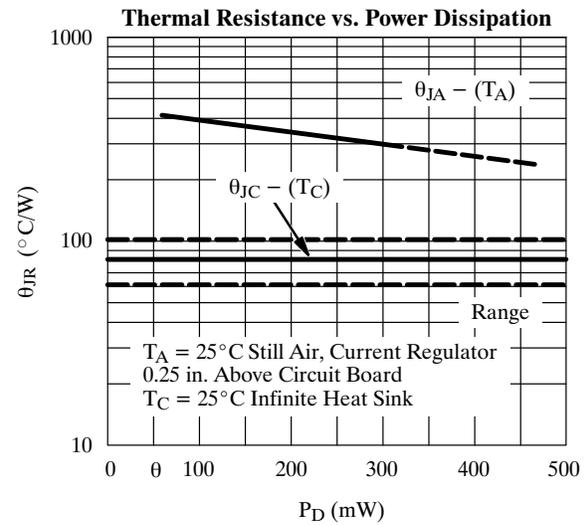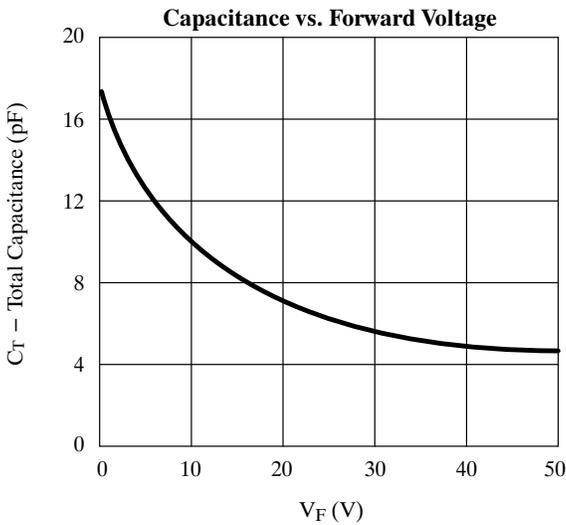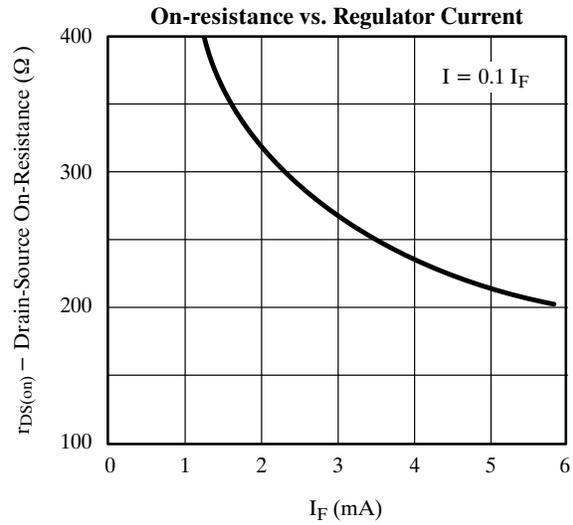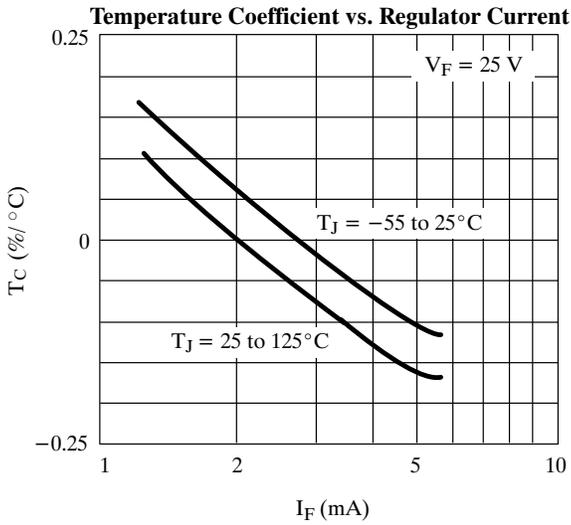

### Current-Regulator Diode V-I Characteristic

