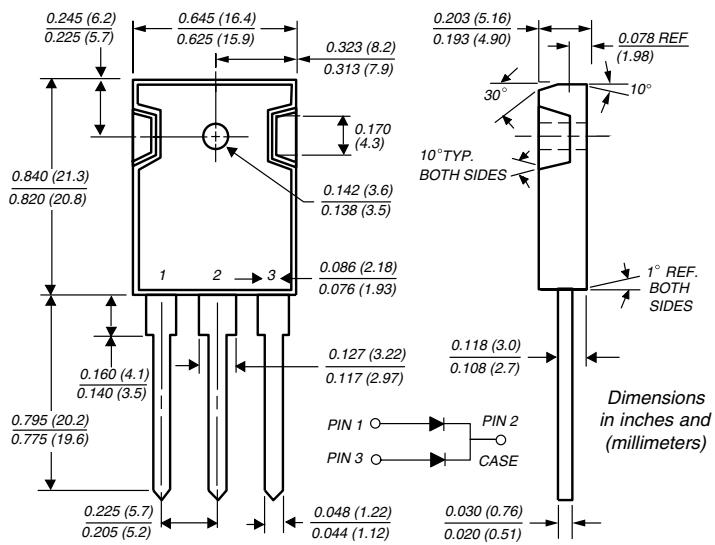

**TO-247AD (TO-3P)**


## Dual Schottky Rectifiers

Reverse Voltage 35 to 60V

Forward Current 30A

### Features

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- Dual rectifier construction, positive center-tap
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free-wheeling, and polarity protection applications
- Guardring for overvoltage protection
- High temperature soldering guaranteed: 250°C/10 seconds, 0.17" (4.3mm) from case

### Mechanical Data

**Case:** JEDEC TO-247AD molded plastic body

**Terminals:** Lead solderable per MIL-STD-750, Method 2026

**Polarity:** As marked **Mounting Position:** Any

**Mounting Torque:** 10 in-lbs max.

**Weight:** 0.2oz., 5.6g

### Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	MBR3035PT	MBR3045PT	MBR3050PT	MBR3060PT	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	35	45	50	60	V
Maximum working peak reverse voltage	V <sub>RWM</sub>	35	45	50	60	V
Maximum DC blocking voltage	V <sub>DC</sub>	35	45	50	60	V
Maximum average forward rectified current (See Fig. 1)	I <sub>F(AV)</sub>			30		A
Peak repetitive forward current per leg at T <sub>C</sub> = 105°C (rated V <sub>R</sub> , square wave, 20 KHz)	I <sub>FRM</sub>			30		A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>			200		A
Peak repetitive reverse surge current <sup>(1)</sup>	I <sub>RRM</sub>		2.0		1.0	A
Thermal resistance from junction to case per leg	R <sub>θJC</sub>			1.4		°C/W
Voltage rate of change at (rated V <sub>R</sub> )	dv/dt			10,000		V/μs
Operating junction temperature range	T <sub>J</sub>			−65 to +150		°C
Storage temperature range	T <sub>STG</sub>			−65 to +175		°C

### Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	MBR3035PT	MBR3045PT	MBR3050PT	MBR3060PT	Unit
Maximum instantaneous forward voltage per leg at: <sup>(2)</sup>	I <sub>F</sub> = 20A, T <sub>C</sub> = 25°C I <sub>F</sub> = 20A, T <sub>C</sub> = 125°C I <sub>F</sub> = 30A, T <sub>C</sub> = 25°C I <sub>F</sub> = 30A, T <sub>C</sub> = 125°C	V <sub>F</sub>	— 0.60 0.76 0.72	0.75 0.65 — —	— 0.65 — —	V
Maximum instantaneous reverse current at rated DC blocking voltage per leg <sup>(2)</sup>	I <sub>R</sub>	1.0 60	5.0 100	—	—	mA


Notes: (1) 2.0μs pulse width, f = 1.0 KHz

(2) Pulse test: 300μs pulse width, 1% duty cycle


## Dual Schottky Rectifiers

### Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Forward Current Derating Curve**

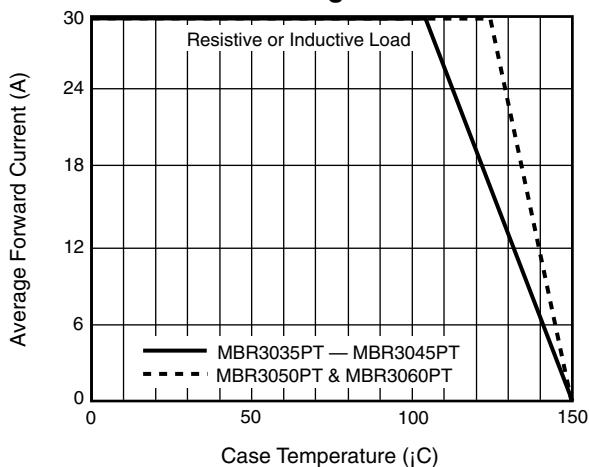


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

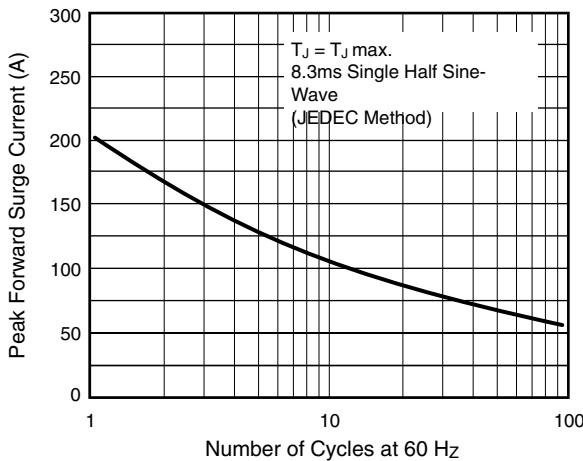


**Fig. 3 – Typical Instantaneous Forward Characteristics Per Leg**

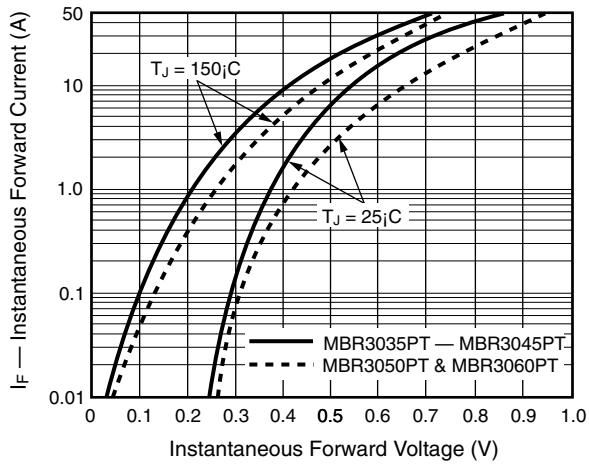

**Fig. 4 – Typical Reverse Characteristics Per Leg**

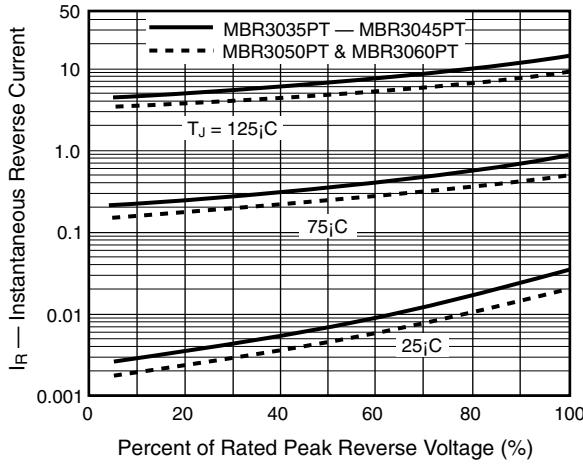

**Fig. 5 – Typical Junction Capacitance Per Leg**

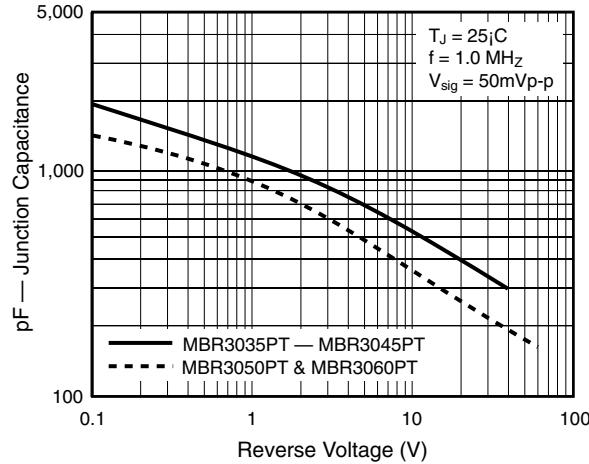

**Fig. 6 – Typical Transient Thermal Impedance Per Leg**

