


### Features

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability

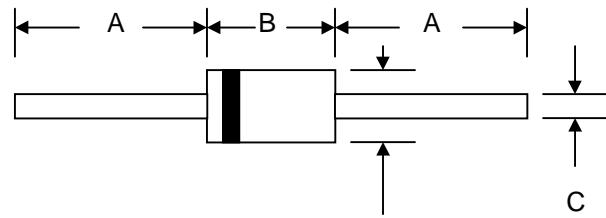

### Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.40 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

DO-15		
Dim	Min	Max
A	25.4	—
B	5.50	7.62
C	0.71	0.864
D	2.60	3.60

All Dimensions in mm

### Maximum Ratings and Electrical Characteristics $\text{@ } T_A = 25^\circ\text{C}$ unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristic	Symbol	SFR201	SFR202	SFR203	SFR204	SFR205	SFR206	SFR207	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Average Rectified Output Current (Note 1) $\text{@ } T_A = 55^\circ\text{C}$	$I_O$	2.0						A	
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	60						A	
Forward Voltage $\text{@ } I_F = 2.0\text{A}$	$V_{FM}$	1.2						V	
Peak Reverse Current $\text{@ } T_A = 25^\circ\text{C}$ At Rated DC Blocking Voltage $\text{@ } T_A = 100^\circ\text{C}$	$I_{RM}$	5.0 100						$\mu\text{A}$	
Reverse Recovery Time (Note 2)	$t_{rr}$	120			200	350			nS
Typical Junction Capacitance (Note 3)	$C_J$	30						pF	
Operating Temperature Range	$T_J$	-65 to +125						°C	
Storage Temperature Range	$T_{STG}$	-65 to +150						°C	

#### \*Glass passivated forms are available upon request

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

2. Measured with IF = 0.5A, IR = 1.0A, IRR = 0.25A. See figure 5.

3. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

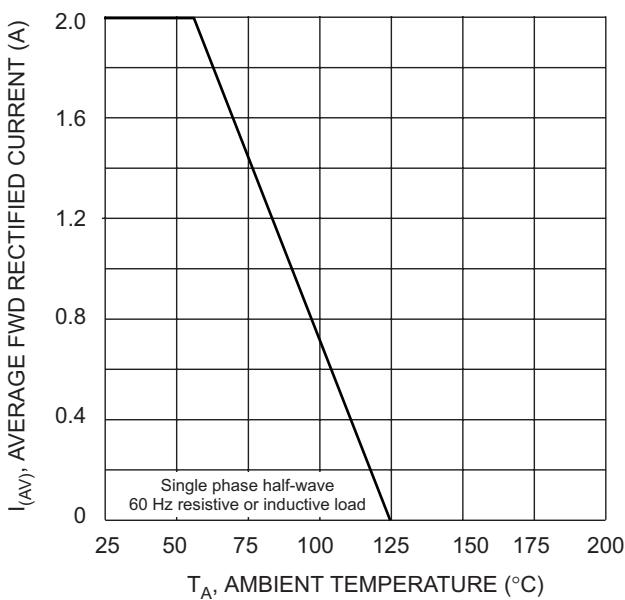


Fig. 1 Forward Derating Curve

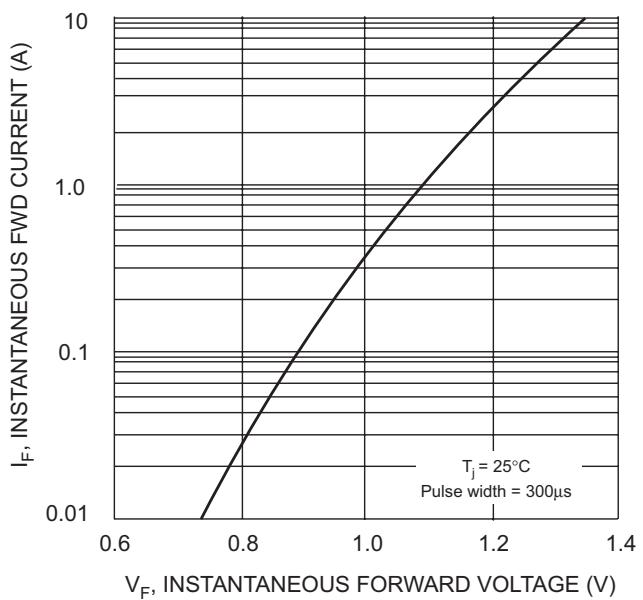


Fig. 2 Typical Forward Characteristics

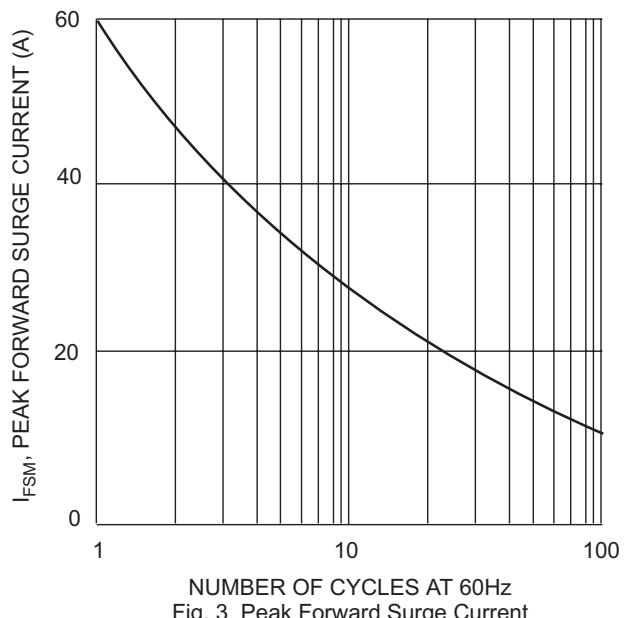


Fig. 3 Peak Forward Surge Current


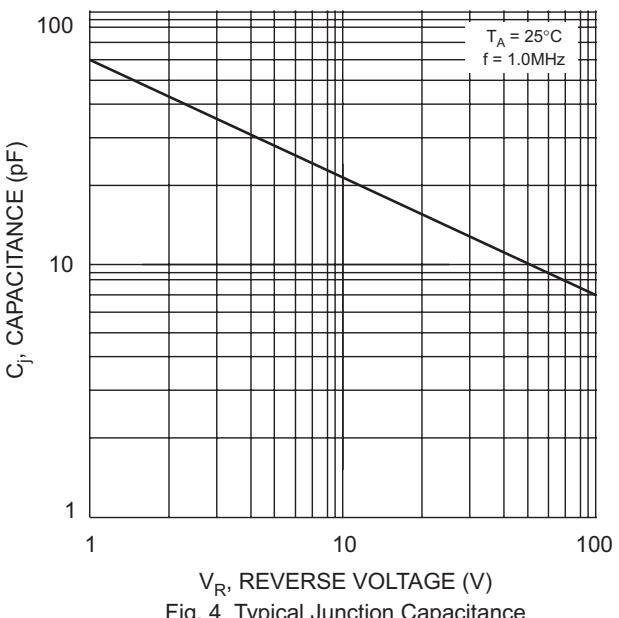


Fig. 4 Typical Junction Capacitance

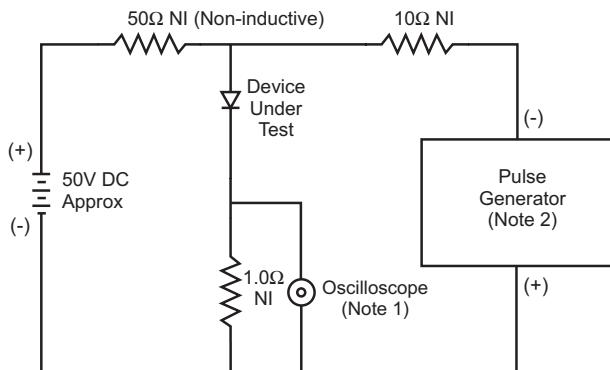

Notes:

1. Rise Time = 7.0ns max. Input Impedance = 1.0MΩ, 22pF.
2. Rise Time = 10ns max. Input Impedance = 50Ω.

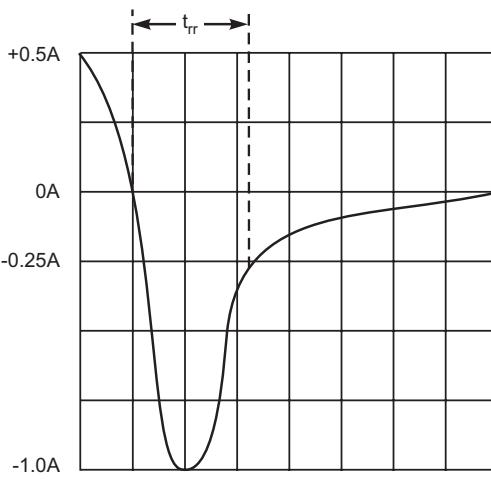


Fig. 5 Reverse Recovery Time Characteristic and Test Circuit