

**STPS340U/S/B**

POWER SCHOTTKY RECTIFIER

MAIN PRODUCT CHARACTERISTICS


I _{F(AV)}	3 A
V _{RRM}	40 V
T _{j(max)}	150 °C
V _{F(max)}	0.57 V

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- LOW FORWARD VOLTAGE DROP
- LOW THERMAL RESISTANCE
- EXTREMELY FAST SWITCHING
- SURFACE MOUNTED DEVICE

DESCRIPTION

Single chip Schottky rectifier suited for Switch Mode Power Supplies and high frequency DC to DC converters.

Packaged in SMB, SMC and DPAK this device is intended for use in low and medium voltage operation, high frequency inverters, free wheeling and polarity protection applications where low switching losses are required.

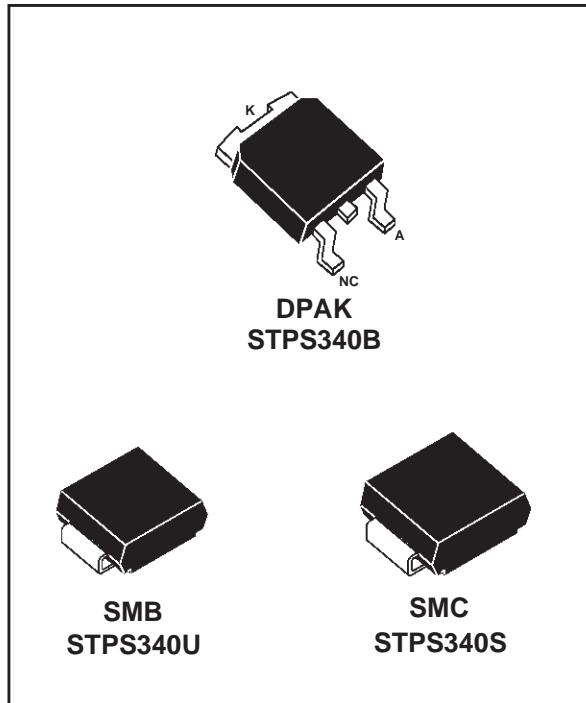

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
V _{RRM}	Repetitive peak reverse voltage		40	V
I _{F(RMS)}	RMS forward current		6	A
	SMB / SMC	10		
I _{F(AV)}	Average forward current	T _c = 135°C δ = 0.5	DPAK	A
		T _L = 105°C δ = 0.5	SMB / SMC	
I _{FSM}	Surge non repetitive forward current	tp = 10 ms Sinusoidal	75	A
I _{RRM}	Peak repetitive reverse current	tp = 2 μs F = 1kHz square	1	A
T _{stg}	Storage temperature range		- 65 to + 150	°C
T _j	Maximum operating junction temperature		+ 150	°C
dV/dt	Critical rate of rise of reverse voltage		10000	V/μs

STPS340U/S/B

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction to leads	SMC	20
		SMB	25
$R_{th(j-c)}$	Junction to case	DPAK	5.5

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Tests Conditions	Tests Conditions		Min.	Typ.	Max.	Unit
I_R^*	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			20	μA
		$T_j = 125^\circ\text{C}$	$V_R = V_{RRM}$		2	10	mA
V_F^*	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 3 \text{ A}$			0.63	V
		$T_j = 25^\circ\text{C}$	$I_F = 6 \text{ A}$			0.84	
		$T_j = 125^\circ\text{C}$	$I_F = 3 \text{ A}$		0.52	0.57	
		$T_j = 125^\circ\text{C}$	$I_F = 6 \text{ A}$		0.63	0.72	

Pulse test : * $t_p = 380 \mu\text{s}$, $\delta < 2\%$

To evaluate the maximum conduction losses use the following equation :
 $P = 0.42 \times I_{F(AV)} + 0.050 I_F^2(\text{RMS})$

Fig. 1: Average forward power dissipation versus average forward current.

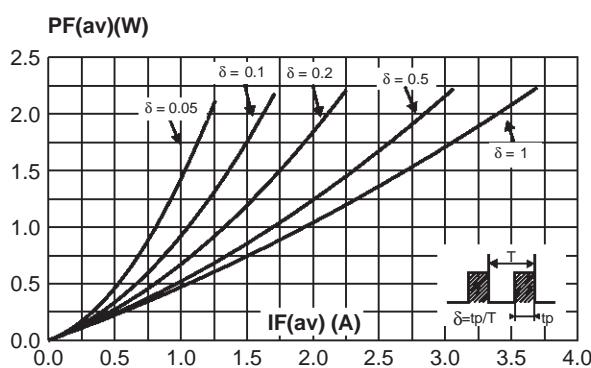


Fig. 2: Average current versus ambient temperature ($\delta = 0.5$).

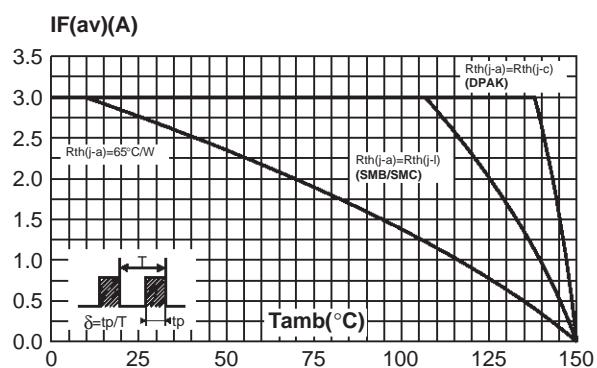


Fig. 3-1: Non repetitive surge peak forward current versus overload duration (SMB) (Maximum values).

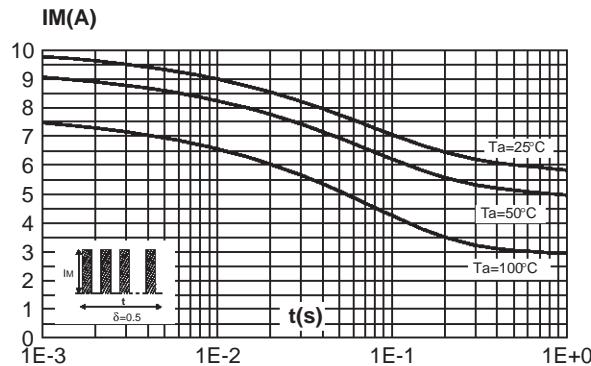


Fig. 3-3: Non repetitive surge peak forward current versus overload duration (DPAK) (Maximum values).

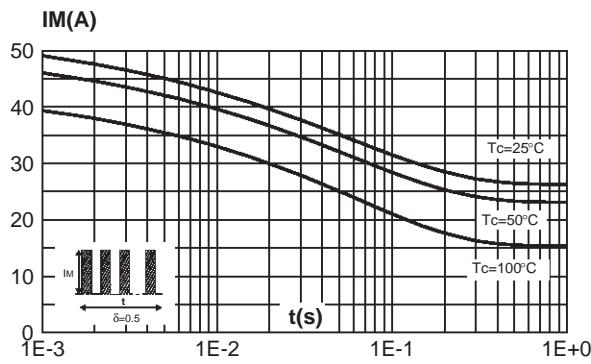


Fig. 4-2: Relative variation of thermal transient impedance junction to lead versus pulse duration (SMC).

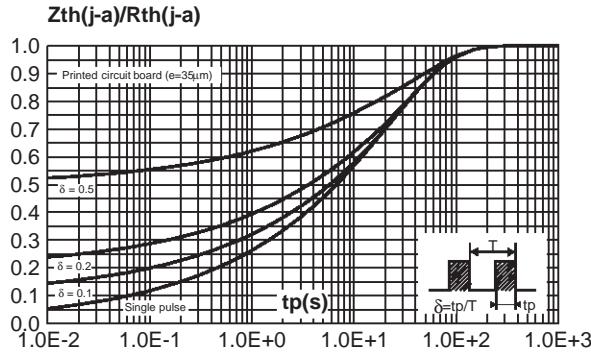


Fig. 3-2: Non repetitive surge peak forward current versus overload duration (SMC) (Maximum values).

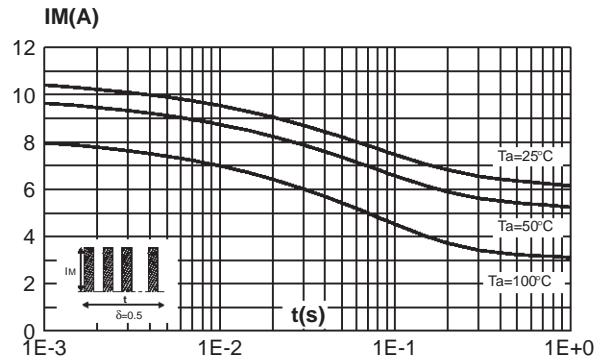


Fig. 4-1: Relative variation of thermal transient impedance junction to lead versus pulse duration (SMB).


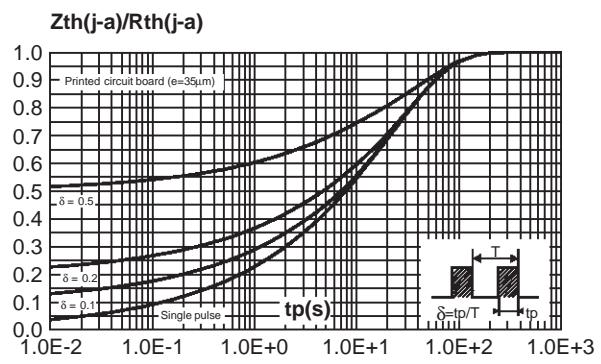


Fig. 4-3: Relative variation of thermal transient impedance junction to lead versus pulse duration(DPAK).

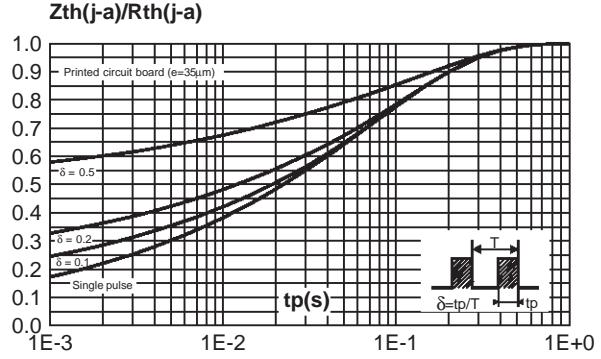

STPS340U/S/B

Fig. 5: Reverse leakage current versus reverse voltage applied. (Typical values)

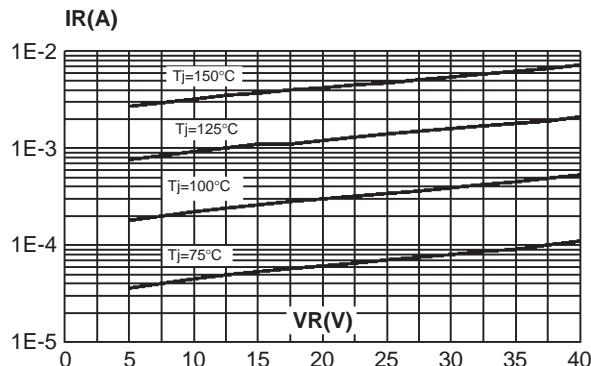


Fig. 6: Junction capacitance versus reverse voltage applied. (Typical values)

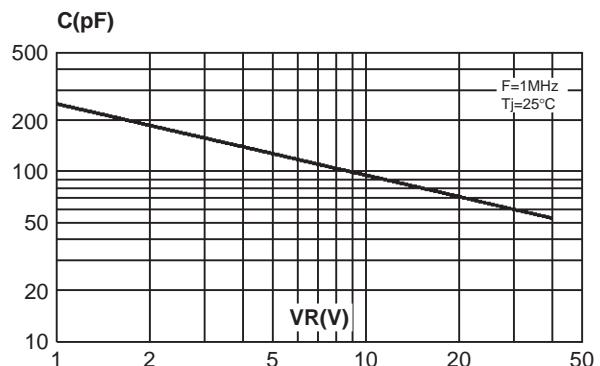


Fig. 7: Forward voltage drop versus forward current.(Maximum values)

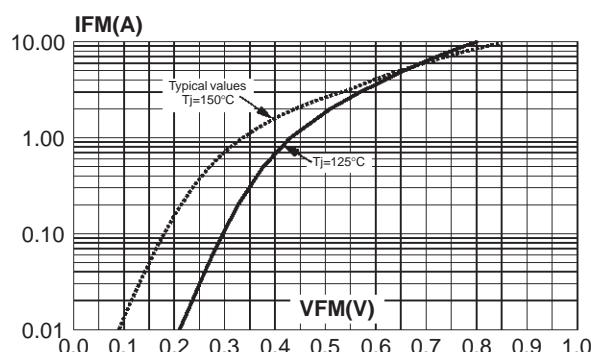


Fig. 8-1: Thermal resistance junction to ambient versus copper surface under tab (Epoxy printed circuit board FR4, copper thickness: 35μm) (SMB).

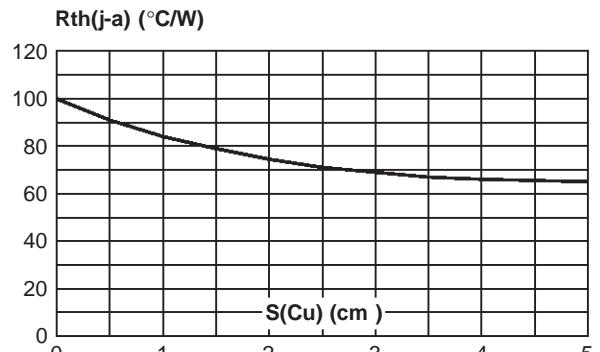


Fig. 8-2: Thermal resistance junction to ambient versus copper surface under tab (Epoxy printed circuitboard FR4, copper thickness: 35μm) (SMC).


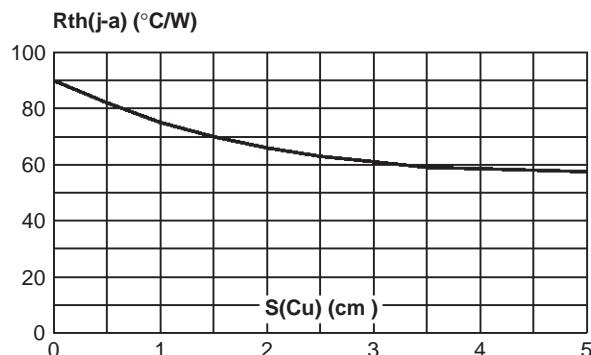



Fig. 8-3: Thermal resistance junction to ambient versus copper surface under tab (Epoxy printed circuitboard FR4, copper thickness: 35μm) (DPAK).

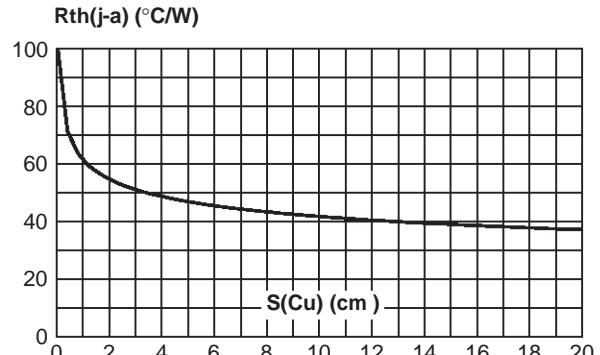

PACKAGE MECHANICAL DATA
DPAK

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max	Min.	Typ.	Max.
A	2.20		2.40	0.086		0.094
A1	0.90		1.10	0.035		0.043
A2	0.03		0.23	0.001		0.009
B	0.64		0.90	0.025		0.035
B2	5.20		5.40	0.204		0.212
C	0.45		0.60	0.017		0.023
C2	0.48		0.60	0.018		0.023
D	6.00		6.20	0.236		0.244
E	6.40		6.60	0.251		0.259
G	4.40		4.60	0.173		0.181
H	9.35		10.10	0.368		0.397
L2		0.80			0.031	
L4	0.60		1.00	0.023		0.039
V2	0°		8°	0°		8°

FOOTPRINT DIMENSIONS (in millimeters)

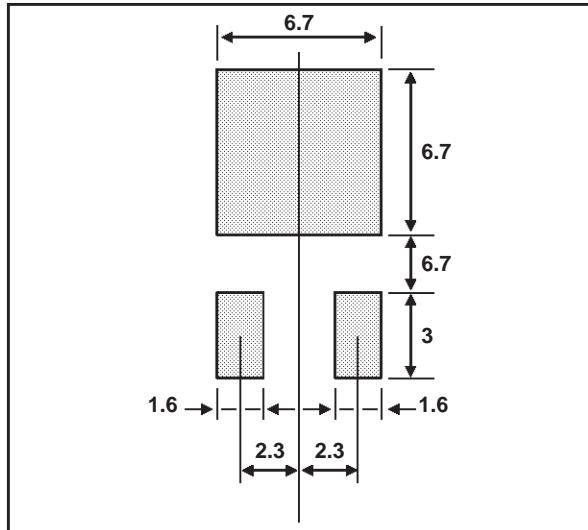


STPS340U/S/B

PACKAGE MECHANICAL DATA


SMB

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b	1.95	2.20	0.077	0.087
c	0.15	0.41	0.006	0.016
E	5.10	5.60	0.201	0.220
E1	4.05	4.60	0.159	0.181
D	3.30	3.95	0.130	0.156
L	0.75	1.60	0.030	0.063


FOOTPRINT DIMENSIONS (in millimeters)

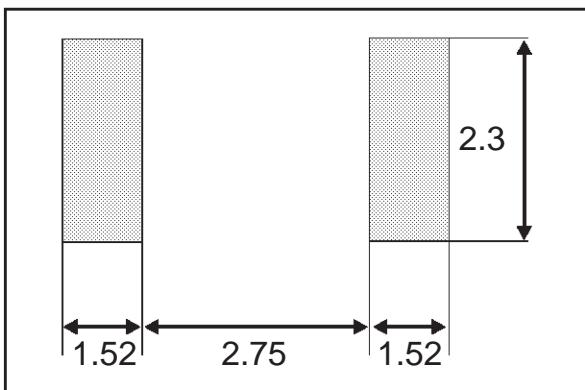

PACKAGE MECHANICAL DATA
 SMC

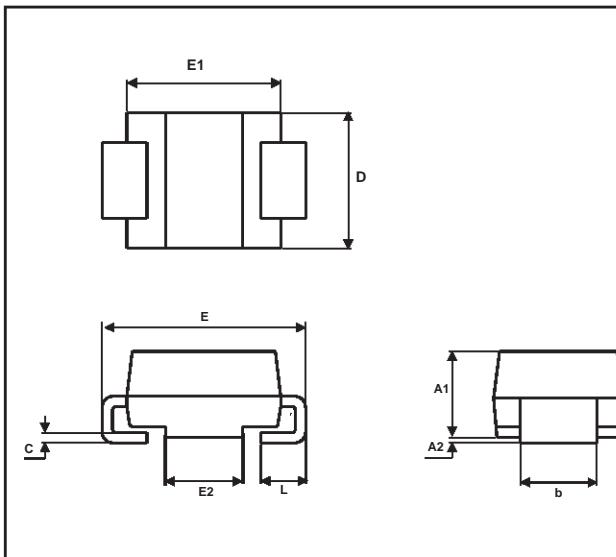

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b	2.90	3.2	0.114	0.126
c	0.15	0.41	0.006	0.016
E	7.75	8.15	0.305	0.321
E1	6.60	7.15	0.260	0.281
E2	4.40	4.70	0.173	0.185
D	5.55	6.25	0.218	0.246
L	0.75	1.60	0.030	0.063

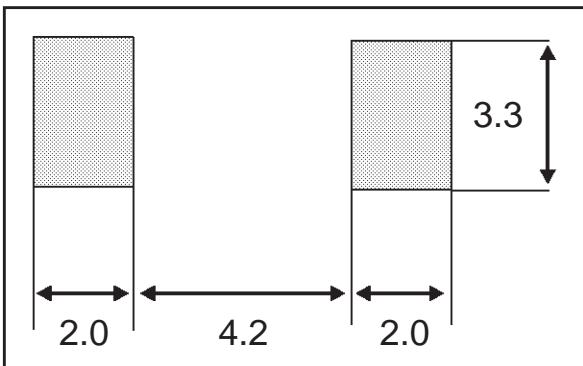FOOTPRINT DIMENSIONS (in millimeters)

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS340U	U34	SMB	0.107g	2500	Tape and reel
STPS340S	S34	SMC	0.243g	2500	Tape and reel
STPS340B	S340	DPAK	0.30g	75	Tube
STPS340B-TR	S340	DPAK	0.30g	2500	Tape and reel

■ Band indicates cathode on SMB, SMC

■ Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1998 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco -
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.