

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

2N5081 N.P.N. Silicon High Frequency

- HIGH FREQUENCY -- $f_T = 500$ MHz (MIN) AT 10 mA
- LOW CAPACITANCE -- $C_{obo} = 4.0$ pF (MAX) AT 5.0 V

ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures

- Storage Temperature
- Operating Junction Temperature
- Lead Temperature (Soldering, 60 second time limit)

-65°C to +200°C
200°C Maximum
300°C Maximum

Maximum Power Dissipation (Notes 2 and 3)

- Total Dissipation at 25°C Case Temperature
- at 100°C Case Temperature
- at 25°C Ambient Temperature

1.2 Watts
0.68 Watt
0.36 Watt


Maximum Voltages and Current

- V_{CBO} Collector to Base Voltage
- V_{CES} Collector to Emitter Voltage
- V_{CEO} Collector to Emitter Voltage (Note 4)
- V_{EBO} Emitter to Base Voltage
- I_C Collector Current (10 μ s Pulse)
- I_C DC Collector Current

40 Volts
40 Volts
50 Volts
4.5 Volts
500 mA
200 mA

PHYSICAL DIMENSIONS

in accordance with
JEDEC (TO-18) outline

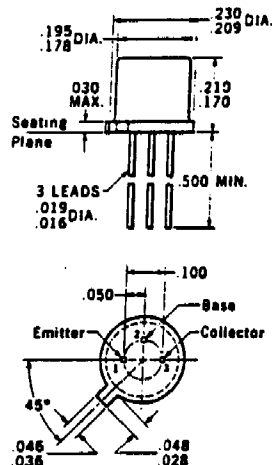

NOTES: All dimensions in inches
Leads are gold-plated lower
Collector internally connected to case
Package weight is 0.44 gram

ELECTRICAL CHARACTERISTICS

Characteristics	Symbols and Units	LIMITS		TEST CONDITIONS						
		Type 2N5081		Frequency	DC Collector-to-Emitter Voltage V_{CE}	DC Collector-to-Base Voltage V_{CB}	DC Emitter-to-Base Voltage V_{EB}	DC Emitter Current I_E	DC Collector Current I_C	DC Base Current I_B
		Min.	Max.	MHz	V	V	V	mA	mA	mA
Collector-Cutoff Current	I_{CBO} μA	-	30			20		0		
Collector-Cutoff Current	I_{CES} μA	-	0.4		20		0			
Collector-to-Base Breakdown Voltage	BV_{CBO} V	40	-					0	0.01	
Collector-to-Emitter Breakdown Voltage	BV_{CES} V	40	-				0		0.01	
Emitter-to-Base Breakdown Voltage	BV_{EBO} V	4.5	-					0.01	0	
Collector-to-Emitter Sustaining Voltage (Base open)	$V_{CE(sus)}$ V	50	-						10	
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$ V	-	0.2						10	1
		-	0.25 0.5						30 100	3 10
Base-to-Emitter Saturation Voltage	$V_{BE(sat)}$ V	-	0.85						10	1
		-	1.15 1.6						30 100	3 10
Static Forward Current-Transfer Ratio	h_{FE}	100	-		0.35				10	
		30	-		0.4				30	
		20	-		1				100	

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.