

Silicon PNP Power Transistor

2SA1077

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
 $V_{(BR)CEO} = -120V(\text{Min.})$
- Fast Switching Speed
- Wide Area of Safe Operation
- Complement to Type 2SC2527

APPLICATIONS


- High frequency power amplifiers
- Audio power amplifiers
- Switching regulators
- DC-DC converters

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-120	V
V_{CEO}	Collector-Emitter Voltage	-120	V
V_{EBO}	Emitter-Base Voltage	-7.0	V
I_C	Collector Current-Continuous	-10	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	60	W
T_J	Junction Temperature	150	°C
T_{stg}	Storage Temperature Range	-65~150	°C

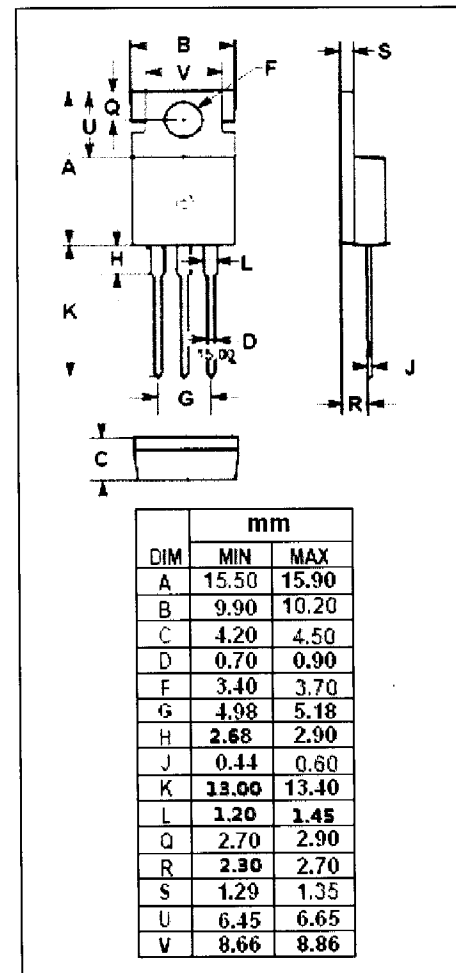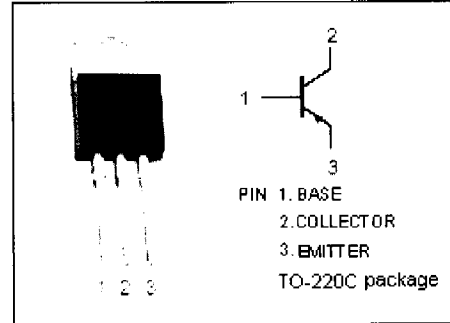

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Silicon PNP Power Transistor

2SA1077

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -1\text{mA}; R_{BE} = \infty$	-120			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C = -50\mu\text{A}; I_E = 0$	-120			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E = -50\mu\text{A}; I_C = 0$	-7			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -5\text{A}; I_B = -0.5\text{A}$			-1.8	V
$V_{BE(on)}$	Base to Emitter Voltage	$V_{CE} = -5\text{V}; I_C = 5\text{A}$			-1.7	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -120\text{V}; I_E = 0$			-50	μA
I_{CEO}	Collector Cutoff Current	$V_{CE} = -120\text{V}; I_B = 0$			-1.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -7\text{V}; I_C = 0$			-50	μA
h_{FE-1}	DC Current Gain	$I_C = -1\text{A}; V_{CE} = -5\text{V}$	60		200	
h_{FE-2}	DC Current Gain	$I_C = -5\text{A}; V_{CE} = -5\text{V}$	40			
C_{OB}	Output Capacitance	$I_E = 0; V_{CB} = -10\text{V}; f = 1.0\text{MHz}$		300		pF
f_T	Current-Gain—Bandwidth Product	$I_C = -1\text{A}; V_{CE} = -10\text{V}; f = 10\text{MHz}$		60		MHz

Switching Times

t_{on}	Turn-On Time	$I_C = -7.5\text{A}; I_{B1} = -I_{B2} = -0.75\text{A}; R_L = 4\Omega$		0.15		μs
t_{stg}	Storage Time			0.5		μs
t_f	Fall Time			0.11		μs