

MICROWAVE LOW NOISE AMPLIFIER  
NPN SILICON EPITAXIAL TRANSISTOR  
4 PINS MINI MOLD

DESCRIPTION

The 2SC4094R is an NPN epitaxial silicon transistor designed for use in low-noise and small signal amplifiers from VHF band to UHF band. Low-noise figure, high gain, and high current capability achieve a very wide dynamic range and excellent linearity. This achieved by direct nitride passivated base surface process (NESAT process) which is an NEC proprietary new fabrication technique.

FEATURES

- NF = 1.2 dB TYP. @ f = 1.0 GHz, V<sub>CE</sub> = 8 V, I<sub>c</sub> = 7 mA
- |S<sub>21e</sub>|<sup>2</sup> = 15 dB TYP. @ f = 1.0 GHz, V<sub>CE</sub> = 8 V, I<sub>c</sub> = 20 mA

ORDERING INFORMATION

PART NUMBER	QUANTITY	PACKING STYLE	QUALITY GRADE
2SC4094R-T1	3 Kpcs/Reel.	Embossed tape 8 mm wide. Pin 3 (Emitter), Pin 4 (Base) face to perforation side of the tape.	Standard
2SC4094R-T2	3 Kpcs/Reel.	Embossed tape 8 mm wide. Pin 1 (Emitter), Pin 2 (Collector) face to perforation side of the tape.	


\* Please contact with responsible NEC person, if you require evaluation sample. Unit sample quantity shall be 50 pcs. (Part No. : 2SC4094R)

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub> = 25 °C)

Collector to Base Voltage	V <sub>CB0</sub>	20	V
Collector to Emitter Voltage	V <sub>CEO</sub>	10	V
Emitter to Base Voltage	V <sub>EBO</sub>	1.5	V
Collector Current	I <sub>c</sub>	65	mA
Total Power Dissipation	P <sub>T</sub>	200	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-65 to +150	°C

PACKAGE DIMENSIONS  
in millimeters

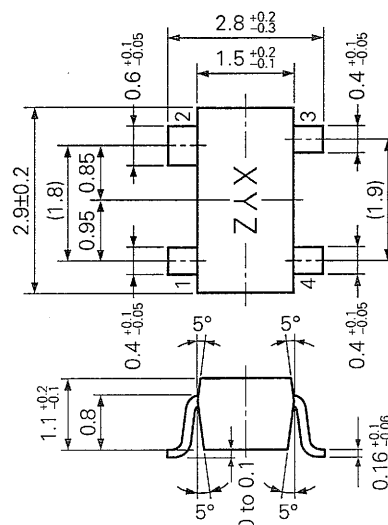

PIN CONNECTIONS

1. Emitter
2. Collector
3. Emitter
4. Base







**ELECTRICAL CHARACTERISTICS (T<sub>a</sub> = 25 °C)**


CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I <sub>CB0</sub>			1.0	μA	V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0
Emitter Cutoff Current	I <sub>EB0</sub>			1.0	μA	V <sub>EB</sub> = 1 V, I <sub>C</sub> = 0
DC Current Gain	h <sub>FE</sub>	50	100	250		V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA
Gain Bandwidth Product	f <sub>T</sub>		9		GHz	V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA, f = 1.0 GHz
Feed-Back Capacitance	C <sub>re</sub>		0.25	0.8	pF	V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0, f = 1.0 MHz
Insertion Power Gain	S <sub>21e</sub>   <sup>2</sup>	13	15		dB	V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA, f = 1.0 GHz
Maximum Available Gain	MAG		17		dB	V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA, f = 1.0 GHz
Noise Figure	NF		1.2	2.5	dB	V <sub>CE</sub> = 8 V, I <sub>C</sub> = 7 mA, f = 1.0 GHz

**h<sub>FE</sub> Classification**

Rank	EB	FB	GB
Marking	36R	37R	38R
h <sub>FE</sub>	50 to 100	80 to 160	125 to 250

TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

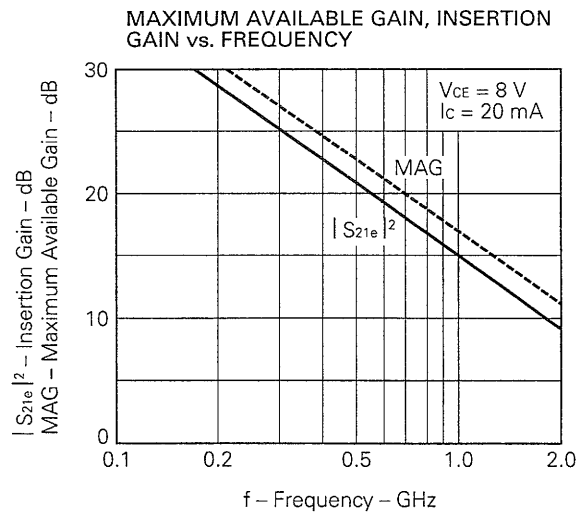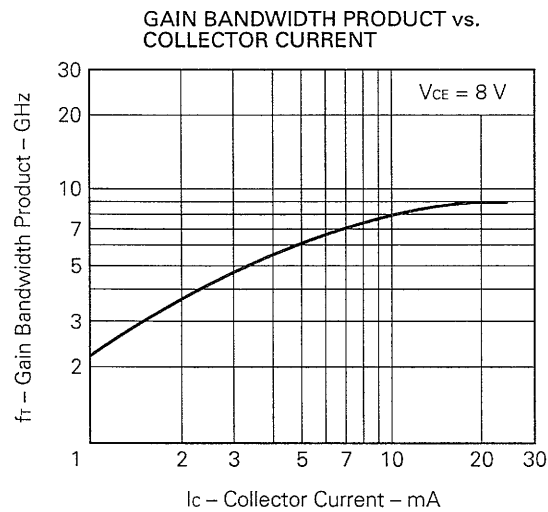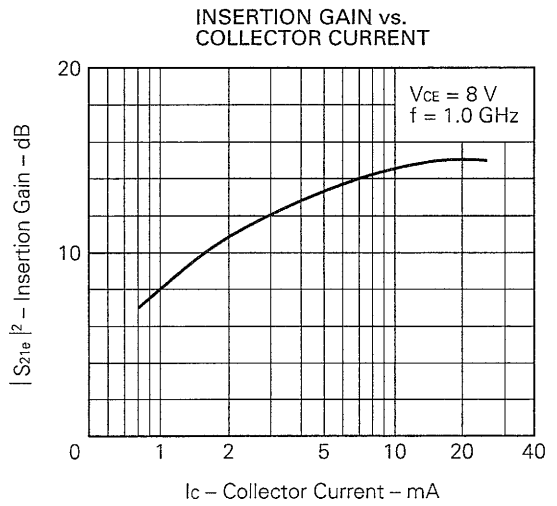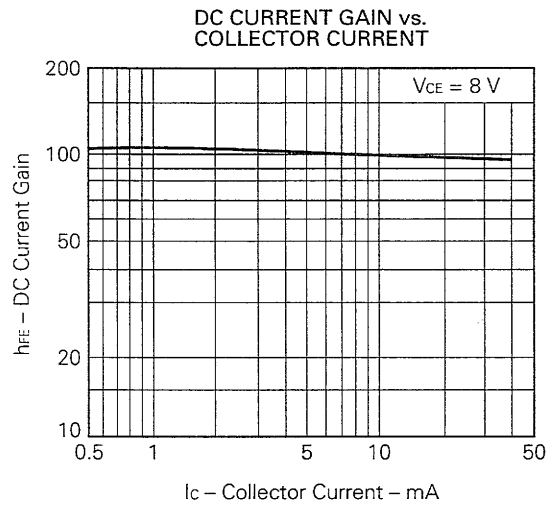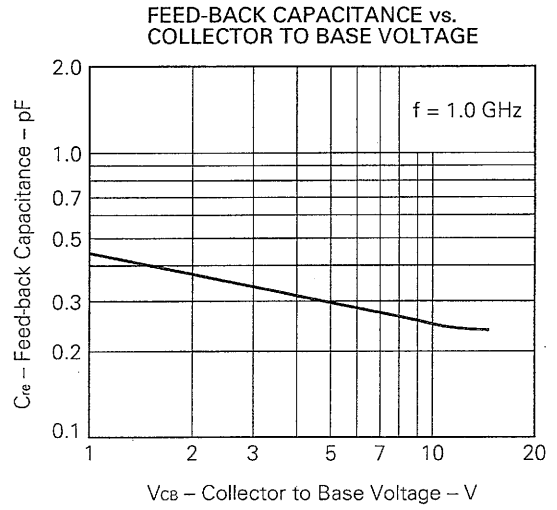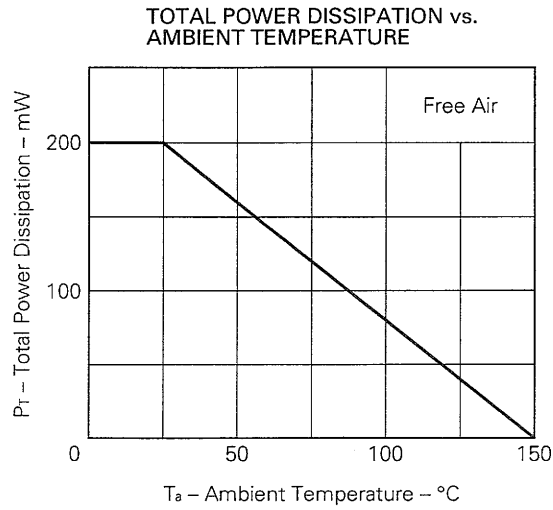

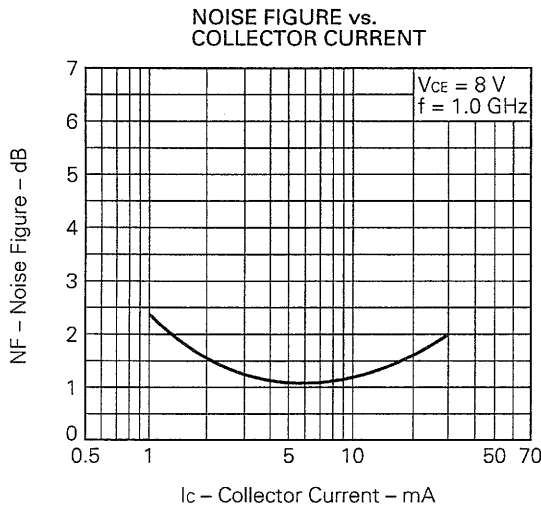

**S-PARAMETER**

V<sub>CE</sub> = 8.0 V, I<sub>c</sub> = 5.0 mA, Z<sub>o</sub> = 50 Ω


f (MHz)	S <sub>11</sub>	∠S <sub>11</sub>	S <sub>21</sub>	∠S <sub>21</sub>	S <sub>12</sub>	∠S <sub>12</sub>	S <sub>22</sub>	∠S <sub>22</sub>
200	0.774	-47.8	12.689	146.5	0.031	65.4	0.882	-19.1
400	0.631	-88.8	9.952	119.4	0.048	53.4	0.723	-29.5
600	0.523	-120.9	7.813	100.9	0.058	46.2	0.611	-33.4
800	0.460	-145.1	5.966	87.6	0.067	43.9	0.564	-34.5
1000	0.426	-166.6	4.841	76.7	0.074	43.8	0.515	-37.6
1200	0.416	178.2	4.065	68.8	0.083	43.5	0.488	-39.6
1400	0.417	163.0	3.413	60.7	0.087	41.2	0.459	-44.1
1600	0.430	152.1	3.035	54.1	0.098	42.8	0.443	-45.9
1800	0.443	142.1	2.659	48.0	0.105	40.1	0.428	-51.1
2000	0.458	136.5	2.482	44.3	0.114	43.0	0.414	-53.5

V<sub>CE</sub> = 8.0 V, I<sub>c</sub> = 20.0 mA, Z<sub>o</sub> = 50 Ω

f (MHz)	S <sub>11</sub>	∠S <sub>11</sub>	S <sub>21</sub>	∠S <sub>21</sub>	S <sub>12</sub>	∠S <sub>12</sub>	S <sub>22</sub>	∠S <sub>22</sub>
200	0.461	-89.8	23.331	121.6	0.021	60.7	0.665	-27.7
400	0.364	-135.8	13.501	99.2	0.033	61.2	0.511	-30.5
600	0.338	-163.4	9.535	86.4	0.046	61.5	0.448	-29.5
800	0.330	177.9	7.083	77.5	0.056	62.1	0.430	-29.5
1000	0.334	163.2	5.604	69.3	0.070	60.0	0.402	-32.5
1200	0.344	153.9	4.722	63.5	0.084	60.4	0.385	-34.8
1400	0.359	143.1	3.982	56.8	0.091	54.9	0.362	-39.5
1600	0.383	136.1	3.517	51.1	0.104	54.5	0.350	-42.1
1800	0.401	128.3	3.094	45.6	0.116	49.9	0.337	-47.4
2000	0.419	124.7	2.882	42.7	0.127	50.8	0.323	-50.5


S-PARAMETER

S<sub>11e</sub>, S<sub>22e</sub> – FREQUENCY CONDITION V<sub>CE</sub> = 8 V, I<sub>C</sub> = 20/5 mA, freq. = 0.2 to 2 GHz (Step 200 MHz)

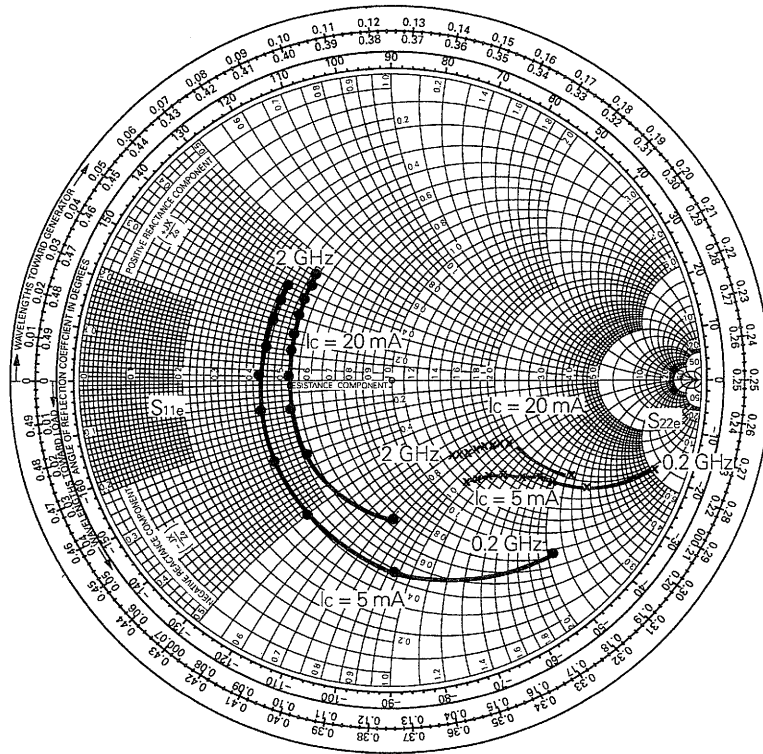


S<sub>21e</sub> – FREQUENCY

CONDITION V<sub>CE</sub> = 8 V  
I<sub>C</sub> = 20/5 mA  
freq. = 0.2 to 2 GHz (Step 200 MHz)

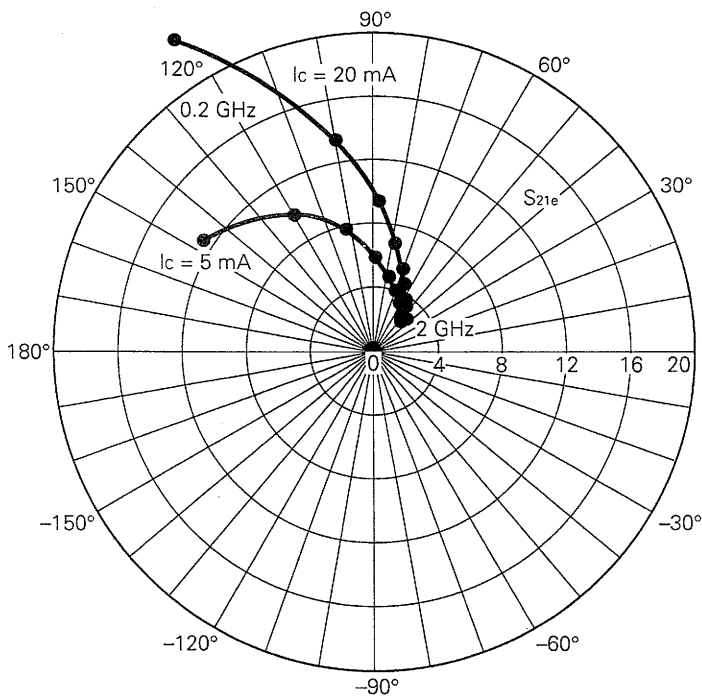

S<sub>12e</sub> – FREQUENCY

CONDITION V<sub>CE</sub> = 8 V  
I<sub>C</sub> = 20/5 mA  
freq. = 0.2 to 2 GHz (Step 200 MHz)

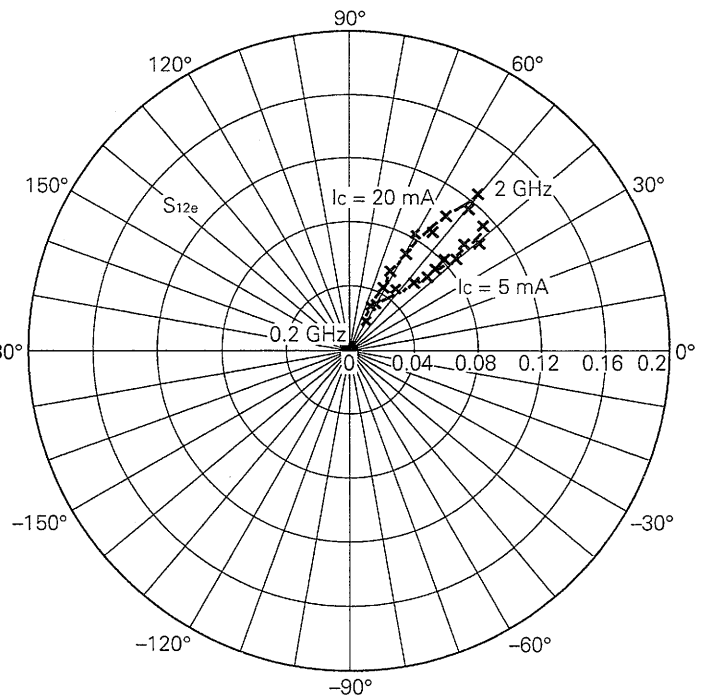

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

The devices listed in this document are not suitable for use in aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. If customers intend to use NEC devices for above applications or they intend to use "Standard" quality grade NEC devices for applications not intended by NEC, please contact our sales people in advance.

Application examples recommended by NEC Corporation.

Standard: Computer, Office equipment, Communication equipment, Test and Measurement equipment, Machine tools, Industrial robots, Audio and Visual equipment, Other consumer products, etc.

Special: Automotive and Transportation equipment, Traffic control systems, Antidisaster systems, Anticrime systems, etc.