


VHF Power Transistor

The SD1460 is a 28V VHF Transistor designed primarily to be used in FM broadcast applications in class A,B or C modes of operation. The device utilizes gold top and back metal, and incorporates emitter resistors for improved ruggedness.

- 108MHz
- 150 Watt Pout
- 28V Supply
- 10dB Gain
- Gold Metallization
- Diffused Emitter Ballast Resistors for Ruggedness

SD1460

**150 W – 108MHz
VHF POWER
TRANSISOTR**



.500 SOE F

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	25	V
Collector-Base Voltage	V_{CBO}	60	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current - Continuous	I_C	16	A
Total Device Dissipation ($T_C=25C$)	P_D	150	Watts
Derate above 70C		1	W/C
Operating Junction Temperature	T_J	200	C
Storage Temperature Range	T_{stg}	-65 to +200	C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case ($T_C=70C$)	$R_{\theta JA}$	1	C/W

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ($I_C = 100mA, I_B=0$)	$V^{(BR)}_{CEO}$	25			V
Collector-Base Breakdown Voltage ($I_C=100mA, I_E=0$)	$V^{(BR)}_{CBO}$	60			V
Emitter-Base Breakdown Voltage ($I_E=20mA, I_C=0$)	$V^{(BR)}_{EBO}$	3.0			V
Collector-Emitter Breakdown Voltage ($I_C=100mA, R_{BE}=10 \text{ Ohms}$)	$V^{(BR)}_{CER}$	55			V

ON CHARACTERISTICS



DC Current Gain ($I_C= 1A, V_{CE} = 5V$)	h_{FE}	20		150	
--	----------	----	--	-----	--

DYNAMIC CHARACTERISTICS

Output Capacitance ($V_{CB} = 28V, I_E=0, f=1 \text{ MHz}$)	C_{ob}	---	---	150	pF
---	----------	-----	-----	-----	----

DYNAMIC CHARACTERISTICS cont.

Characteristic	Symbol	Min	Typ	Max	Unit
Common-Emitter Amplifier Gain ($V_{CE}=28V$, $P_{out}=150W$, $f=108MHz$)	C_{ob}	9.2			dB
Collector Efficiency ($V_{CE} = 28V$, $P_{out}=150W$, $f=108MHz$)	Eff	70	75		%
LOAD Mismatch ($V_{CE}=28V$, $P_{out}=150W$, $f=108MHz$) Load VSWR = 4:1, all Phase Angles		No Degradation in Output Power			

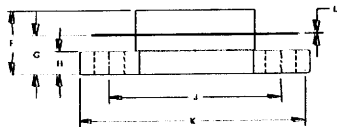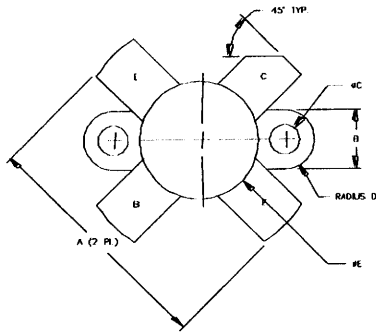

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	1.000 / 25.4 MINIMUM	
R	0.245 / 6.22	0.255 / 6.48
C	0.120 / 3.05	0.130 / 3.30
D	0.245 / 6.22	0.255 / 6.48
E	0.485 / 12.57	0.505 / 12.83
F	0.500 / 1.63 MAXIMUM	
G	0.155 / 3.94	0.175 / 4.45
H	0.097 / 2.54	0.107 / 2.78
J	0.720 / 18.29	0.730 / 18.54
K	0.970 / 24.64	0.980 / 24.89
L	0.004 / 0.102	0.006 / 0.152

