




## N-Channel 60-V (D-S) MOSFET

PRODUCT SUMMARY		
$V_{DS}$ (V)	$r_{DS(on)}$ ( $\Omega$ )	$I_D$ (A)
60	0.16 @ $V_{GS} = 10$ V	$\pm 2.0$
	0.22 @ $V_{GS} = 4.5$ V	$\pm 1.7$

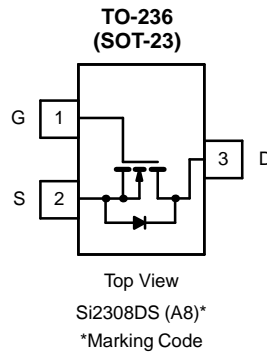

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)			
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	60	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	
Continuous Drain Current ( $T_J = 150^\circ\text{C}$ ) <sup>a</sup>	$T_A = 25^\circ\text{C}$	$\pm 2.0$	A
	$T_A = 70^\circ\text{C}$	$\pm 1.6$	
Pulsed Drain Current <sup>b</sup>	$I_{DM}$	$\pm 10$	
Continuous Source Current (Diode Conduction) <sup>a</sup>	$I_S$	1.0	
Maximum Power Dissipation <sup>a</sup>	$T_A = 25^\circ\text{C}$	1.25	W
	$T_A = 70^\circ\text{C}$	0.80	
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS			
Parameter	Symbol	Maximum	Unit
Maximum Junction-to-Ambient <sup>a</sup>	$R_{thJA}$	100	$^\circ\text{C/W}$
Maximum Junction-to-Ambient <sup>c</sup>		166	

**Notes**

- a. Surface Mounted on FR4 Board,  $t = \leq 5$  sec.
- b. Pulse width limited by maximum junction temperature.
- c. Surface Mounted on FR4 Board

For SPICE model information via the Worldwide Web: <http://www.vishay.com/www/product/spice.htm>









<b>SPECIFICATIONS (T<sub>J</sub> = 25 °C UNLESS OTHERWISE NOTED)</b>						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>DS</sub> = 0 V, I <sub>D</sub> = 250 μA	60			V
Gate-Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA	1.5			
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 60 V, V <sub>GS</sub> = 0 V			0.5	μA
		V <sub>DS</sub> = 60 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 55 °C			10	
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>DS</sub> ≥ 4.5 V, V <sub>GS</sub> = 10 V	6			A
		V <sub>DS</sub> ≥ 4.5 V, V <sub>GS</sub> = 4.5 V	4			
Drain-Source On-State Resistance <sup>a</sup>	r <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 2.0 A		0.125	0.16	Ω
		V <sub>GS</sub> = 4.5 V, I <sub>D</sub> = 1.7 A		0.155	0.22	
Forward Transconductance <sup>a</sup>	g <sub>fs</sub>	V <sub>DS</sub> = 4.5 V, I <sub>D</sub> = 2.0 A		4.6		S
Diode Forward Voltage <sup>a</sup>	V <sub>SD</sub>	I <sub>S</sub> = 1 A, V <sub>GS</sub> = 0 V		0.77	1.2	V
<b>Dynamic</b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 10 V, I <sub>D</sub> = 2.0 A		4.8	10	nC
Gate-Source Charge	Q <sub>gs</sub>			0.8		
Gate-Drain Charge	Q <sub>gd</sub>			1.0		
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> = 25 V, V <sub>GS</sub> = 0 V, f = 1 MHz		240		pF
Output Capacitance	C <sub>oss</sub>			50		
Reverse Transfer Capacitance	C <sub>rss</sub>			15		
<b>Switching</b>						
Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> = 30 V, R <sub>L</sub> = 30 Ω I <sub>D</sub> ≅ 1 A, V <sub>GEN</sub> = 4.5 V, R <sub>G</sub> = 6 Ω		7	15	ns
Rise Time	t <sub>r</sub>			10	20	
Turn-Off Delay Time	t <sub>d(off)</sub>			17	35	
Fall Time	t <sub>f</sub>			6	15	

**Notes**

a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.



**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

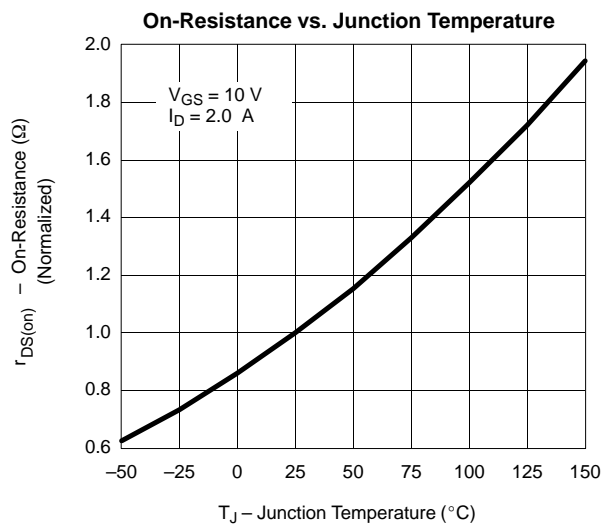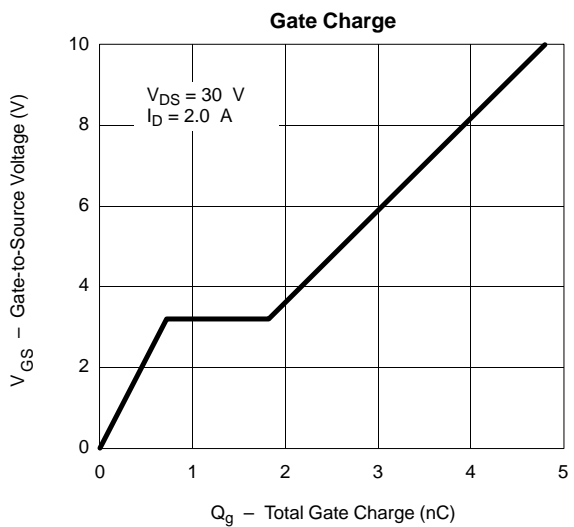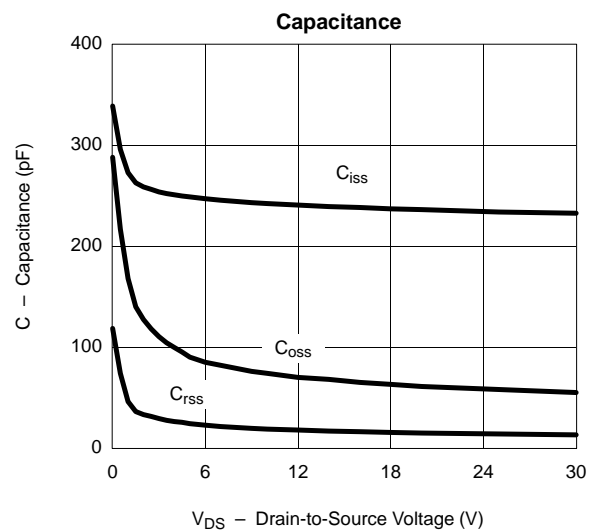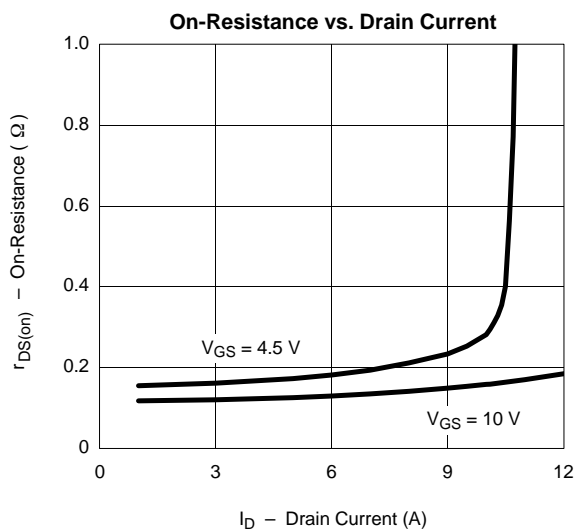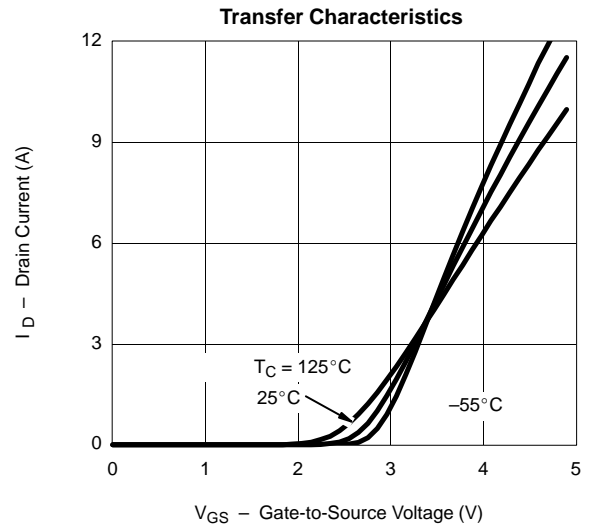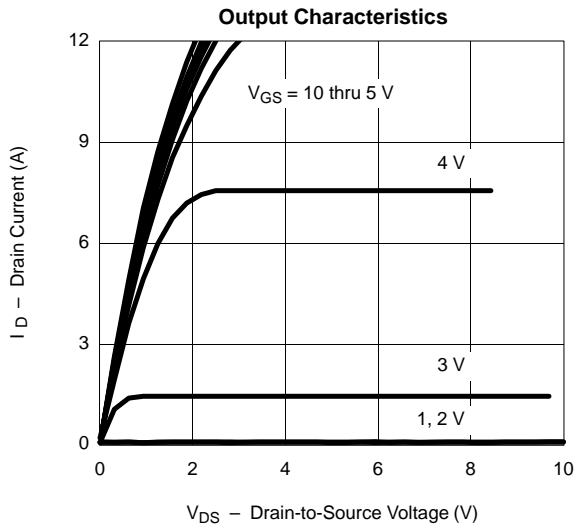



**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

