
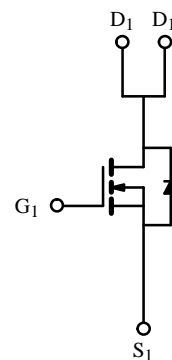



Dual Enhancement-Mode MOSFET (N- and P-Channel)

Product Summary

	V _{DS} (V)	r _{DS(on)} (Ω)	I _D (A)
N-Channel	30	0.037 @ V _{GS} = 10 V	± 5.8
		0.055 @ V _{GS} = 4.5 V	± 4.7
P-Channel	-30	0.053 @ V _{GS} = -10 V	± 4.9
		0.095 @ V _{GS} = -4.5 V	± 3.6

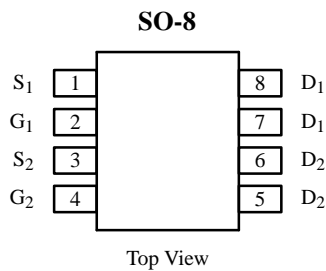

N-Channel MOSFET

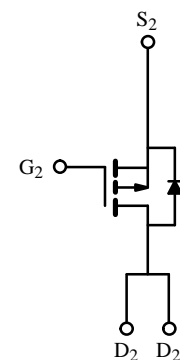

P-Channel MOSFET

Absolute Maximum Ratings (T_A = 25° C Unless Otherwise Noted)

Parameter	Symbol	N-Channel	P-Channel	Unit
Drain-Source Voltage	V _{DS}	30	-30	V
Gate-Source Voltage	V _{GS}	± 20	± 20	
Continuous Drain Current (T _J = 150°C) ^a	I _D	T _A = 25°C	± 5.8	A
		T _A = 70°C	± 4.6	
Pulsed Drain Current	I _{DM}	± 30	± 30	A
Continuous Source Current (Diode Conduction) ^a	I _S	1.7	-1.7	
Maximum Power Dissipation ^a	P _D	T _A = 25°C	2.0	W
		T _A = 70°C	1.3	
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55 to 150		°C

Thermal Resistance Ratings

Parameter	Symbol	N- or P-Channel	Unit
Maximum Junction-to-Ambient ^a	R _{thJA}	62.5	°C/W

Notes

a. Surface Mounted on FR4 Board, t ≤ 10 sec.

Subsequent updates to this data sheet may be obtained via facsimile by calling Siliconix FaxBack, 1-408-970-5600. Please request FaxBack document #1234. A SPICE Model data sheet is available for this product (FaxBack document #5150).

Specifications ($T_J = 25^\circ\text{C}$ Unless Otherwise Noted)







Parameter	Symbol	Test Condition	Min	Typ ^a	Max	Unit	
Static							
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$	N-Ch	1.0		V	
		$V_{DS} = V_{GS}, I_D = -250 \mu\text{A}$	P-Ch	-1.0			
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$	N-Ch		± 100	nA	
			P-Ch		± 100		
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 30 \text{ V}, V_{GS} = 0 \text{ V}$	N-Ch		1	μA	
		$V_{DS} = -30 \text{ V}, V_{GS} = 0 \text{ V}$	P-Ch		-1		
		$V_{DS} = 30 \text{ V}, V_{GS} = 0 \text{ V}, T_J = 55^\circ\text{C}$	N-Ch		25		
		$V_{DS} = -30 \text{ V}, V_{GS} = 0 \text{ V}, T_J = 55^\circ\text{C}$	P-Ch		-25		
On-State Drain Current ^b	$I_{D(on)}$	$V_{DS} \geq 5 \text{ V}, V_{GS} = 10 \text{ V}$	N-Ch	20		A	
		$V_{DS} \leq -5 \text{ V}, V_{GS} = -10 \text{ V}$	P-Ch	-20			
Drain-Source On-State Resistance ^b	$r_{DS(on)}$	$V_{GS} = 10 \text{ V}, I_D = 5.8 \text{ A}$	N-Ch		0.030	0.037	Ω
		$V_{GS} = -10 \text{ V}, I_D = -4.9 \text{ A}$	P-Ch		0.043	0.053	
		$V_{GS} = 4.5 \text{ V}, I_D = 4.7 \text{ A}$	N-Ch		0.042	0.055	
		$V_{GS} = -4.5 \text{ V}, I_D = -3.6 \text{ A}$	P-Ch		0.070	0.095	
Forward Transconductance ^b	g_{fs}	$V_{DS} = 15 \text{ V}, I_D = 5.8 \text{ A}$	N-Ch		13	S	
		$V_{DS} = -15 \text{ V}, I_D = -4.9 \text{ A}$	P-Ch		10		
Diode Forward Voltage ^b	V_{SD}	$I_S = 1.7 \text{ A}, V_{GS} = 0 \text{ V}$	N-Ch		0.8	1.2	V
		$I_S = -1.7 \text{ A}, V_{GS} = 0 \text{ V}$	P-Ch		-0.8	-1.2	
Dynamic^a							
Total Gate Charge	Q_g	N-Channel $V_{DS} = 15 \text{ V}, V_{GS} = 10 \text{ V}, I_D = 5.8 \text{ A}$ P-Channel $V_{DS} = -15 \text{ V}, V_{GS} = -10 \text{ V}, I_D = -4.9 \text{ A}$	N-Ch		18	25	nC
Gate-Source Charge	Q_{gs}		P-Ch		16	25	
			N-Ch		4.5		
Gate-Drain Charge	Q_{gd}		P-Ch		5		
			N-Ch		2.5		
Turn-On Delay Time	$t_{d(on)}$		P-Ch		2		
		N-Ch		10	16		
Rise Time	t_r	P-Ch		9	15		
		N-Ch		20	16		
Turn-Off Delay Time	$t_{d(off)}$	P-Ch		13	20		
		N-Ch		27	40		
Fall Time	t_f	P-Ch		25	40		
		N-Ch		24	35		
Source-Drain Reverse Recovery Time	t_{rr}	$I_F = 1.7 \text{ A}, di/dt = 100 \text{ A}/\mu\text{s}$	N-Ch		45	80	ns
		$I_F = -1.7 \text{ A}, di/dt = 100 \text{ A}/\mu\text{s}$	P-Ch		60	90	

Notes

- a. For design aid only; not subject to production testing.
 b. Pulse test; pulse width $\leq 300 \mu\text{s}$, duty cycle $\leq 2\%$.






Typical Characteristics (25°C Unless Noted)

N-Channel

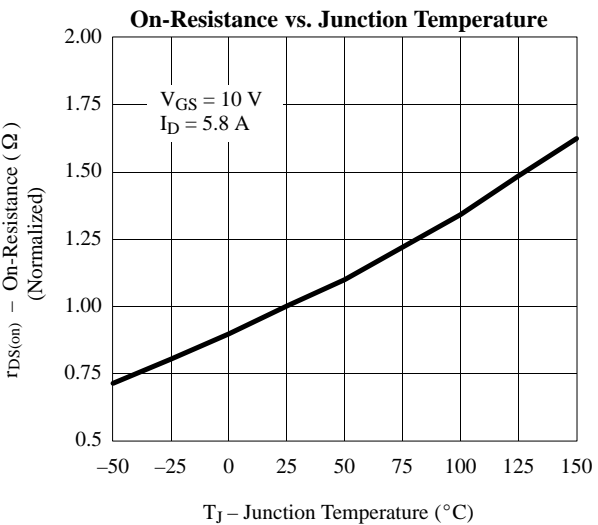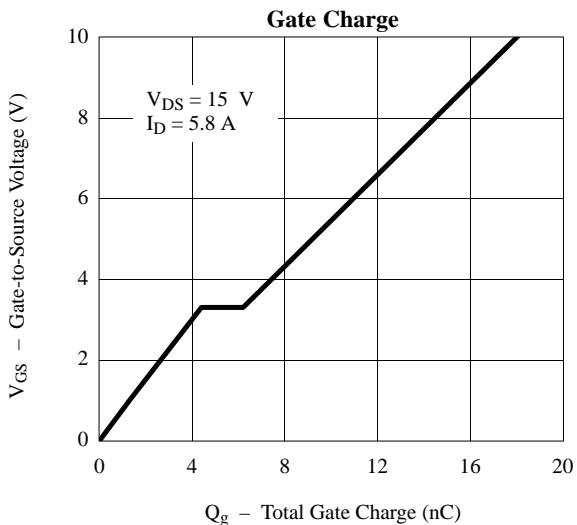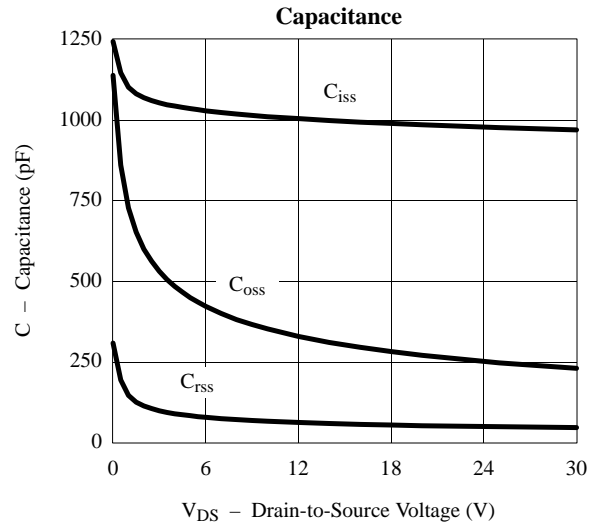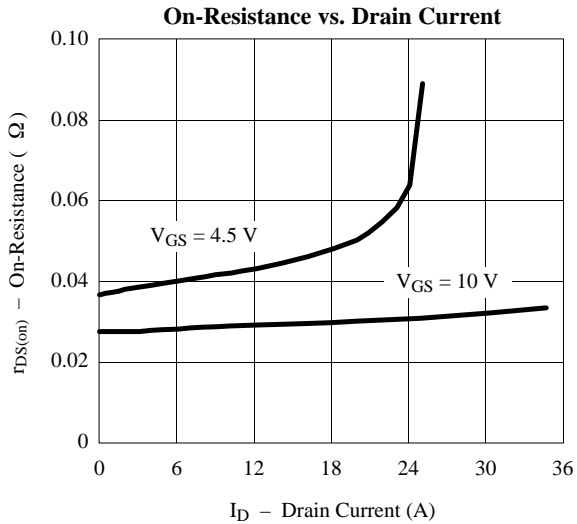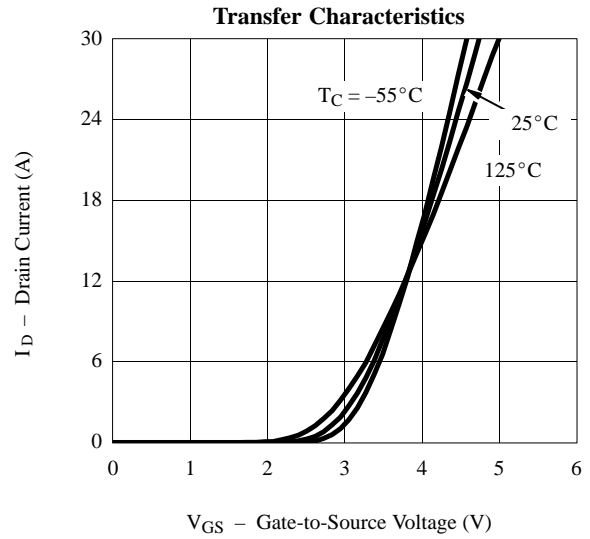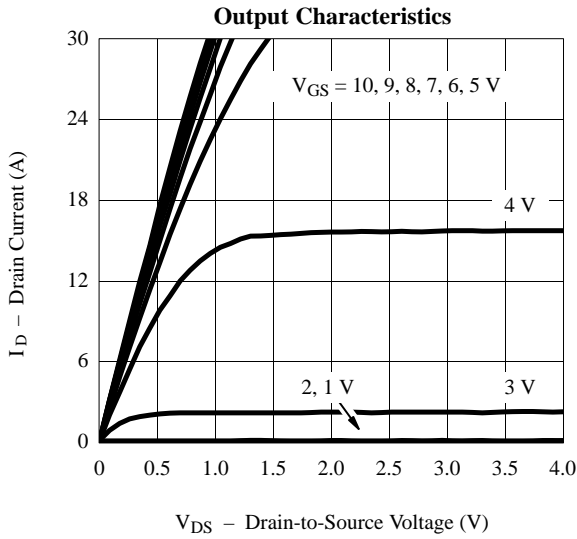







Typical Characteristics (25°C Unless Noted)

N-Channel

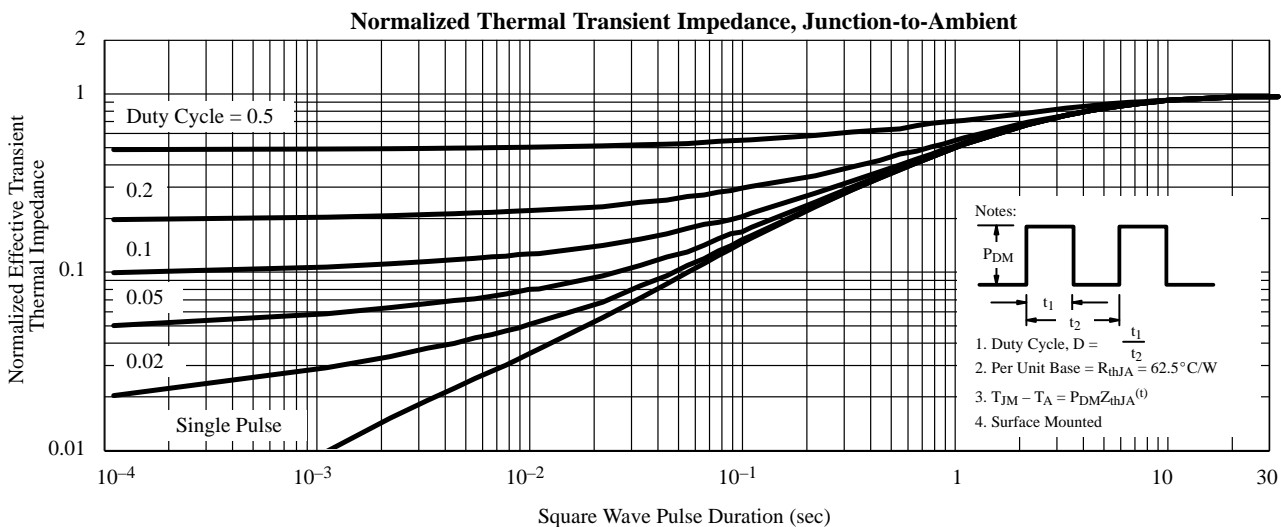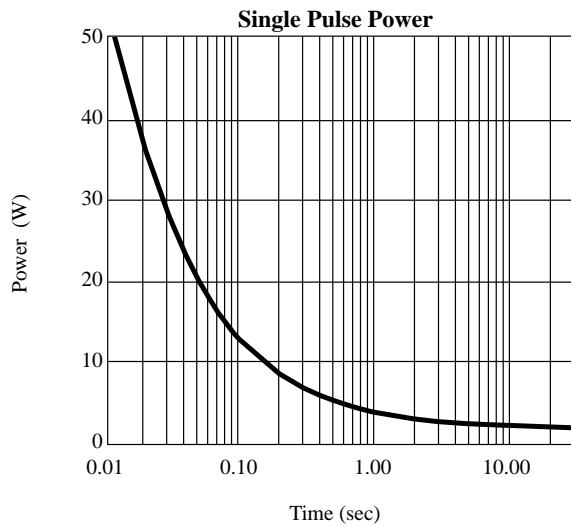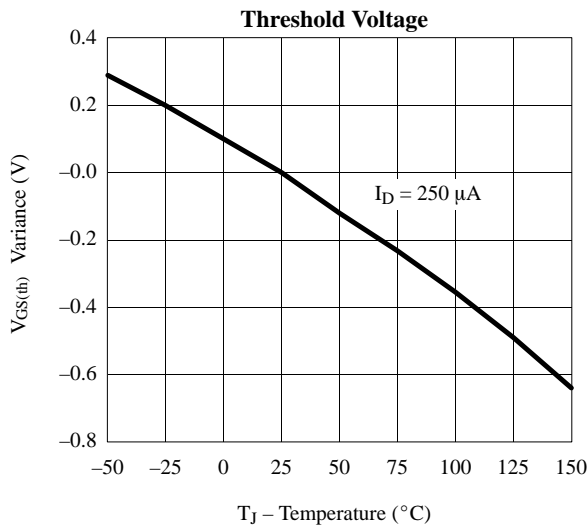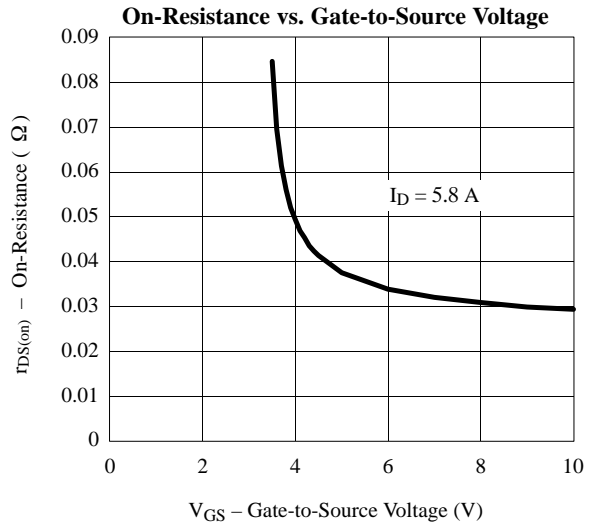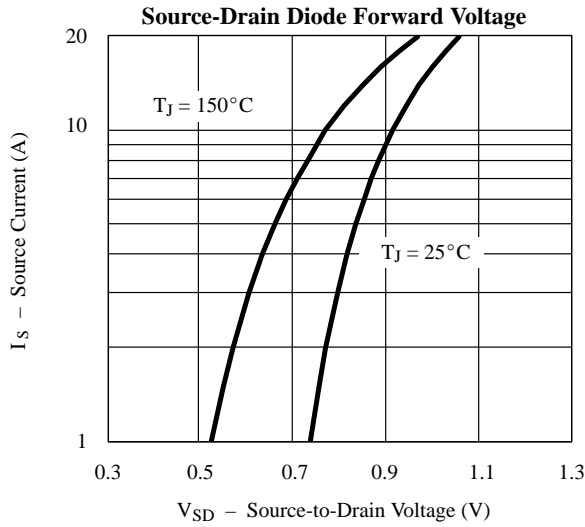

Typical Characteristics (25°C Unless Noted)

P-Channel

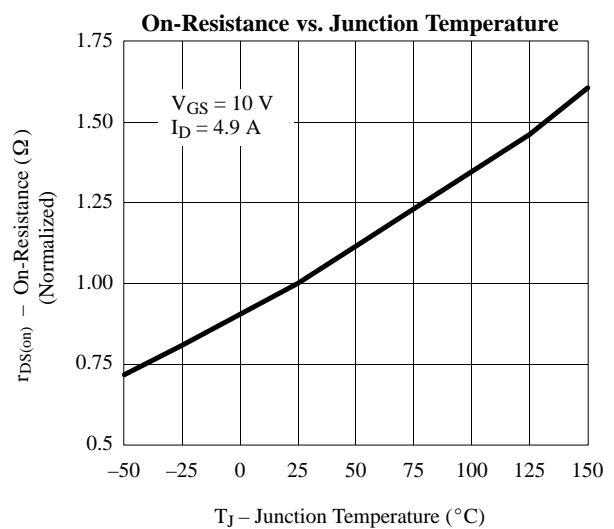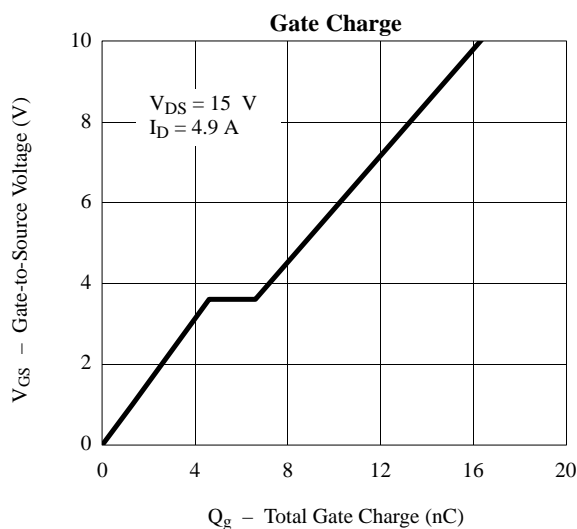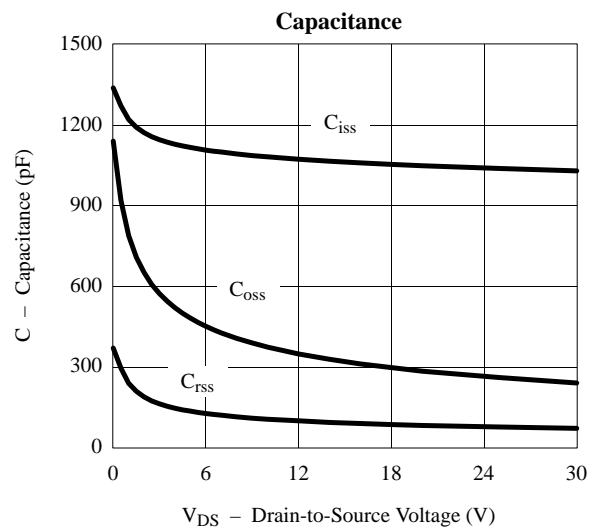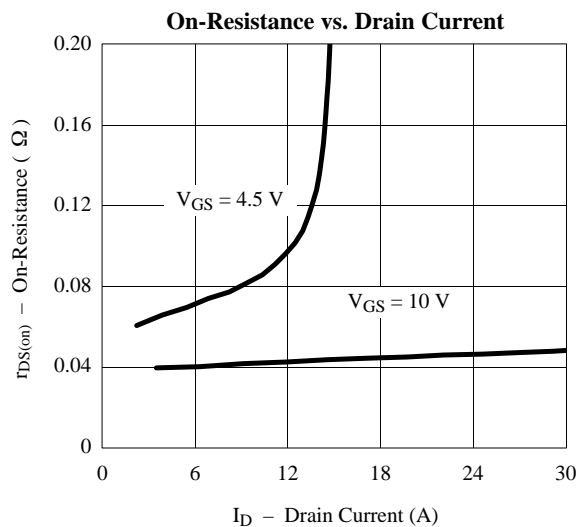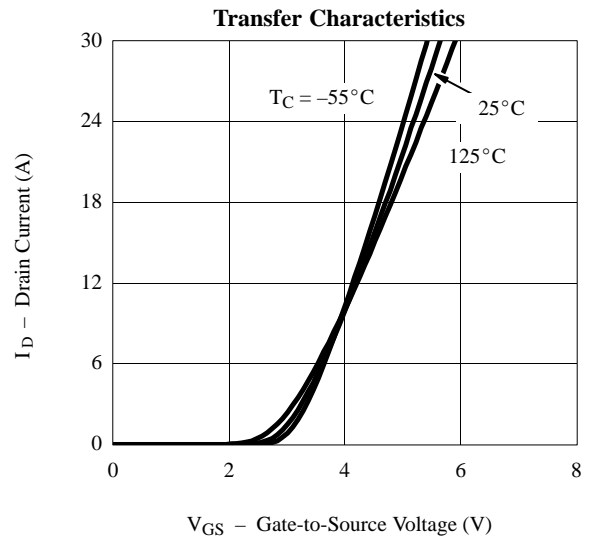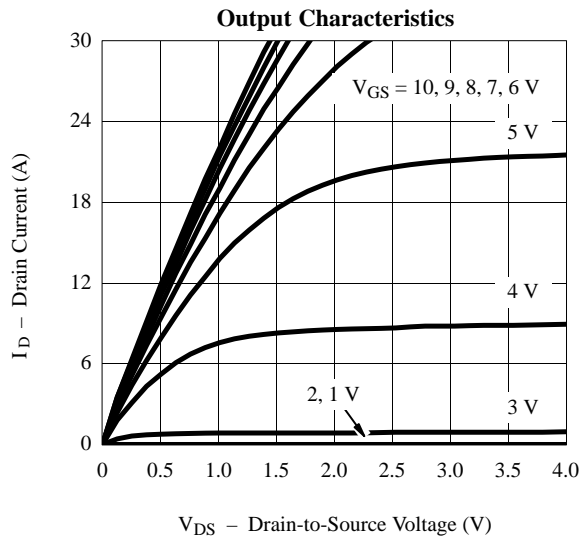

Typical Characteristics (25°C Unless Noted)

P-Channel

