


TRIACS

- GLASS PASSIVATED CHIP
- EXCELLENT $(dv/dt)_c > 5 \text{ V}/\mu\text{s}$
- I_{GT} SPECIFIED IN FOUR QUADRANTS
- AVAILABLE IN INSULATED VERSION → BTA SERIES (INSULATING VOLTAGE 2500 V_{RMS}) OR IN UNINSULATED VERSION → BTB SERIES
- UL RECOGNIZED FOR BTA SERIES (E81734)

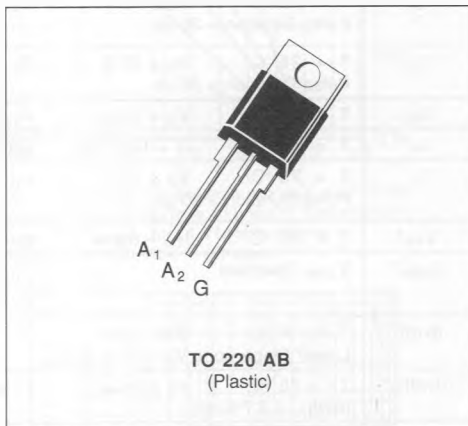

DESCRIPTION

New range suited for applications such as phase control and static switching.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
$I_{T(RMS)}$	RMS on-state Current (360° conduction angle) $T_C = 75^\circ\text{C}$	6	A
I_{TSM}	Non Repetitive Surge Peak on-state Current (T_j initial = 25°C - Half sine wave)	$t = 8.3 \text{ ms}$	A
		$t = 10 \text{ ms}$	
I^2t	I^2t Value for Fusing	$t = 10 \text{ ms}$	A^2s
di/dt	Critical Rate of Rise of on-state Current (1)	Repetitive $F = 50 \text{ Hz}$	$\text{A}/\mu\text{s}$
		Non Repetitive	
T_{stg} T_j	Storage and Operating Junction Temperature Range	- 40 to 150 - 40 to 110	$^\circ\text{C}$ $^\circ\text{C}$

Symbol	Parameter	BTA/BTB 06-					Unit
		200C	400C	600C	700C	800C	
V_{DRM}	Repetitive Peak off-state Voltage (2)	200	400	600	700	800	V

(1) $I_G = 500 \text{ mA}$ $di_G/dt = 1 \text{ A}/\mu\text{s}$

(2) $T_j = 110^\circ\text{C}$.

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to Ambient	60	$^\circ\text{C}/\text{W}$
$R_{th(j-c)} \text{ DC}$	Junction to Case for DC	6.1	$^\circ\text{C}/\text{W}$
$R_{th(j-c)} \text{ AC}$	Junction to Case for 360° Conduction Angle ($F = 50 \text{ Hz}$)	4.6	$^\circ\text{C}/\text{W}$

GATE CHARACTERISTICS (maximum values)

$P_{GM} = 40\text{ W}$ ($t_p = 10\text{ }\mu\text{s}$) $I_{GM} = 4\text{ A}$ ($t_p = 10\text{ }\mu\text{s}$)
 $P_{G(AV)} = 1\text{ W}$ $V_{GM} = 16\text{ V}$ ($t_p = 10\text{ }\mu\text{s}$)


ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions			Quadrants	Min.	Typ.	Max.	Unit
I_{GT}	$T_J = 25\text{ }^{\circ}\text{C}$ Pulse Duration $> 20\text{ }\mu\text{s}$	$V_D = 12\text{ V}$	$R_L = 33\text{ }\Omega$	I-II-III			25	mA
				IV			50	
V_{GT}	$T_J = 25\text{ }^{\circ}\text{C}$ Pulse Duration $> 20\text{ }\mu\text{s}$	$V_D = 12\text{ V}$	$R_L = 33\text{ }\Omega$	I-II-III-IV			1.5	V
V_{GD}	$T_J = 110\text{ }^{\circ}\text{C}$	$V_D = V_{DRM}$	$R_L = 3.3\text{ k}\Omega$	I-II-III-IV	0.2			V
I_{H^*}	$T_J = 25\text{ }^{\circ}\text{C}$	$I_T = 100\text{ mA}$	Gate Open				25	mA
I_L	$T_J = 25\text{ }^{\circ}\text{C}$ Pulse Duration $> 20\text{ }\mu\text{s}$	$V_D = 12\text{ V}$	$I_G = 100\text{ mA}$	I-III-IV		50		mA
				II		100		
V_{TM}^*	$T_J = 25\text{ }^{\circ}\text{C}$	$I_{TM} = 8.5\text{ A}$	$t_p = 10\text{ ms}$				1.65	V
I_{DRM}^*	V_{DRM} Specified	$T_J = 25\text{ }^{\circ}\text{C}$					0.01	mA
		$T_J = 110\text{ }^{\circ}\text{C}$					0.5	
dv/dt^*	$T_J = 110\text{ }^{\circ}\text{C}$ Linear Slope up to $V_D = 67\% V_{DRM}$	Gate Open			100	200		V/ μs
$(dv/dt)_c^*$	$T_C = 75\text{ }^{\circ}\text{C}$ $(di/dt)_c = 2.7\text{ A/ms}$	$V_D = V_{DRM}$	$I_T = 8.5\text{ A}$		5			V/ μs
t_{gt}	$T_J = 25\text{ }^{\circ}\text{C}$ $I_G = 80\text{ mA}$	$V_D = V_{DRM}$ $di_G/dt = 1\text{ A}/\mu\text{s}$	$I_T = 8.5\text{ A}$	I-II-III-IV		2		μs

* For either polarity of electrode A_2 voltage with reference to electrode A_1 .

PACKAGE MECHANICAL DATA

TO 220 AB Plastic

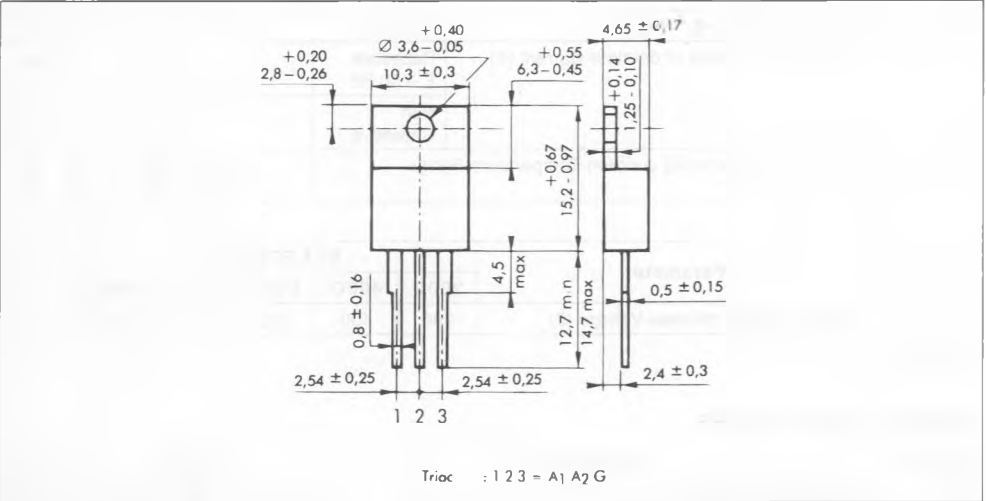

Cooling method : by conduction (method C)
 Marking : type number
 Weight : 2 g.

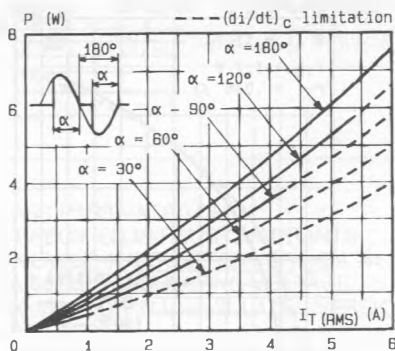


Fig.1 - Maximum mean power dissipation versus RMS on-state current ($F = 60$ Hz).

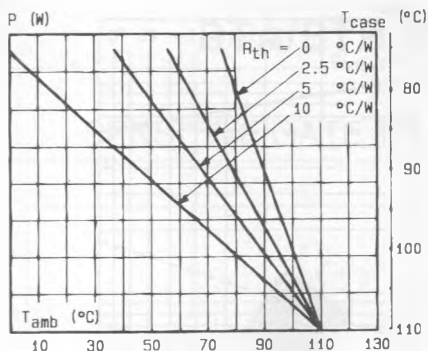


Fig.2 - Correlation between maximum mean power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact.

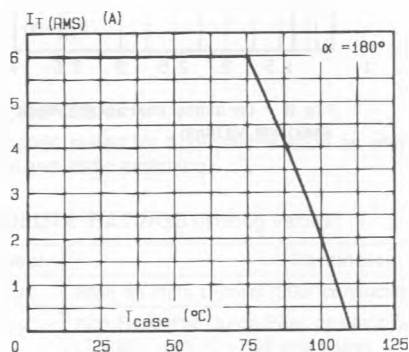


Fig.3 - RMS on-state current versus case temperature.

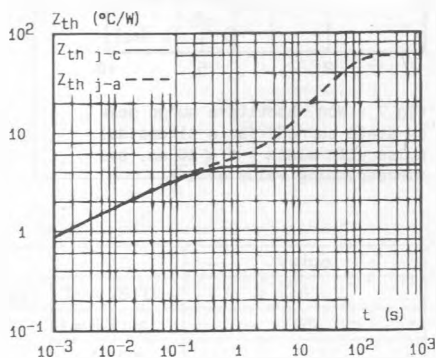


Fig.4 - Thermal transient impedance junction to case and junction to ambient versus pulse duration.

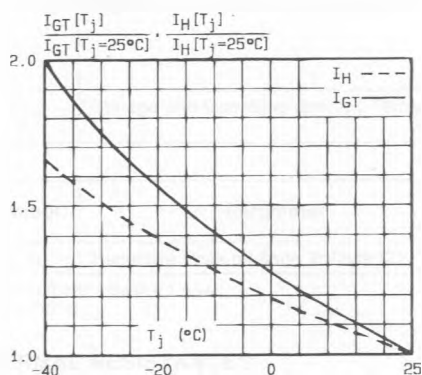


Fig.5 - Relative variation of gate trigger current and holding current versus junction temperature.

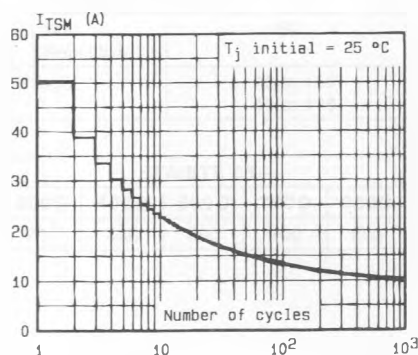


Fig.6 - Non repetitive surge peak on-state current versus number of cycles.

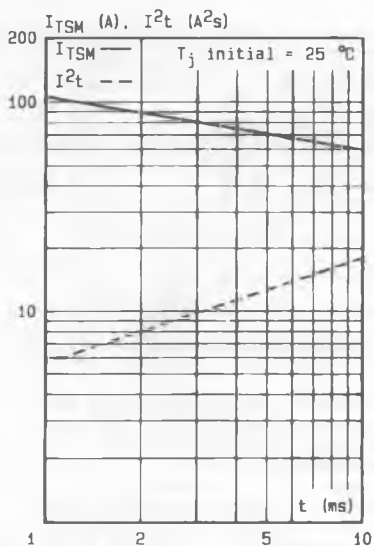


Fig. 7 - Non repetitive surge peak on-state current for a sinusoidal pulse with width: $t \leq 10$ ms, and corresponding value of I^2t .

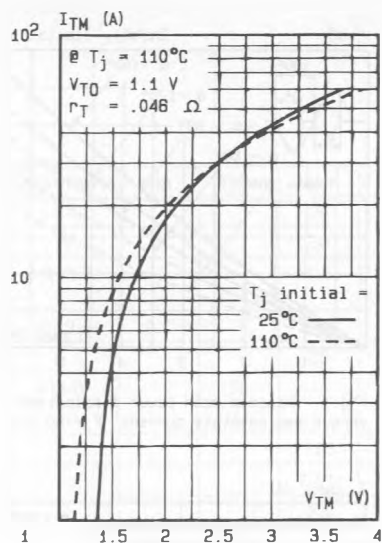


Fig. 8 - On-state characteristics (maximum values).