


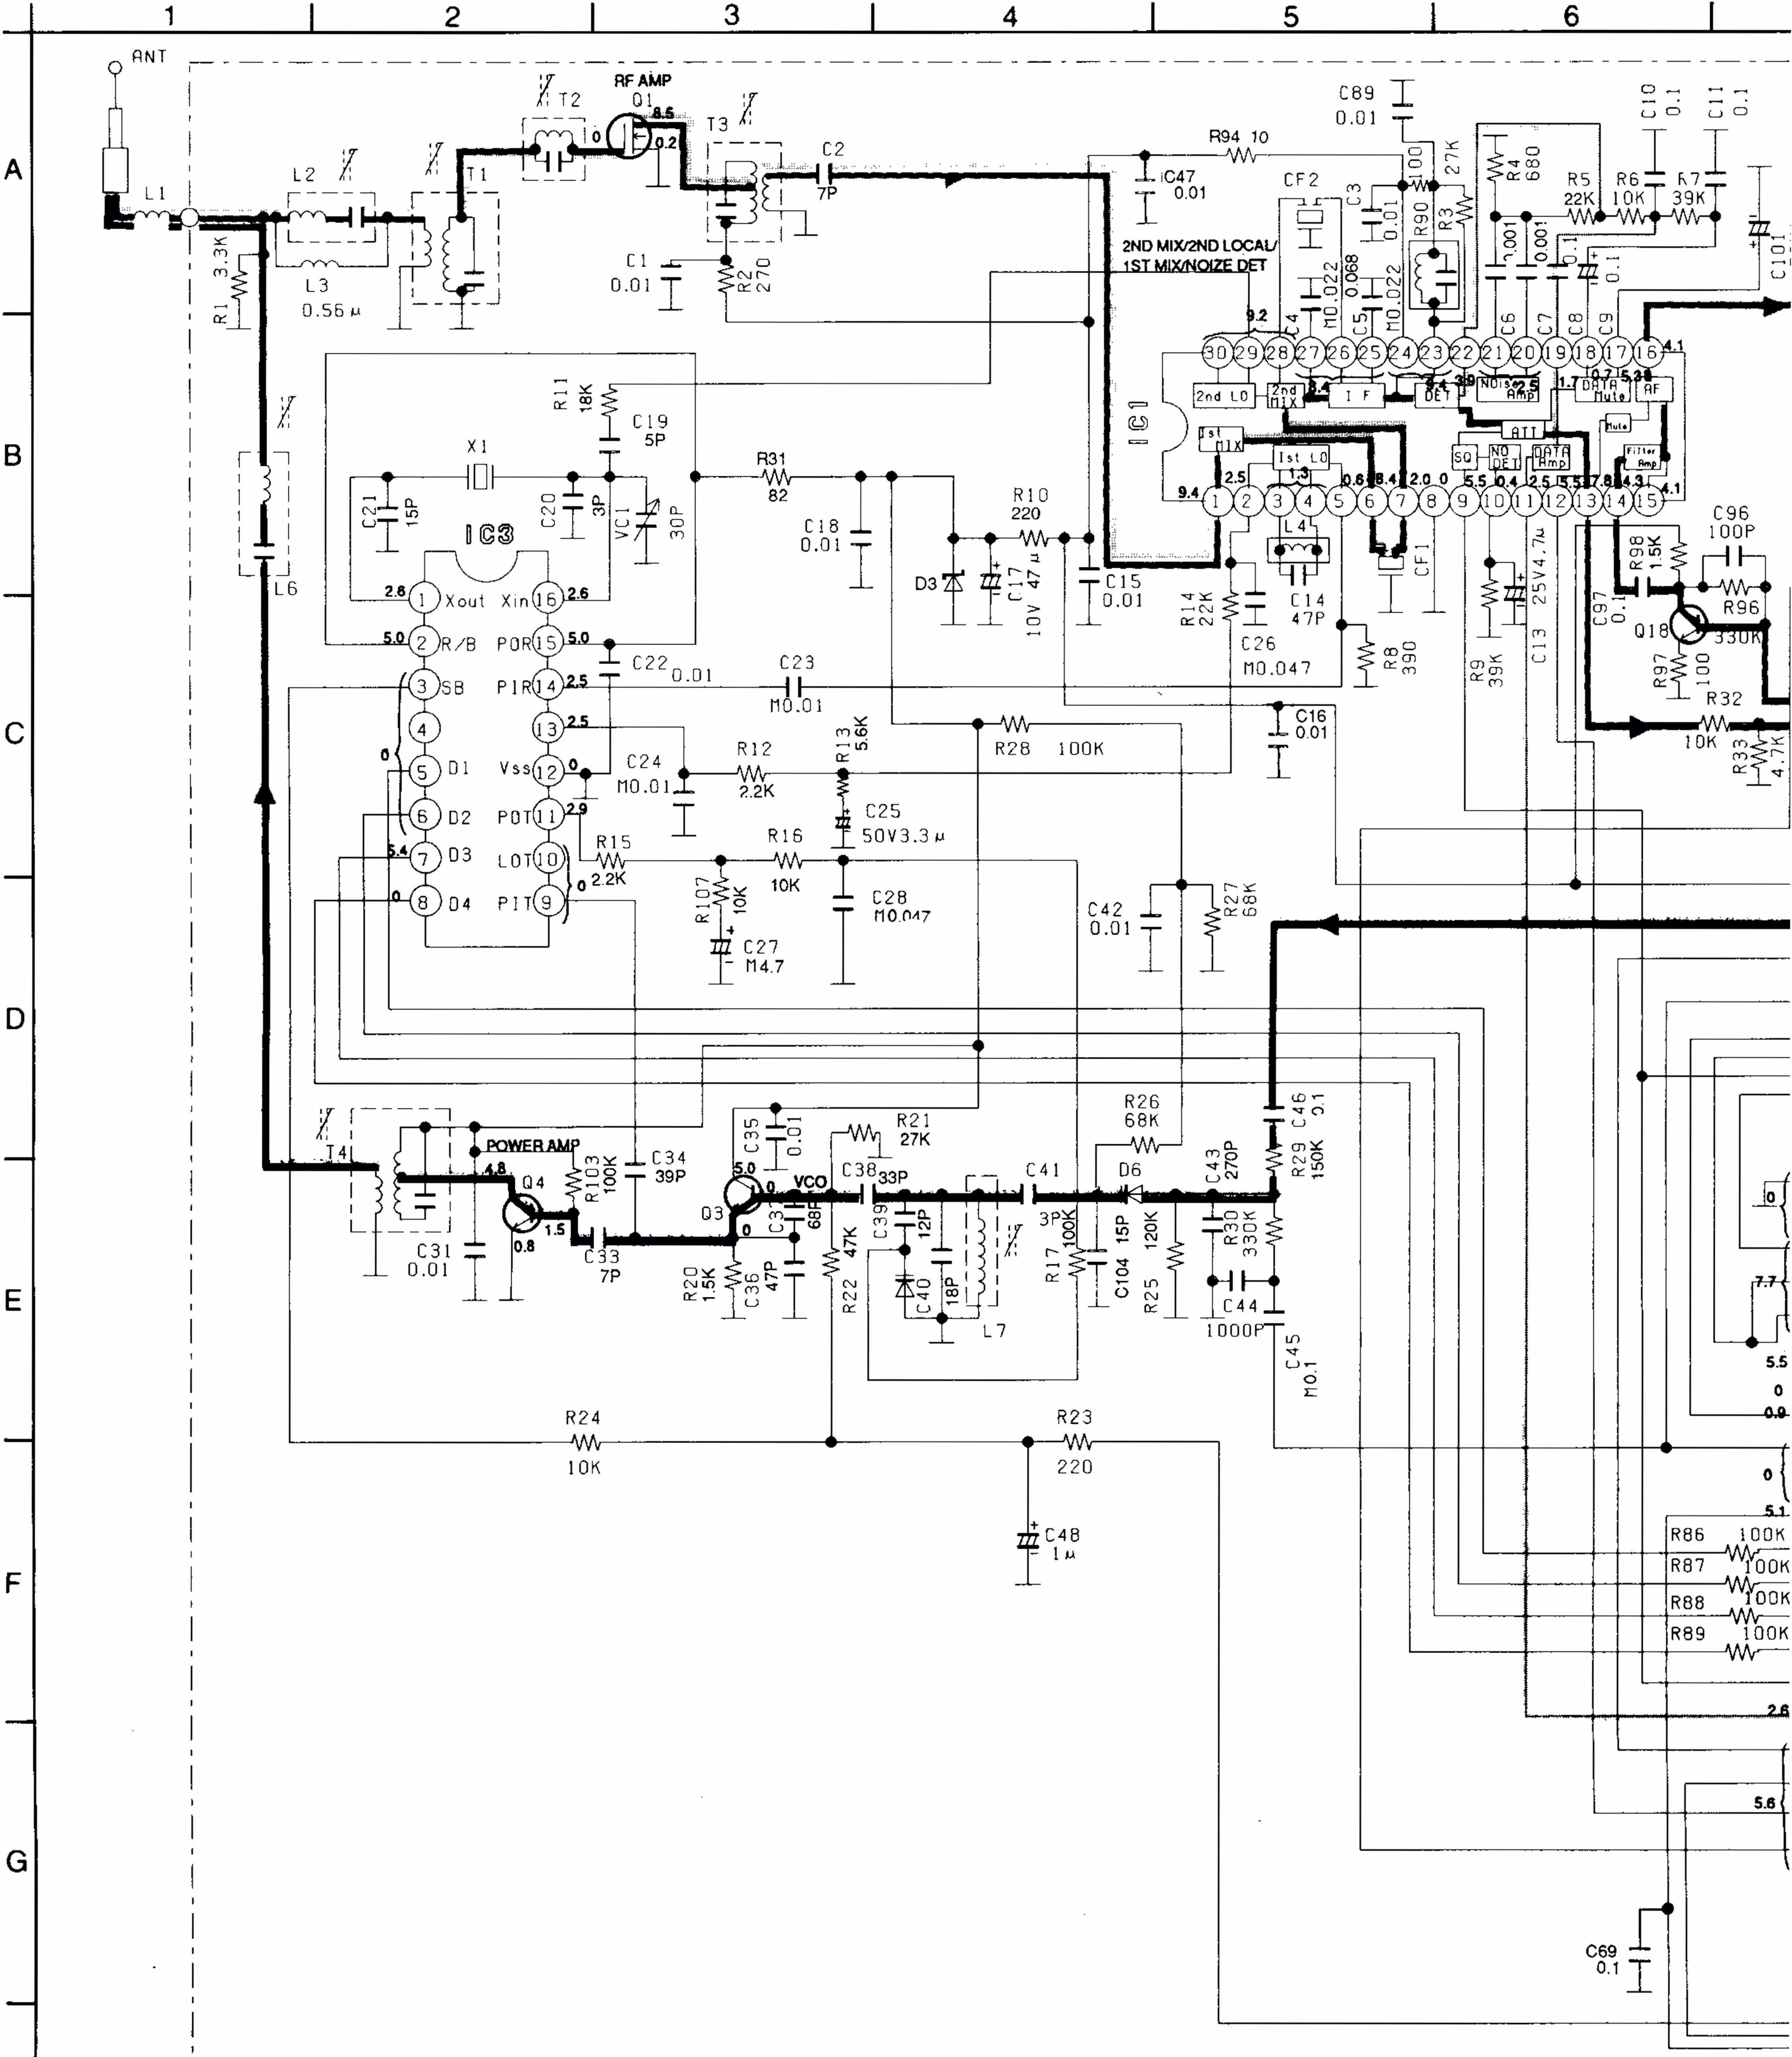


Notes:

1. S1: Code Selector switch in "A" position.
2. S2: Dialing mode selector in "TONE" position.
3. S3: Page switch in "OFF" position.
4. DC voltage measurements are taken with an electronic voltmeter from the negative voltage line. STANDBY position

Important Safety Notice

The shaded area on this schematic diagram incorporates special features important for protection fire and electrical shock hazards. When servicing it is essential that only manufacturer specified parts be used for the critical components in the shaded areas of the schematic.

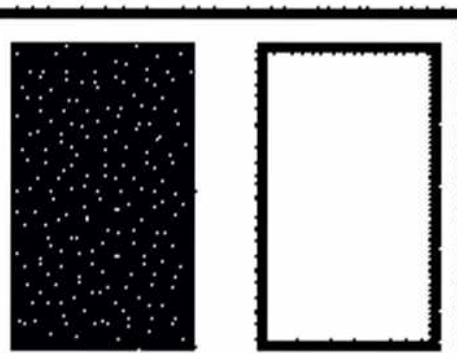



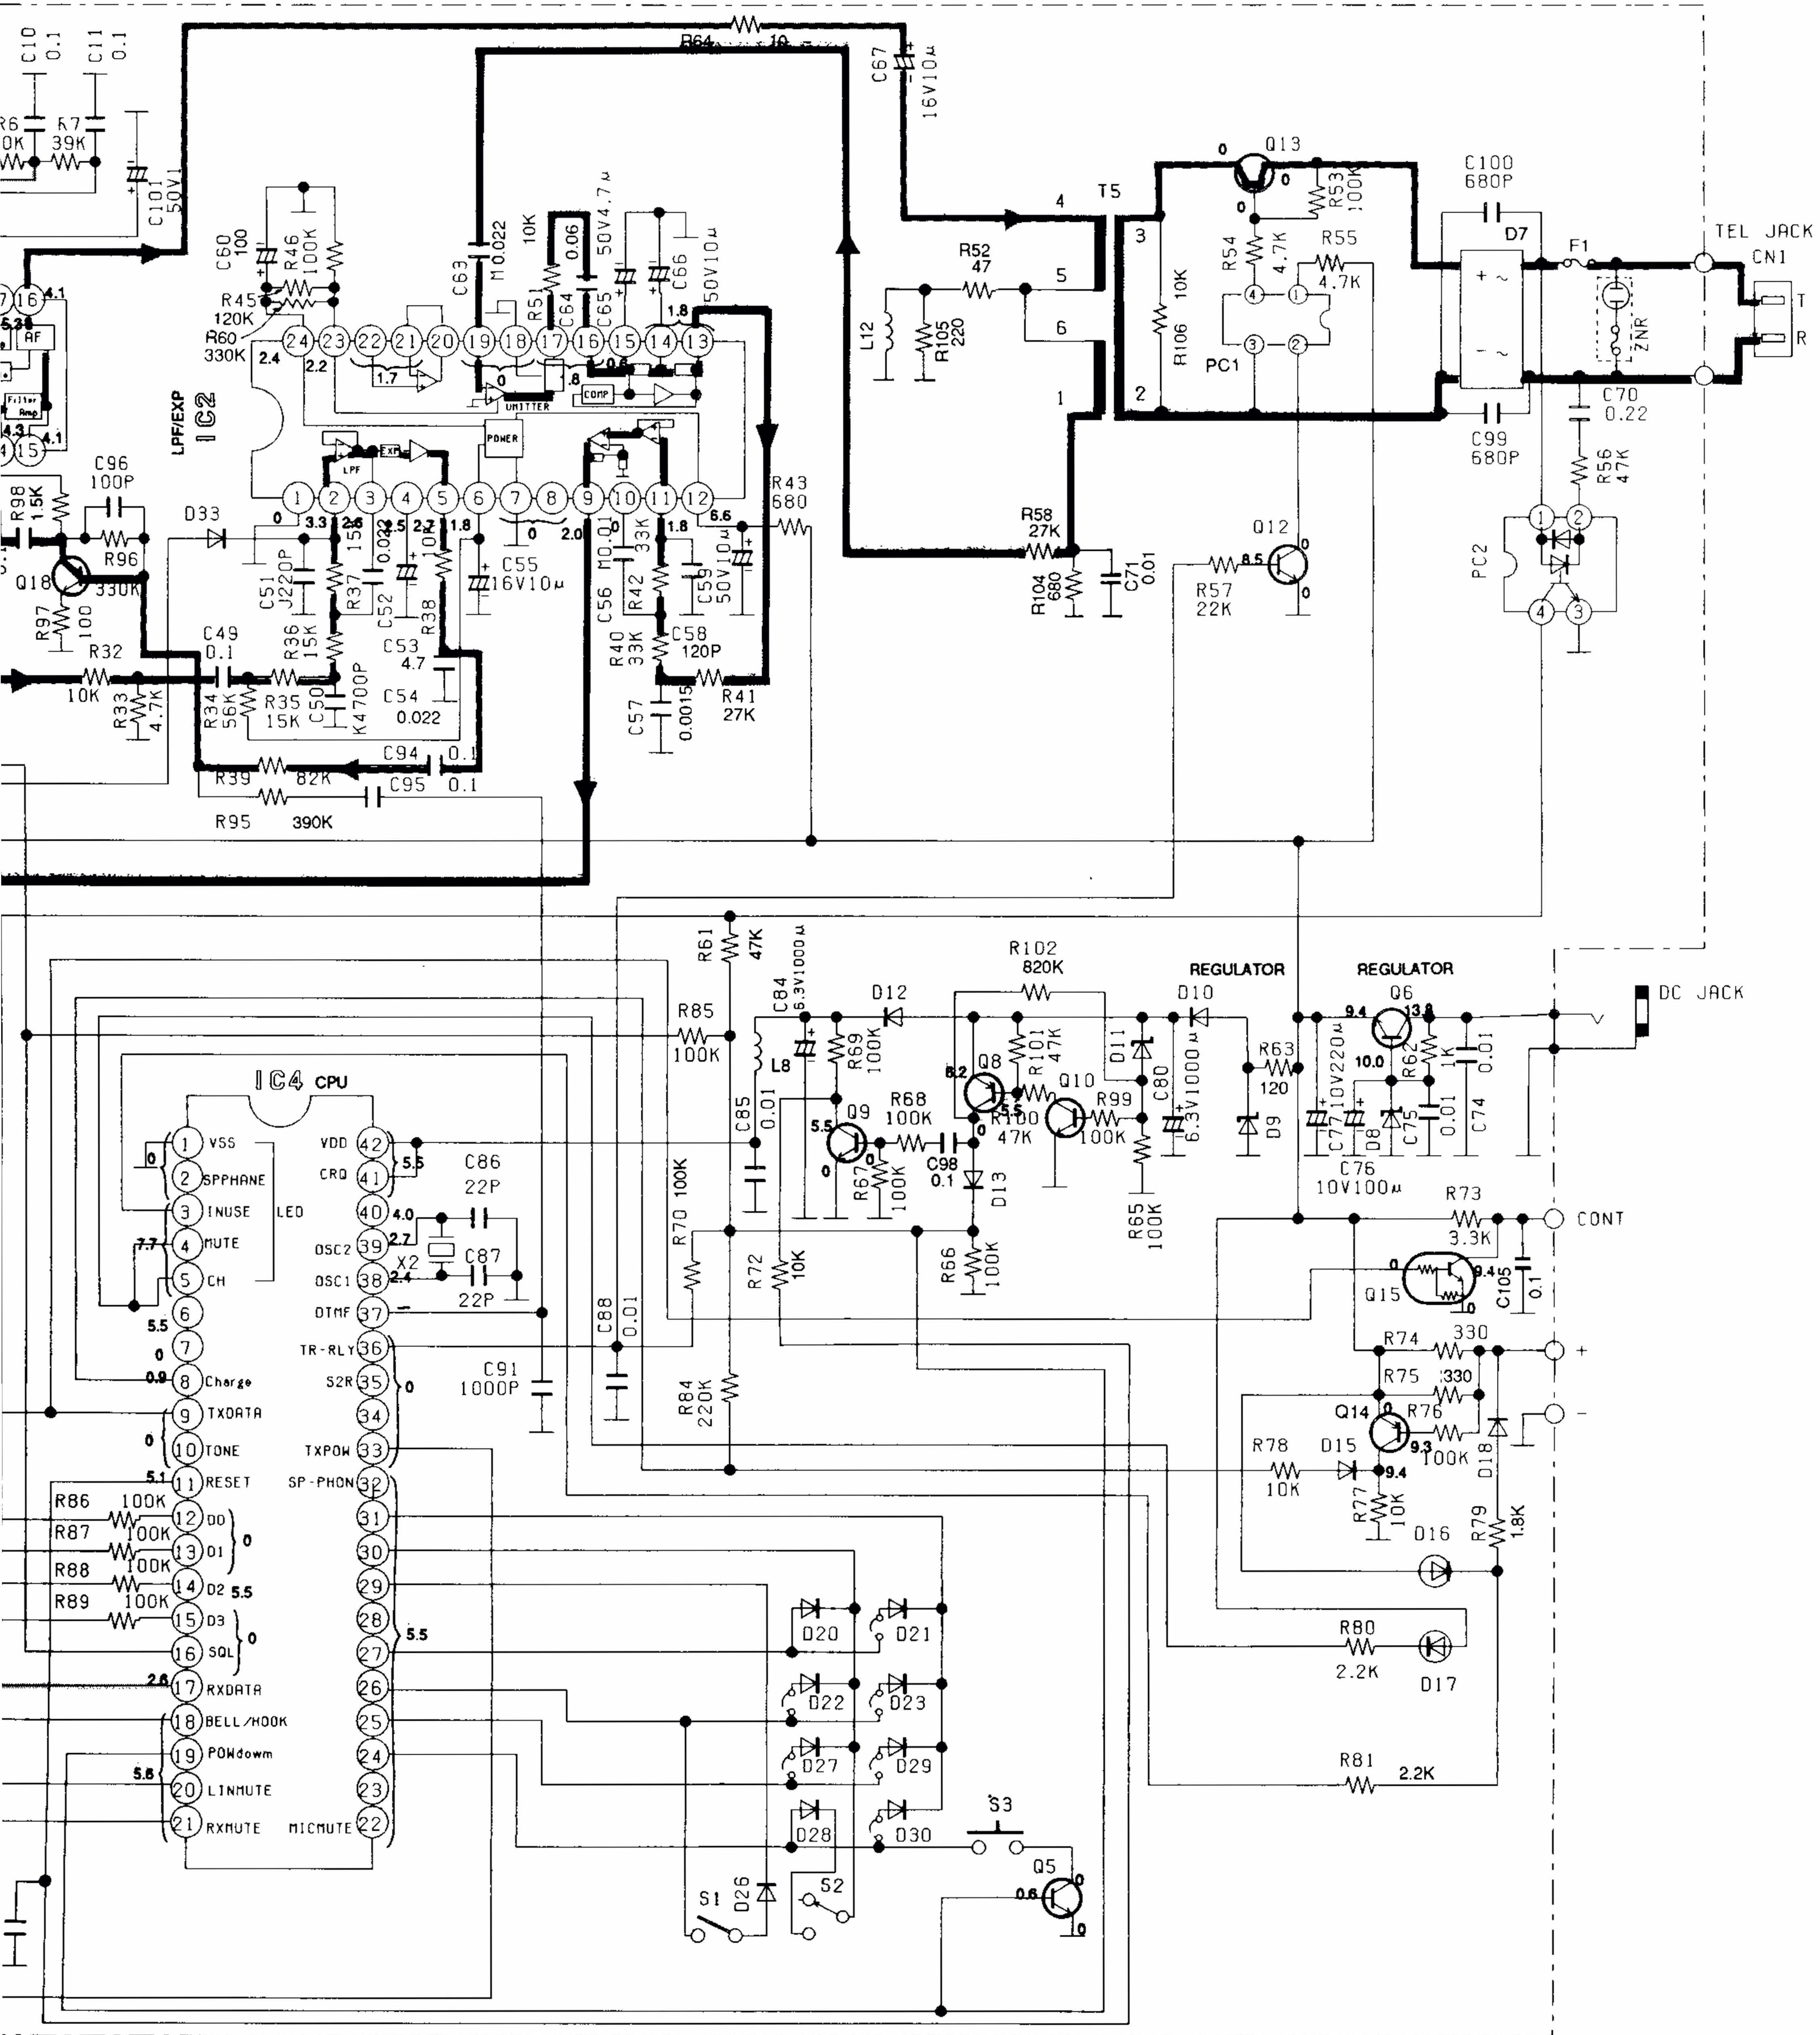


diagram incor-
protection from
y manufacturer's
l components in

This schematic diagram may be modified at
any time with development of new
technology.

TX Signal
RX Signal
Data Signal

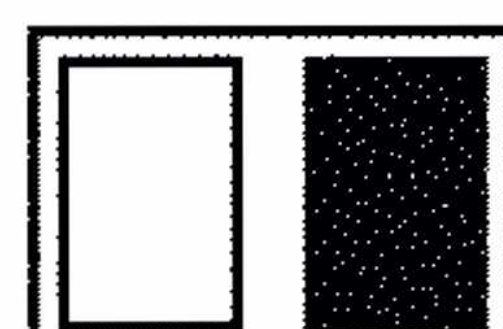

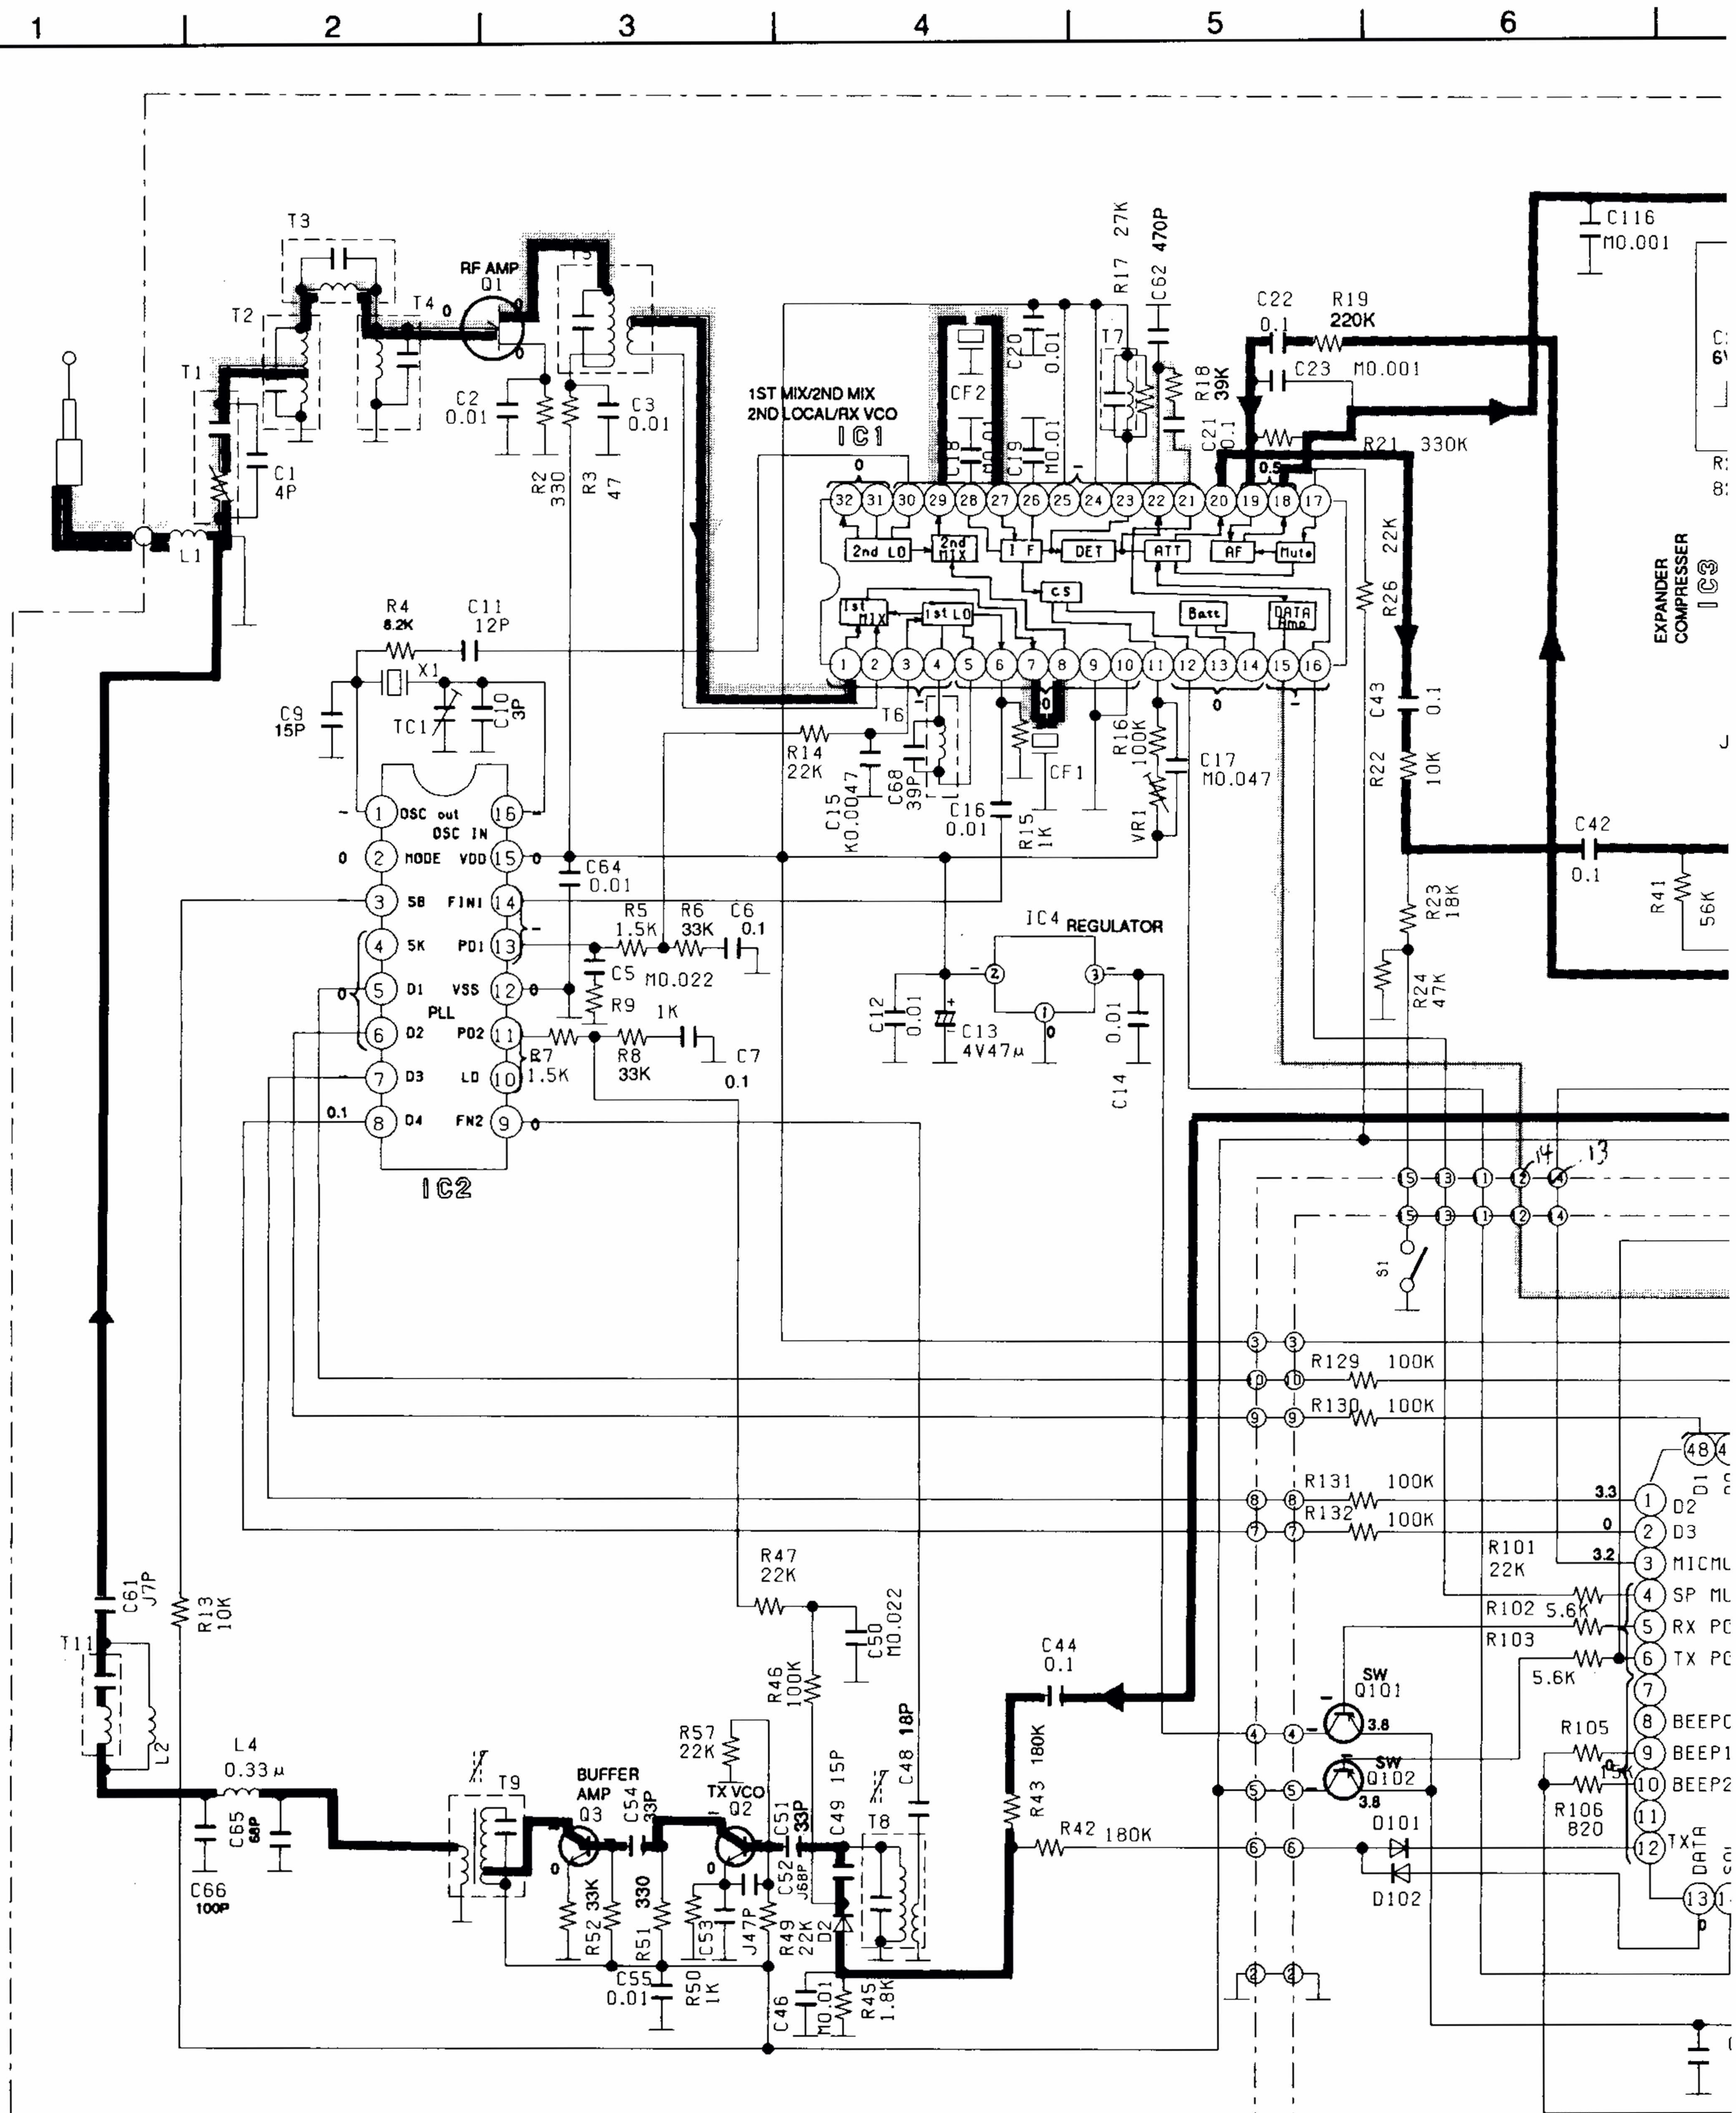

Notes:

1. S1: Volume Selector Switch in "HIGH" position.
2. S2: Power/Ringer switch in "OFF" position.

3. DC voltage measurements are taken with electronic voltmeter from negative voltage line.

STANDBY position

- TX Signal
- RX Signal
- Data Signal

