

**CMPSH-3**  
**CMPSH-3A**  
**CMPSH-3C**  
**CMPSH-3S**  
  
**SURFACE MOUNT**  
**SILICON SCHOTTKY DIODES**



The following configurations are available:

**CMPSH-3**      **SINGLE**  
**CMPSH-3A**    **DUAL, COMMON ANODE**  
**CMPSH-3C**    **DUAL, COMMON CATHODE**  
**CMPSH-3S**    **DUAL, IN SERIES**

**Central**<sup>TM</sup>  
Semiconductor Corp.

**DESCRIPTION:**

The Central Semiconductor CMPSH-3 series types are Silicon Schottky diodes designed for surface mount fast switching applications requiring a low forward voltage drop.

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )


	<b>SYMBOL</b>		<b>UNITS</b>
Peak Repetitive Reverse Voltage	$V_{RRM}$	30	V
Continuous Forward Current	$I_F$	100	mA
Peak Repetitive Forward Current	$I_{FRM}$	350	mA
Forward Surge Current, $t_p=10\text{ ms}$	$I_{FSM}$	750	mA
Power Dissipation	$P_D$	350	mW
Operating and Storage			
Junction Temperature	$T_J, T_{stg}$	-65 to +150	$^\circ\text{C}$
Thermal Resistance	$\Theta_{JA}$	357	$^\circ\text{C}/\text{W}$

**ELECTRICAL CHARACTERISTICS PER DIODE:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

<b>SYMBOL</b>	<b>TEST CONDITIONS</b>	<b>MIN</b>	<b>TYP</b>	<b>MAX</b>	<b>UNITS</b>
$BV_R$	$I_R=100\mu\text{A}$	30			V
$V_F$	$I_F=2.0\text{mA}$		0.29	0.33	V
$V_F$	$I_F=15\text{mA}$		0.40	0.45	V
$V_F$	$I_F=100\text{mA}$		0.74	1.00	V
$I_R$	$V_R=25\text{V}$		90	500	nA
$I_R$	$V_R=25\text{V}, T_A=100^\circ\text{C}$		25	100	$\mu\text{A}$
$C_T$	$V_R=1.0\text{V}, f=1.0\text{ MHz}$		7.0		pF
$t_{rr}$	$I_F=I_R=10\text{mA}, I_{rf}=1.0\text{mA}, R_L=100\Omega$			5.0	ns


SURFACE MOUNT  
SILICON SCHOTTKY DIODES

SOT-23 CASE - MECHANICAL OUTLINE

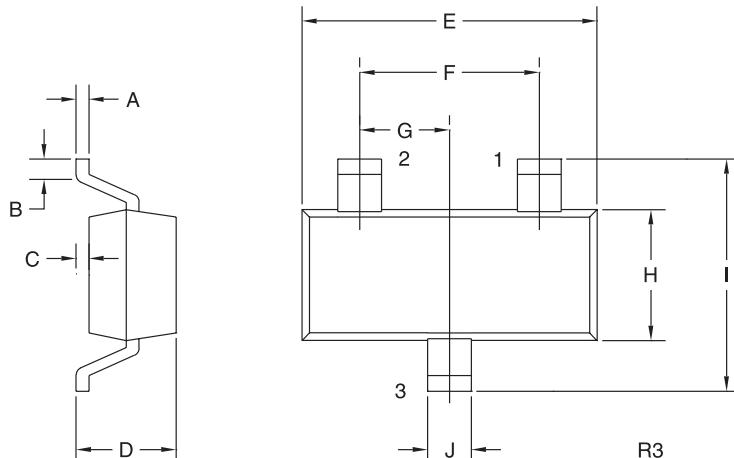

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.043	0.89	1.09
E	0.110	0.120	2.80	3.05
F	0.075	-	1.90	-
G	0.037	-	0.95	-
H	0.047	0.055	1.19	1.40
I	0.083	0.098	2.10	2.49
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R3)

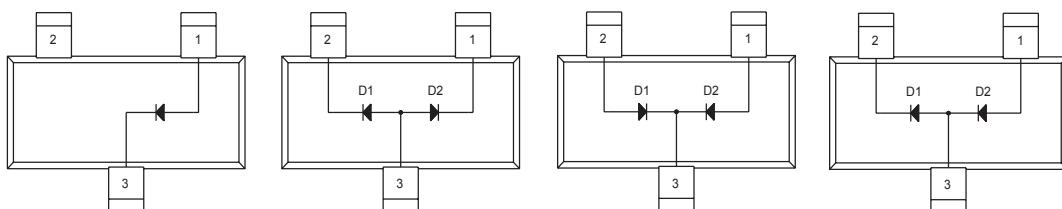

**CMPSH-3**

Lead Code:  
1) Anode  
2) N.C.  
3) Cathode

**CMPSH-3A**

Lead Code:  
1) Cathode D2  
2) Cathode D1  
3) Anode D1, D2

**CMPSH-3C**

Lead Code:  
1) Anode D2  
2) Anode D1  
3) Cathode D1, D2

**CMPSH-3S**

Lead Code:  
1) Anode D2  
2) Cathode D1  
3) Anode D1, Cathode D2