


2N2219

Wartości graniczne¹⁾

$U_{CB0 \text{ max}}$	60	V	$P_{tot \text{ max}}$	0,8 ¹⁾	W
$U_{CE0 \text{ max}}$	30	V	$P_{tot \text{ max}}$	3 ³⁾	W
$U_{EB0 \text{ max}}$	5	V	$t_{j \text{ max}}$	175	°C
$I_C \text{ max}$	0,8	A	t_{stg}	-65 ÷ +200	°C

¹⁾ $t_{amb} = 25^\circ\text{C}$

³⁾ $t_{case} = 25^\circ\text{C}$

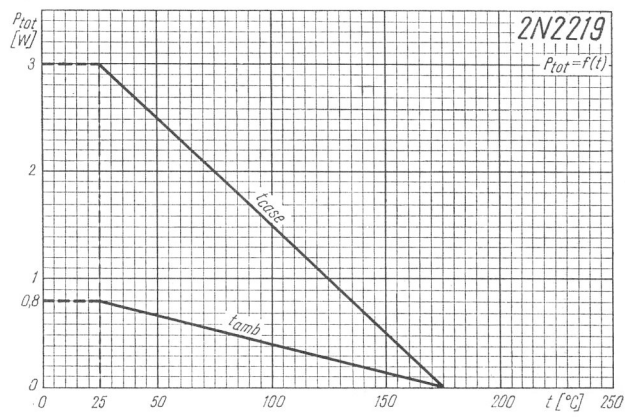

Rys. 1-1167. Zależność całkowitej mocy strat od temperatury